



## New York City Panel on Climate Change 4<sup>th</sup> Assessment Climate Change and New York City's Flood Risk

Bernice Rosenzweig,<sup>1</sup> Franco A. Montalto,<sup>2</sup> Philip Orton,<sup>3</sup> Joel Kaatz,<sup>4</sup> Nicole Maher,<sup>5</sup> Jerry Kleyman,<sup>4</sup> Ziyu Chen,<sup>3</sup> Eric Sanderson,<sup>6</sup> Nirajan Adhikari,<sup>2</sup> Timon McPhearson,<sup>7,8</sup> Pablo Herreros-Cantis<sup>9</sup>

<sup>1</sup> Sarah Lawrence College, Bronxville, NY.

<sup>2</sup> Drexel University, Philadelphia, PA and eDesign Dynamics LLC, New York, NY.

<sup>3</sup> Stevens Institute of Technology, Hoboken, NJ.

<sup>4</sup> Arcadis, New York, NY

<sup>5</sup> The Nature Conservancy, Cold Spring Harbor, NY.

<sup>6</sup> New York Botanical Garden, New York, NY.

<sup>7</sup> Urban Systems Lab, The New School, New York, NY.

<sup>8</sup> Cary Institute of Ecosystem Studies, Millbrook, NY.

<sup>9</sup> Basque Center for Climate Change, Leioa, ES.

### Correspondence should be addressed to:

#### **Bernice Rosenzweig, Ph.D.**

*Osilas Endowed Professor in Environmental Studies*

*Sarah Lawrence College, Bronxville, NY.*

[brosenzweig@sarahlawrence.edu](mailto:brosenzweig@sarahlawrence.edu)

ORCID ID: 0000-0002-4888-3653

#### **Franco Montalto, Ph.D.**

*Professor, Civil, Architectural and Environmental Engineering*

*Drexel University, Philadelphia, PA.*

[fam26@drexel.edu](mailto:fam26@drexel.edu)

ORCID ID: 0000-0001-8920-1834

### Abstract:

This chapter of the New York City Panel on Climate Change 4 (NPCC4) report provides a comprehensive description of the different types of flood hazards (pluvial, fluvial, coastal, groundwater, and compound) facing New York City (NYC) and provides climatological context that can be utilized, along with climate change projections, to support flood risk management (FRM). Previous NPCC reports documented coastal flood hazards and presented trends in historical and future precipitation and sea level but did not comprehensively assess all the city's flood hazards. Previous NPCC reports also discussed the implications of floods on infrastructure and the city's residents but did not review the impacts of flooding on the city's natural and nature-based systems (NNBS). This -- the NPCC's first report focused exclusively on flooding -- describes and profiles historical examples of each type of flood and summarizes previous and ongoing research regarding exposure, vulnerability, and risk management, including with NNBS and non-structural measures.

### Keywords:

*Flooding, Climate Change, Flood Hazards, Flood Risk Management, Natural and Nature-Based Systems, NPCC4*

### Recommended citation:

Rosenzweig, B., Montalto, F., Orton, P., Kaatz, J., Maher, N., Kleyman, J., Chen, Z., Sanderson, E., Adhikari, N., McPhearson, T., Herros-Cantis, P. (2024). *Climate Change and New York City's Flood Risk – Interim Report*. <https://climaeassessment.nyc>



# Table of Contents

<b>1</b>	<b>Chapter Summary</b> .....	<b>3</b>
	Key Messages .....	3
<b>2</b>	<b>Introduction</b> .....	<b>5</b>
	2.1 Chapter Scope and Context .....	5
	2.2 Chapter Organization .....	7
<b>3</b>	<b>Flood Risk</b> .....	<b>7</b>
	3.1 Flood Risk .....	7
	3.2 Flood Hazard .....	8
	3.3 Flood Exposure .....	9
	3.4 Flood Vulnerability .....	11
	3.4.1 Vulnerability of human communities .....	11
	3.4.2 Vulnerability of natural and nature-based systems .....	14
	3.5 Responses .....	15
<b>4</b>	<b>Pluvial Flooding</b> .....	<b>15</b>
	4.1 Pluvial Flood Hazard Characterization .....	15
	4.2 Historical Example: Ida-Remnants Cloudburst Pluvial Flooding .....	16
	4.3 Exposure and Vulnerability to Pluvial Flooding .....	21
	4.3.1 Pluvial flood hazard mapping .....	21
	4.4 Climate Change and Future Pluvial Flooding .....	23
	4.5 Persistent Knowledge Gaps: Pluvial Flooding .....	25
<b>5</b>	<b>Fluvial Flooding</b> .....	<b>26</b>
	5.1 Fluvial Flood Hazard Characterization .....	26
	5.2 Historical Example: Ida-Remnants Cloudburst Fluvial Flooding .....	26
	5.3 Fluvial Flooding Exposure and Vulnerability .....	27
	5.3.1 Buildings and critical infrastructure exposed to fluvial flooding .....	27
	5.4 Climate Change and Future Fluvial Flooding .....	28
	5.5 Persistent Knowledge Gaps: Fluvial Flooding .....	28
<b>6</b>	<b>Coastal Flooding</b> .....	<b>28</b>
	6.1 Coastal Flood Hazard Characterization .....	28
	6.2 Historical Example: Coastal Flooding on December 23, 2022 .....	29
	6.3 Coastal Flooding Exposure and Vulnerability .....	31
	6.4 Climate Change and Future Coastal Flooding .....	34
	6.5 Persistent Knowledge gaps .....	36
<b>7</b>	<b>Groundwater Flooding</b> .....	<b>37</b>
	7.1 Groundwater Flood Hazard Characterization .....	37
	7.2 Historical Example: Groundwater Flooding in Lindenwood .....	38
	7.3 Groundwater Flooding Exposure and Vulnerability .....	39
	7.3.1 Buildings and critical Infrastructure exposed to groundwater flooding .....	39
	7.4 Climate Change and Future Groundwater Flooding .....	40
	7.5 Persistent Knowledge Gaps: Groundwater Flooding .....	41
<b>8</b>	<b>Compound Flooding</b> .....	<b>42</b>
	8.1 Compound Flooding Hazard Characterization .....	42
	8.2 Historical Example: Tropical Storm Irene .....	43
	8.3 Compound Flooding Exposure and Vulnerability .....	43



8.4	Climate Change and Future Compound Flooding.....	43
8.5	Persistent Knowledge Gaps: Compound Flooding .....	44
<b>9</b>	<b>Flood Risk Management (FRM) .....</b>	<b>44</b>
9.1	Context for Flood Risk Management (FRM) .....	44
9.2	Scope of Flood Risk Management (FRM).....	45
9.3	Pros, Cons, and Caveats of Different FRM strategies .....	47
9.3.1	Resistance responses .....	47
9.3.2	Resilience responses .....	48
9.3.3	Natural and Nature-based Systems (NNBS) responses .....	48
9.3.4	Non-structural responses .....	50
9.3.5	The need for an integrated response .....	52
9.4	FRM in NYC .....	52
<b>10</b>	<b>Opportunities for Future Research .....</b>	<b>55</b>
10.1	Continue to monitor, model, and map all flood hazards, and their interactions, across NYC .....	56
10.2	Continue to develop flood vulnerability indices like the FSHRI, which can be used to support the equitable allocation of resources for flood risk management in priority neighborhoods .....	57
10.3	Grant decision-making power and resources to non-governmental stakeholders to develop community-driven FRM plans at the neighborhood and/or landscape scale.....	57
10.4	Develop incentives, policies, and enable comprehensive transformations of the city emphasizing long-term flood resilience, sustainability, and equity, highlighting the role of NNBS.....	58
<b>11</b>	<b>Traceable Accounts.....</b>	<b>59</b>
<b>12</b>	<b>Sustained Assessment .....</b>	<b>65</b>
<b>13</b>	<b>References.....</b>	<b>66</b>

# 1 Chapter Summary

The purpose of this chapter is to provide a comprehensive description of the different types of flood hazards (pluvial, fluvial, coastal, groundwater, and compound) facing NYC and to provide climatological context that can be utilized, along with climate change projections, to support flood risk management (FRM). Previous NPCC reports documented coastal flood hazards and presented trends in historical and future precipitation and sea level but did not comprehensively assess all the city’s flood hazards. Previous NPCC reports also discussed the implications of floods on infrastructure and the city’s residents but did not review the impacts of flooding on the city’s NNBS. This -- the NPCC’s first report focused exclusively on flooding – describes and profiles historical examples of each type of flood and summarizes previous and ongoing research regarding exposure, vulnerability, and risk management, including with NNBS and non-structural measures.

## Key Messages

**Key Message 1:** NYC faces risks from four types of flood hazards: pluvial, fluvial, coastal, and groundwater, each with a unique geography of exposure that will expand in different ways in the future due to climate change. Identifying these four types as separate, but related, hazards is an important step in studying how they impact NYC, what FRM tools are available to address them, and where future research is needed. Climate adaptation planning must consider all four of these types of flood hazard and their potential impacts across a range of magnitudes, including very extreme events.

**Key Message 2:** Discussions about flooding often focus on risks within the Special Flood Hazard Areas (SFHA) mapped by the United States Federal Emergency Management Agency (FEMA). However, the FEMA SFHA maps present fluvial and coastal flood hazards only. The recently released NYC Stormwater Flood Maps represent the city’s first attempt to map pluvial and some compound flood hazards, with risks spread out over a much larger fraction of NYC. In the coming year, the USGS and NYCDEP will be embarking on a study to investigate and model groundwater flooding in Queens and Staten Island. In this chapter, we present a preliminary assessment of pluvial



and groundwater flood hazard exposure areas that can be utilized to support FRM. Additional research is necessary to develop hazard maps that represent a broader range of flooding hazards and their increase in magnitude in response to anthropogenic climate change.

**Key Message 3:** Much of NYC is exposed to pluvial flooding, which occurs when the intensity of precipitation exceeds the infiltration capacity of the soil and the hydraulic capacity of the sewer system. These conditions often occur during cloudbursts, short-duration periods of intense rainfall that can be embedded within large storm systems or occur as individual, hard-to-forecast thunderstorms. Intense rainfall has already been observed to have become more frequent in New York City since the mid-20th century and is projected to further intensify and occur more frequently with unmitigated climate change. Despite the increasing risk, pluvial flood hazards remain poorly understood. The NYC Floodnet project is beginning to collect observations of flooding when it occurs, but more monitoring of rainfall, in-sewer flows, and flooding, along with Hydrologic and Hydraulic (H&H) modeling of pluvial flooding processes and impacts is needed.

**Key Message 4:** In NYC, fluvial flood risks are spatially localized to areas of the Bronx and Staten Island where surface stream channels remain. In the remainder of the city, historical surface streams were filled and replaced, with their flow routed to the sewer system. As a result, fluvial flood hazard has largely been replaced by pluvial flood hazard in most of the city. Both fluvial and pluvial flood hazards will increase due to climate-change driven intensification of precipitation and elevation of sea level. While traditional floodplain management can be an effective strategy in reducing exposure to fluvial floods, a broader, watershed-scale approach that retains, detains, and redirects stormwater is needed to jointly manage pluvial and fluvial flood risks.

**Key Message 5:** Current and future coastal flood risks are caused by high storm tides, rising sea levels, and historical development on landfill over tidal marshes and nearshore areas. In Jamaica Bay, tides and storm surges have also been significantly elevated by historical dredging and landfilling, worsening chronic and extreme flooding. For example, on December 23rd, 2022, a major flood event around Jamaica Bay was caused, in part, by dredging that has led to amplified storm tides which were nearly a foot higher there than elsewhere in the harbor. Further improvement of our understanding of future coastal flood hazard is possible through downscaling of climate model data and modeling of multiple compounding flood drivers.

**Key Message 6:** Many NYC neighborhoods have very shallow groundwater tables and already experience groundwater flooding. These areas include parts of the city that were developed when groundwater levels were substantially lower due to historical pumping of groundwater for municipal water supply. Groundwater flood risk has the potential to be particularly significant in NYC because of the prevalence of subterranean infrastructure. Groundwater flood hazards have not yet been assessed citywide, but preliminary efforts are underway. Sea level rise may cause groundwater levels to rise, resulting in inflow and infiltration of groundwater into sewer pipes and subterranean spaces and inundation of topographically vulnerable locations from below. Improved characterization of spatially heterogeneous aquifer hydraulic properties and sustained monitoring of ground water levels will be necessary to develop projections for future groundwater flooding.

**Key Message 7:** Climate change is increasing the frequency of extreme precipitation events and elevating sea levels, increasing the likelihood of compounding either one of these flood drivers by the other. In addition, tropical and post-tropical cyclones (TCs) have caused severe storm surges and extreme rainfall to occur simultaneously. While assessment is limited by the small number of historical TC events, the limited evidence suggests that TCs can cause low-probability, dangerous compound flooding. Given the importance of TCs and limited historical data, a deeper understanding of compound flood hazard likely requires detailed modeling and downscaling to simulate such storms under the present and future climate.

**Key Message 8:** NYC's NNBS provide many valuable ecosystem services, including critical water regulation services that can play a role in FRM. However, many of these systems are themselves vulnerable to different flood hazards, especially along the coast. Research into how different types of NNBS are impacted by flood/storm surge events, hydroperiod changes, rising water tables and salinization is needed to better evaluate future changes in ecosystem services. Opportunities for designing NNBS to mitigate the impacts of various flood hazards need to be further explored.

**Key Message 9:** Comprehensive FRM plans must be designed to address the full range of flood hazards faced by individual communities. Planning must begin with participatory decision-making processes that establish



*neighborhood-specific levels of acceptable future flood risk. To reduce risks from current levels, FRM tailored to each community will include combinations of structural and non-structural approaches, including NNBS, that are implemented in ways that reduce social vulnerability and are also synergistic with community histories, needs, and goals.*

---


## 2 Introduction

### 2.1 Chapter Scope and Context

Located along the Atlantic coast with a year-round humid climate (Cui et al., 2021), NYC is subject to multiple types of flooding hazards (Figure 1). Even without climate change and independent of the significant anthropogenic morphological changes that have been made to the local geography, floods occur in this region due to extreme precipitation, coastal storm surges and high tides, high groundwater tables, and their co-occurrence (Figure 2). Over four centuries of urbanization, the city's land surface, streams, wetlands, underwater habitats, coasts and soils have all been radically modified (Montalto & Steenhuis, 2004; P. M. Orton, Sanderson, et al., 2020; Sanderson & Brown, 2007; Walsh & LaFleur, 1995). In addition, global climate change has elevated regional sea level, increasing the likelihood of coastal flooding (Braneon et al., 2024) and making it more difficult for sewers, rivers and streams to drain to the sea. In the absence of significant and rapid reductions in greenhouse gas emissions, sea levels will continue to rise and extreme precipitation events are projected to become more frequent, more intense, and possibly also larger in areal extent (Braneon et al., 2024; Fowler, Ali, Allan, Ban, Barbero, Berg, Blenkinsop, Cabi, Chan, Dale, et al., 2021). Together these phenomena carry significant implications for future flood severity, frequency, and the resources needed to manage flood risks.


Previous NPCC reports discussed some types of flooding, along with historical and projected changes in their occurrence due to climate change. For example, Gornitz et al. (2019) provided projections for future sea level rise, while Patrick et al. (2019) and P. Orton et al. (2015) mapped static and dynamic coastal flood risks, respectively. Orton et al. (2019a) updated the projections of storm-driven coastal flood risk considering monthly high tides and storm surge due to a broadened set of sea level rise projections and extreme wind. González et al. (2019) analyzed the climatology of heavy precipitation in NYC, including observed heavy rainfall days and trends in subdaily precipitation events at different durations, and their meteorological drivers, evaluated fluvial flooding in regional streams, and assessed the use of 311 to report street flooding. Zimmerman et al. (2019) described some of the potential impacts of flooding on critical infrastructure systems. While this body of knowledge is extensive, none of the prior NPCC reports comprehensively reviewed and/or mapped historical and future trends in all types of NYC flood hazards.

This chapter broadens the prior NPCC-led discussion of climate change impacts on NYC flood risks. We review the current science on how climate change will impact different types of flood hazards and their associated risks on people and natural ecosystems. We also present an introduction to the key dimensions of flood risk management (FRM) including the use of structural and non-structural strategies and NNBS. The relationship of flooding to health is described in Matte et al. (2024), while the relationship to equity is covered in Foster et al. (2024). Future changes in population and transitions that may impact flood management are discussed in Balk et al. (2024).

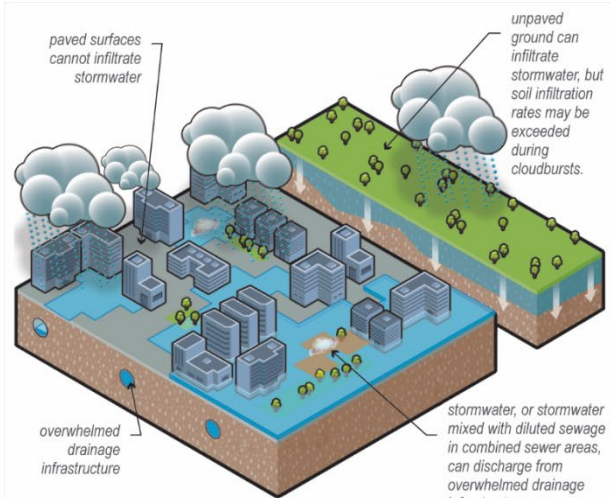


**pluvial flooding**

flooding that occurs when the intensity of precipitation exceeds the capacity of the land surface to infiltrate it and / or when the rate of runoff exceeds the conveyance and / or storage capacities of natural and engineered drainage systems. Pluvial flooding is commonly described as 'urban' flooding since it is a particularly important type of flooding in cities.

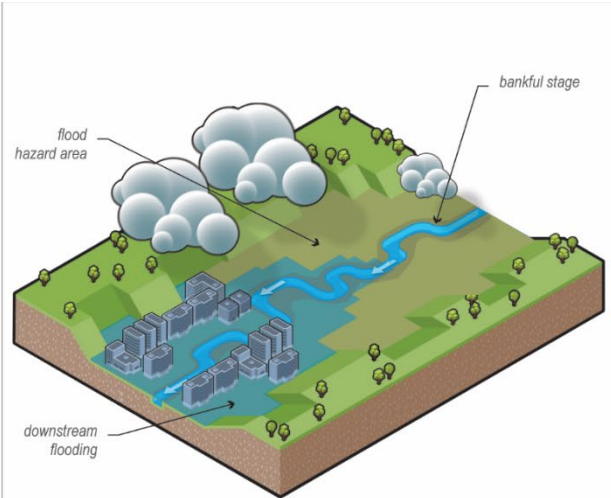


**fluvial flooding**

flooding caused when the stage of a river, creek, or stream exceeds the elevation of its banks; also known as river flooding.

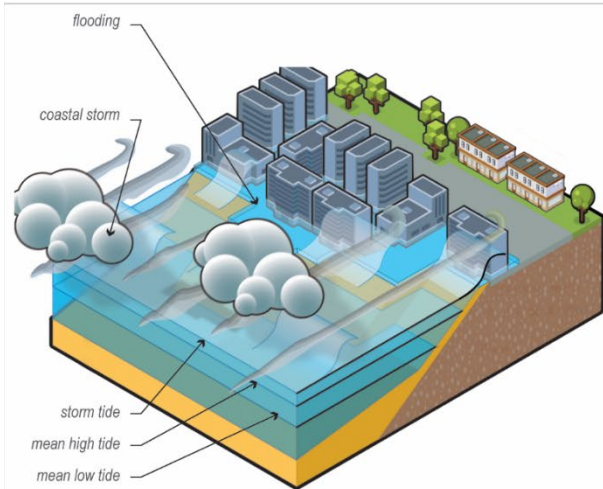

**coastal flooding**

flooding caused by high tides and storm surge. This type of flooding will be exacerbated by sea level rise.

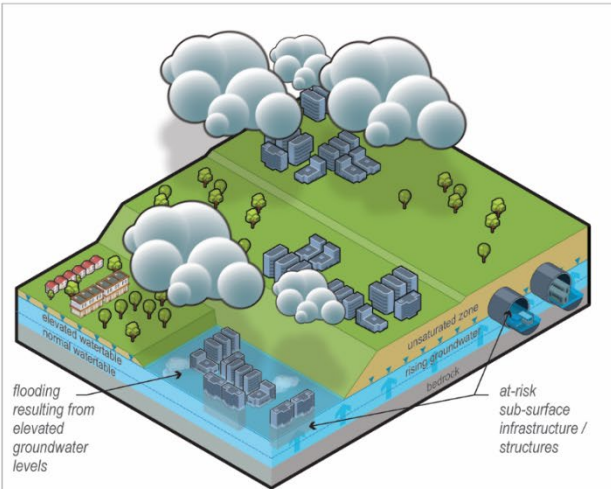

**groundwater flooding**

flooding caused when the water table rises to levels that cause inundation of the land surface or subterranean property.

Figure 1: The four types of floods that impact New York City (pluvial, fluvial, coastal, and groundwater). The impacts of these four flood types can be compounded when they occur in combination resulting in Compound Flooding (Section 8). Figures by the authors, adapted from UK Research and Innovation (UKRI) and the Natural Environment Research Council (NERC) / Ben Gilliland under Creative Commons License CC BY-NC 4.0.

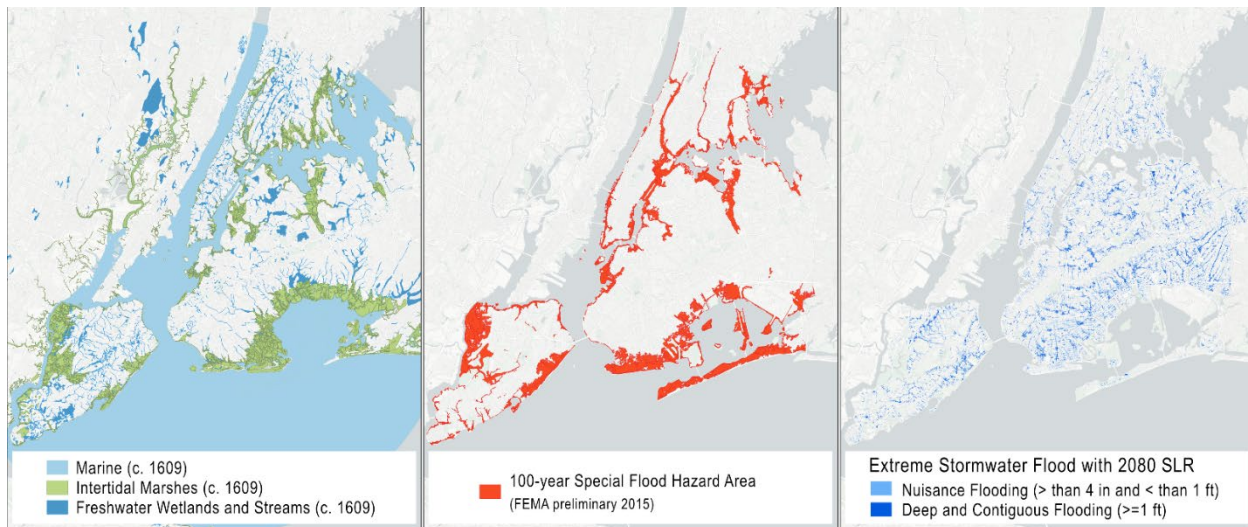


Figure 2: Historic streams and wetlands across the city (left), the FEMA 100-year Special Flood Hazard Area (center), and pluvial flooding resulting from ~3.5-inches of rain per hour with 58-inches of sea level rise (right). Areas where inland streams and coastal wetlands were landfilled for urban development tend now to be topographically low-elevation areas that are exposed to flooding. Areas landfilled to dispose of municipal waste and dredged sediment are now anomalously higher-elevation areas, even when located along the coast. The map of historic streams and wetlands was provided by Eric Sanderson and Lucinda Royte, New York Botanical Garden.

## 2.2 Chapter Organization

The chapter is organized as follows:

- Flood Risk
  - Types of flooding (including a hazard characterization, a historic example, assessment of exposure and vulnerability, discussion of how climate change is projected to affect this hazard, and identification of persistent knowledge gaps)
    - Pluvial flooding
    - Fluvial flooding
    - Coastal flooding
    - Groundwater flooding
    - Compound flooding (various combinations of the above)
  - Flood Risk Management
  - Opportunities and Future Research

## 3 Flood Risk

### 3.1 Flood Risk

In undeveloped landscapes, flooding is a natural hydrologic process that plays an important role in the fate and transport of nutrients and sediment, geomorphological evolution, and the function of ecosystems (Benito & Hudson, 2010; Junk et al., 1989; McClain et al., 2003). In heavily developed landscapes like NYC, flooding can have adverse consequences for both human and ecological systems. Floods occur because of dynamic interactions between human, natural, and atmospheric processes. Policies that determine how natural and engineered landscapes are managed; specify specific protocols for the planning, design, and management of infrastructure; and/or influence

certain types of human behavior can all significantly influence the occurrence of flooding and associated risks (Rainey et al., 2021).

A key climate change impact, flood risk is determined by four factors (Crichton, 1999; IPCC, 2023a).

1. The magnitude and frequency of flooding **hazards**,
2. The **exposure** of people, real property, natural ecosystems, and critical infrastructure to inundation when flooding occurs,
3. A variety of social, ecological, technological and infrastructure factors (Kim et al., 2022) that contribute to **vulnerability** to flooding, and
4. The **responses** that have been taken to mitigate flooding (e.g. **adaptation/transformation responses**), as well as any tradeoffs and/or unintended consequences of those responses or any other actions taken to address other societal needs that make flooding worse, commonly referred to as **maladaptation**.

Flooding creates risks when vulnerable people or ecosystems are exposed to flood hazards. Within cities, flood impacts can occur anywhere, e.g. within coastal and riverine floodplains but also at interior locations due to small-scale differences in topography, drainage system constraints, and building design (National Academies of Sciences, Engineering, and Medicine, 2019). Flood risks can also arise as unintended consequences of actions taken to address flooding or any other societal challenge (e.g. the construction of housing in flood hazard areas). Flood risk management (FRM) includes plans, actions, strategies, or policies taken to reduce the likelihood and/or magnitude of adverse potential consequences based on assessed or perceived risk (IPCC, 2023a). FRM can be accomplished by a variety of adaptation measures that may be implemented individually or in combination, by public and/or private entities from the Federal government down to individual landowners (IPCC, 2023b; Peck et al., 2022). Effective FRM requires equitable collaboration that is both vertical (e.g. across different governance levels) and horizontal (e.g. among various actors at any given level of governance), and must consider flooding's physical, social, and informational dimensions (National Academies of Sciences, Engineering, and Medicine, 2019).

### 3.2 Flood Hazard

Each of the four principal types of flooding that impacts NYC (pluvial, fluvial, coastal, and groundwater) are triggered by a wide range of associated hazards. For example, coastal flooding can occur due to infrequently occurring, but powerful storm surges that cause deep inundation over one or two tidal cycles; frequently occurring but moderate 'sunny day' high water that occurs during the highest astronomic tides each month; as well as by future sea level rise that will result in regular inundation of the lowest-lying areas of the city. Flood hazards can be amplified when they occur concurrently. This can include compound flooding (when coastal and rain-driven flooding occurs within the same event) or when multiple hazards with the same driver occur (such as the co-occurrence of pluvial and groundwater flooding, or pluvial and fluvial flooding, all of which are driven by precipitation).

The magnitude of a flood hazard at any given location is primarily characterized by the maximum depth of water inundation (Scawthorn et al., 2006). However, other factors may also strongly contribute to the magnitude of hazard during a flood event (Hossain & Meng, 2020; Wing et al., 2020). These include:

- **Fast-flowing water:** The force associated with flowing water can generate life-threatening conditions, even when floodwaters are only a few inches deep. The force of flowing water can cause pedestrians to be knocked down (Martínez-Gomariz et al., 2016; Musolino et al., 2020), and vehicles to be floated (Martínez-Gomariz et al., 2018), and can generate hydrodynamic forces that can destroy solid walls and dislodge buildings (FEMA, 2019). Fast flowing floodwaters can erode large volumes of soil and sand, undermining vegetation, bridge piers, sea walls and foundations. The transport and deposition of suspended sand and sediment, along with vehicles and other debris, can contribute to additional flood damages.
- **Waves:** Hydrodynamic forces caused by wave breaking, runup and slam can cause severe structural damage to buildings and other infrastructure located along the coast (FEMA, 2019; Hatzikyriakou & Lin, 2017).
- **Flooding rise time:** The time between the peak of a rain event that causes (pluvial and/or fluvial) flooding and the time of peak inundation (Gourley et al., 2013). Virtually all pluvial floods, and many fluvial floods in NYC are 'flash' floods, defined by the US National Weather Service (NWS) as events that have a rise time of less than 6 hours (Gourley et al., 2016). Fluvial floods along the Bronx River may have longer rise time due to the size of its watershed.





- **Inundation duration:** Describes the length of time over which an area remains inundated. Along with direct increases in the length of time of disrupted transportation, transport and utilities service, porous building materials exposed to floodwaters for longer durations have a greater likelihood of mold growth and corrosion (Marvi, 2020).
- **Water chemistry:** Floodwaters can transport dissolved and suspended contaminants, including potentially toxic chemicals or pathogens. The risk of waterborne infectious disease from exposure to floodwaters that have passed through combined and separate sewers is much greater than that associated with surface runoff (de Man et al., 2014; M.-C. Ten Veldhuis et al., 2010). Corrosion from saline coastal and groundwater inundation can cause additional damage to infrastructure and utilities (Abdelhafez et al., 2022; Tansel & Zhang, 2022) and can impact the health of urban trees and other vegetation that is not salt tolerant (Hallett et al., 2018a; Sacatelli et al., 2023; Woods et al., 2020).
- **Live electric current:** Submerged power lines or other inundated electrical systems can create areas of electrified floodwaters or conditions that allow people to otherwise contact live electric current. Jonkman and Vrieling (2008) estimated that 3% of global flooding deaths were caused by electrocution, as occurred in College Point, Queens in 2004 (See Table 2 below).

As a rule, the magnitude of a potentially hazardous weather event is inversely related to its annual probability of occurrence (Marshak & Rauber, 2022). As a result, the magnitude of floods and the weather events that drive them are often described by their return period (Equation 1), or the inverse of the probability that an event will occur in any given year:

$$R = \frac{1}{P}$$

*Equation 1: Return Period* – where R = The Return Period (years), also known as the Annual Recurrence Interval (ARI); P = Probability of occurrence in any given year (# occurrences / # years analyzed), also known as the Annual Exceedance Probability (AEP)

While the return period provides a convenient way to describe the probability of occurrence of a particular hazard, it can be easily misunderstood for several reasons. First, it does not provide information on the timing of actual events. For example, a 100-year precipitation event does not necessarily occur once every 100 years. Rather, this event has a 1% chance of occurrence every year on average and, statistically, can happen more than once in the same year or not happen for many hundreds of years. Second, precipitation events with the same return period can imply very different precipitation accumulations, (typically measured in inches), and intensities (typically measured in inches/hour). For example, in NYC a 100- year, 24-hour precipitation event implies the accumulation of almost three times the amount of precipitation as would be associated with a 100-year, 1-hour event. However, the 1-hour event is more than 8 times as intense. Third, climate change is altering both the mean and extreme values of climate variables like precipitation accumulations and sea level (Braneon et al., 2024), creating uncertainty in the estimation of the frequency with which a particular event occurs.

For all the reasons discussed above, event return periods derived from retrospective analyses of historical climate data may be outdated and inadequate for use in designing FRM strategies. The return periods associated with certain flood hazards are expected to decrease with climate change through the 21st Century, as the climate system accelerates. The NYC Climate Vulnerability, Impact, and Adaptation Analysis (VIA) will soon be releasing updated and forecasted future return periods for NYC precipitation. As such research evolves, effective communication between practitioners, scientists, and the public is necessary to avoid misinterpretation and misuse of return period terminology in FRM planning (Water Environment Federation, 2023).

Despite their shortcomings, return periods are commonly associated with flood hazards, and they are used throughout this chapter. The reader is advised to treat these return periods with caution, and as a rule, to use the physical characteristics of the event (e.g. its duration, intensity, frequency, spatial extent, etc.) as a more precise descriptor of the flooding driver.

### 3.3 Flood Exposure

Exposure describes “the presence (location) of people, livelihoods, environmental services and resources, infrastructure, or economic, social, or cultural assets in places that could be adversely affected by physical events and which, thereby, are subject to potential future harm, loss, or damage” (IPCC, 2012). For any specific flood hazard, exposure is a descriptor of what areas were affected by the hazard and who and what is in the affected area.

Due to NYC's density, critical infrastructure and thousands of people can be exposed to flooding, even when inundation is only limited to several city blocks.

Potential exposure to different flood hazards is typically evaluated using flood hazard maps. Flood hazard maps present the area over which a specific flood hazard has a defined probability of occurring. The most well-known flood hazard maps are the SFHA developed by FEMA, which are widely used to support city flood management. The SFHA identifies geographic areas that have a 1% chance of coastal and fluvial flooding each year (100-year return period) with an inundation depth greater than 1 foot. Additional mapped hazard areas provided by FEMA include areas within the SFHA that also experience waves of at least 3 feet in height above the base flood water level, and areas associated with the 0.2% (500-year storm surge or fluvial flood).

The term 'floodplain' is commonly used to describe FEMA's SFHA, but only a small fraction of NYC's flood hazard areas are classically defined floodplains- e.g. relatively flat alluvial landforms adjacent to rivers that are formed by processes associated with periodic flooding of the river (Benito & Hudson, 2010; Wolman & Leopold, 1970). This distinction has important implications for understanding flooding processes, risk, and potential opportunities to enhance the resilience of areas of the city exposed to flooding. To avoid confusion, in this chapter we use the more physically representative term 'SFHA' to refer to coastal and riverine flood hazard areas identified by FEMA.

When mapping flood risks, it is also important to be mindful of 'what is being exposed to what' (Carpenter et al., 2001). Flood hazard maps only represent areal exposure to a specific flood hazard – for example, areas exceeding a specific depth of inundation associated with an event with a specific return period. Areas outside of this zone may still be highly exposed to flooding from a higher magnitude (e.g. higher return period) event or from other types of flood hazards. Within any flood hazard area there is often likely to be a spectrum of exposure – with different locations exposed to different water depths and/or different combinations of flood hazards.

Table 1. Flood Hazard Maps used for exposure assessment in this chapter. It is important to note that each layer is associated with different probabilities of annual occurrence. **Maps of Present-Day Hazard Areas**

Hazard	Return Interval	Type of Flooding	Methods	Source
Pluvial flooding (inundation depth greater than 4") from 2 inches of rain in one hour, falling uniformly across the city.	Approximately 10-year (10% probability each year)	Pluvial	InfoWorks ICM 1D-2D Hydrologic and Hydraulic (H&H) Hydrologic Modeling	Stormwater Resiliency Study (City of New York Mayor's Office of Resiliency, 2021)
Uncompounded (not co-occurring) storm surge and fluvial flooding (inundation depth greater than 1 foot); Base flood water depth is provided for most of the flood hazard area.	100-year (1% probability each year)	Coastal and Fluvial	HEC-RAS Modeling of identified water bodies	FEMA NYC Flood Insurance Study (FEMA, 2007, 2013)
Tidal Mean Monthly High Water (MMHW); Base Flood Depth associated with these tides varies across the hazard area.	0.08-year (1250% probability each year) in the 2020s	Coastal	3-D dynamic simulations of tides using the SECOM model with the NYHOPS operational setup	NPCC3 (P. Orton et al., 2019a)
Shallow Groundwater Areas: Areas where the depth to water table is estimated to be less than 10 feet below the land surface	n/a	Groundwater	Estimated based on pre-2013 water table observations and the topography of the land surface	(Monti et al., 2013a)

Maps Representing Potential Future Flood Hazard Due to Climate Change				
Pluvial flooding from ~3.5 inches of rain in one hour falling uniformly across the city, along with 58" of sea level rise; Inundation depth greater than 4" is delineated.	2080s 90 <sup>th</sup> percentile sea level rise	Pluvial	InfoWorks ICM 1D-2D Hydraulic and Hydrologic Modeling	Stormwater Resiliency Study (City of New York Mayor's Office of Resiliency, 2021)
Tidal Mean Monthly High Water (MMHW with 58" of sea level rise); Base Flood Depth associated with these tides varies across the hazard area.	2080s 90 <sup>th</sup> percentile sea level rise	Coastal	3-D dynamic simulations of tides using the SECUM model with the NYHOPS operational setup	NPCC3 (P. Orton et al., 2019a)

The dense, highly built-up environment of NYC presents unique challenges for providing direct counts of exposed populations. The smallest spatial unit at which population density data is available is the census block, which in NYC can represent several thousand residents (Manson et al., 2021). But flood hazard areas are often discontinuous and small relative to the size of census blocks, with boundaries that do not spatially coincide with them. In addition, at any given location in NYC, populations are often distributed vertically, with relevance for the evaluation of flood exposure. While residents on higher floors may be exposed to significant indirect impacts from flooding (such as loss of utilities or isolation), their exposure is very different from populations in ground-level or subgrade residences that may be exposed directly to deep inundation. Dasymetric mapping techniques can be used to apportion census block populations to flood hazard areas. However, these techniques have not historically been used to represent the vertical distribution of populations. Three dimensional dasymetric mapping of urban populations have only been introduced recently (Maroko et al., 2019; Pérez-Morales et al., 2022) and, to date, this approach has not been applied in NYC.

Throughout this chapter, maps depicting exposure of NYC's buildings to the flood hazard areas listed in Table 1 are presented. Because the Flood Insurance Studies (FEMA, 2007, 2013) used to delineate FEMA's SFHA in NYC do not consider pluvial or groundwater flooding, nor the impact of climate change on future flood exposure, this chapter utilizes the additional hazard layers listed in Table 1. Current and future pluvial flood hazard maps were developed by the City of New York. The US Geological Survey identified areas with shallow groundwater tables that are subject to future groundwater flooding. NPCC researchers developed maps of coastal hazards based on Mean Monthly High Water (MMHW) (P. Orton et al., 2019a). Spatial data on buildings and subgrade spaces were obtained from the publicly available New York City Building Footprints and *MapPLUTO* cadastral datasets (City of New York Department of City Planning, 2022; NYC OTI, 2023).

### 3.4 Flood Vulnerability

The term 'vulnerability' is used broadly in a variety of fields, including natural hazards management and everyday language. In this chapter, we define vulnerability as 'the propensity or predisposition' (IPCC, 2022, 2023a) of an individual, community, or natural system to be adversely affected by a flood, referring specifically to their 'capacity to anticipate, cope with, resist, and recover from the adverse effects of physical events' (IPCC, 2012). Flooding can cause many direct adverse effects in exposed communities, including loss of life (Table 2), injuries, and damage to property and utilities from inundation. It can also cause a variety of indirect adverse effects, including the disruption of transit and transportation, extended loss of electricity, heat, and other utility service, health impacts from mold or pathogen exposure, and stress, and can contribute to the involuntary displacement of individuals and communities (Ahern et al., 2005; Sampson et al., 2019; J. A. E. Ten Veldhuis, 2011; J. A. E. Ten Veldhuis & Clemens, 2010). Flooding can also disrupt, damage, or destroy NNBS, reducing their innate ability to provide urban ecosystems services, including those needed to buffer the impacts of climate extremes.

#### 3.4.1 Vulnerability of human communities

Past floods have incurred significant known economic costs, but the true total costs borne by vulnerable NYC residents remain unquantified. In NYC, Post-Tropical Cyclone Sandy (2012) was estimated to have caused over \$19 billion dollars of damage to NYC including lost economic activity, with much of this damage attributed to storm surge flooding (City of New York Office of the Mayor, 2013). In 2021, a cloudburst associated with the remnants of

Hurricane Ida ('Ida-Remnants Cloudburst) triggered an estimate \$900 million (FMEA IA-\$158M, SBA -\$123M, NFIP-\$28M, NYS-ONA-\$1.5M, and CDBG-DR-\$310M) in known damages (*Personal Communication, NYC Office of Emergency Management (July 13, 2023)*). However, it is unlikely that such estimates include the total costs incurred by NYC residents. Nationally, existing flood data have been found inadequate in representing the magnitude of urban flooding impacts (National Academies of Sciences, Engineering, and Medicine, 2019). While typical flood damage estimates are based on flood insurance claims or financial assistance provided by FEMA or other federal agencies following a flooding disaster, most NYC residents, including many who live in areas highly exposed to flooding, do not have flood insurance. Additionally, the FEMA Individual Assistance Program may only cover a fraction of actual property damage costs and is only available during floods that are officially declared disasters by the President. Many impactful pluvial floods are highly localized and not declared disasters by FEMA (Lo, 2024), suggesting that the true total costs of flooding to residents of NYC could be substantially higher than published estimates.)

Table 2: Flooding events that caused 52 direct deaths in NYC since 1987. Additional fatalities from vehicle accidents associated with storm conditions are not included in this table.

Date	Type of Flooding	Description	Source
8/12/1993	Pluvial	An infant drowned in her basement when it flooded from heavy rains in Flushing, Queens.	(Lo, 2024)
8/11/2004	Pluvial	"Flash flooding of roads occurred at College Point, Queens. Two occupants of a vehicle were electrocuted by a fallen power line when they apparently stepped out of their vehicle into several feet of water."	(Lo, 2024)
10/29/2012	Coastal	36 fatalities were directly attributed to storm surge and high surf ( <i>Staten Island: 23; Queens: 6; Brooklyn: 5; Manhattan: 2</i> )	NCEI Storm Events Database Episode 70044 (NCEI, 2023)
9/1/2021	Pluvial	10 drowning deaths in subgrade apartments and residential offices in Queens.  1 drowning death in a subgrade apartment in Brooklyn.  1 drowning death outdoors after falling into a body of water during the storm (The body of a pedestrian was found floating in the Gowanus Canal the day after the storm.)  1 direct fatality from asphyxiation resulting from a car fire that was caused by flooding of a vehicle	(Lo, 2024; Yuan et al., 2024)

A combination of infrastructure and socioeconomic factors contribute to flood vulnerability (Zahran et al., 2008). To help to evaluate the vulnerability of NYC residents to flooding, a team of academic researchers, working in collaboration with experts from the NYC Interagency Climate Adaptation Task Force (ICAT), developed The New York City Flood Susceptibility to Harm and Recovery Index (FSHRI) (Figure 3) as part of the NYC Vulnerability, Impacts, and Adaptation (VIA) study. The FSHRI is an index of socioeconomic vulnerability (susceptibility to harm and capacity to cope and recover from flooding) based on social demographic indicators (Table 3) provided through the American Community Survey (ACS) at the census tract level. These indicators were selected based on empirical evidence in the social science literature on socio-economic parameters that are correlated with measures of flood outcomes (Madajewicz, 2020; Madajewicz & Coirolo, 2016; Rufat et al., 2015; Zahran et al., 2008). The outcomes considered in the empirical analyses include depth of water for exposure; loss of life or injury; amount of damage to a home, loss of employment, and/or loss of access to food or health care for susceptibility to damage; and cost of recovery and length of various aspects of recovery for capacity to recover. The FSHRI is part of a larger effort to develop NYC's first Flood Vulnerability Index (FVI), which includes the FSHRI together with scenarios of exposure to different types of flooding. The FVIs are available on the NYC Mayor's Office Environmental Justice Mapping tool (EJNYC Mapping Tool, n.d.).



Table 3: Indicators used in the Preliminary NYC FSHRI

1. Black, Indigenous, People of Color (% that identify as any racial category besides 'White' and/or ethnically Hispanic/Latino)
2. Income (Per capita)
3. Disability (% with a disability)
4. Language isolation (% speaking English less than "well")
5. Children (% below 5 years old)
6. Elderly (% Above 60 years old)
7. Elderly population living alone (% living alone above 65 years old)
8. Healthcare access (% without health insurance)
9. Household income (% households making less than \$75,000)
10. Home ownership (% households that are owner occupied)
11. Cost burdened households (% households spending 30% or more in their living costs)
12. Rent burdened households (% households spending 30% or more in their rental costs)

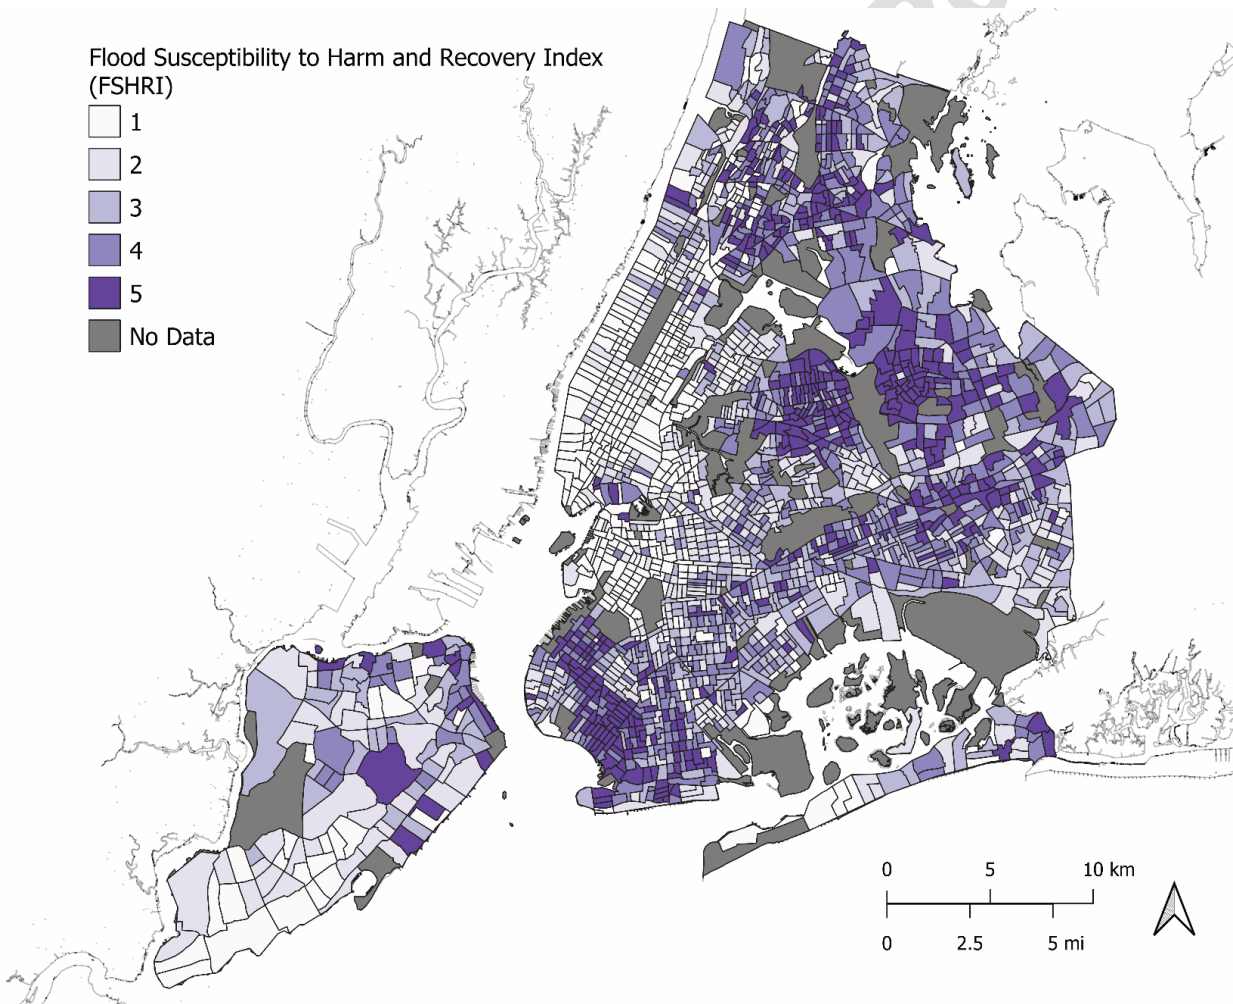


Figure 3: The Flood Susceptibility to Harm and Recovery Index (FSHRI), by census tract across NYC. Areas with higher socioeconomic vulnerability, as indicated by the FVI, may face more adverse effects if exposed to different types of flooding. The FSHRI does not consider exposure to any particular type of flooding. The NYC Flood Vulnerability Index, which includes the FSHRI and exposure to different types of flooding is available on the NYC Mayor's Office Environmental Justice Mapping tool. Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College.

Many features of the built environment contribute to, or reduce, vulnerability to flooding. For example, compared to traditional structures, buildings that have 'wet floodproofing' (measures that allow water to safely enter the enclosed areas of a house) or 'dry floodproofing' (measures that make a structure watertight below the level that needs protection) may be much less vulnerable even if they are highly exposed (NYC Planning, 2020). The placement and design of critical utilities, such as electrical, mechanical, and HVAC systems, can also be a key determinant of vulnerability. However, building-scale data on floodproofing and the elevation of critical utilities is not currently available. For this report we evaluate the exposure of two building typologies associated with both physical and socioeconomic buildings: 1-2 unit residential buildings with subgrade spaces (basements or cellars) and New York City Housing Authority (NYCHA) buildings. Residents of 1-2 unit residential buildings and residents of buildings with subgrade basements or cellars are more likely to experience costly and life-threatening flood damages than are residents of large multifamily buildings and buildings without inhabited subgrade space (City of New York Office of the Deputy Mayor for Administration, 2021; FEMA, 2019). For example, during the Ida-Remnants Cloudburst in 2021 (see Section 4.2), Small (1-2 family) residential buildings were disproportionately impacted, comprising 75% of the damaged buildings, while only representing 52% of buildings citywide (NYC OMB, 2023). Based on NFIP claims for Post Tropical Cyclone Sandy 2012, small residential buildings were also more likely to experience structural damage, particularly if built prior to modern flood resistant construction standards (NYC Planning, 2020). The presence of basements in older buildings can, themselves, contribute to structural damage during floods (FEMA, 2023a). In addition, basement apartments often provide a secondary source of income for small-residence property owners, who are often small landlords that live on-site. Basement apartments in these types of buildings disproportionately serve very low-income households, recent immigrants, and other socioeconomically vulnerable households that lack access to affordable options in the general housing market (NYC OMB, 2023).

Over 400,000 New Yorkers live in NYCHA residences, which can include many multi-generational communities with internal support structures and kinship networks that can help to reduce vulnerability to flood hazards, especially when compared with communities that lack such social cohesion (Beck, 2019; Bixler et al., 2021; Keene & Geronimus, 2011; Usamah et al., 2014). At the same time, NYCHA residents often face distinct socioeconomic and infrastructure vulnerabilities – they are disproportionately elderly, disabled, and low-income, and from groups that are victims of racism and ethnic marginalization (Hernández et al., 2018). Also, while substantial progress has been made in floodproofing and structurally reinforcing NYCHA buildings located in the FEMA SFHA since Post-Tropical Storm Sandy in 2012 (New York City Housing Authority, 2021) and pilot cloudburst management strategies are planned for some NYCHA developments (City of New York Office of Management and Budget, 2023; New York City Housing Authority, 2021), most NYCHA buildings outside the SFHA remain vulnerable to flooding. These vulnerability factors are exacerbated by a legacy of multidecadal deferred maintenance in many NYCHA properties (La Mort, 2018).

### **3.4.2 Vulnerability of natural and nature-based systems**

NYC's NNBS provide a wide range of regulating, provisioning, supporting, and cultural ecosystem services, to which many NYC residents attach significant value (Miller & Montalto, 2019). These include water regulating services that can help reduce the impacts of different types of floods, as described in detail in the recently published International Guidelines for Natural and Nature-based Features for Flood Risk Management (Bridges et al., 2021). But NNBS are also vulnerable to climate change since shifts in temperature, flood frequency, sediment and salt loading can all impact their function and ability to provide ecosystem services.

For example, sea level rise and storm surges will raise coastal groundwater tables and cause saltwater to enter coastal aquifers (Nordio et al., 2023). Changes to soil salinity can trigger complex changes to vegetation composition, ultimately favoring salt-tolerant species (Woods et al., 2020). Though salt adversely affects trees at all stages of growth and development, responses vary significantly by species (Dmuchowski et al., 2022; Middleton, 2016; W. Wang et al., 2019). Exposed to salt water, some tree species may have difficulty germinating by seed (Kirwan et al., 2007; Woods et al., 2020), while others may stop producing new leaves, senesce prematurely, fail to recruit new individuals, or die (Munns & Tester, 2008). Analyzing street trees in Post Tropical Cyclone Sandy's inundation zone three years after the storm, Hallet et al. (2018b) found that red maple (*Acer rubrum*) was negatively impacted by saltwater flooding but was able to recover over time. London plane trees (*Platanus x acerifolia*), by contrast, showed high mortality and no signs of recovery.

Tidal wetlands are particularly sensitive to changes in both mean sea level and tidal range. Tidal wetlands require regular cycles of surface flooding and exposure, as well as deeper and longer duration episodic flooding that typically occurs during spring tides and storm surges. Some storm events can supply a pulse of sediment that enables wetlands to keep pace with sea level rise and weather future storm events (Carey et al., 2017; Castagno et al., 2018; Orson et al., 1998; Yeates et al., 2020). In contrast, other large storms can produce high velocities and can deepen

channels and tidal flats, propagating waves further into tidal creeks, causing scouring and long-term erosion, even during subsequent calm conditions (Hauser et al., 2015; Leonardi et al., 2018).

The frequency of wetland inundation, also called its hydroperiod, is determined jointly by sea level and wetland elevation. Wetlands with hydroperiods that are extended due to sea level rise may undergo significant changes in structure and function (Fagherazzi et al., 2020; Montalto et al., 2006) that hinder their ability to provide ecosystem services such as water quality improvement, and wave attenuation, and can eventually lead to their loss (Valiela et al., 2023). In undeveloped landscapes, wetlands experiencing sea level rise migrate in a landward direction. However, in many parts of NYC, landward migration of tidal wetlands is impossible given the presence of engineered coastal infrastructure (e.g. highways, bulkheads, buildings, etc.) highlighting the importance of protecting existing and potential pathways (Calvin et al., 2018; Montalto & Steenhuis, 2004).

Tidal wetlands can also be sensitive to a reduction in hydroperiod, for example if a tide gate, barrier or other hydraulic restriction prevents high tide flooding (Montalto & Steenhuis, 2004). Less frequent flooding often results in a reduction in sediment delivery to the wetland surface. Wetlands that are sediment starved need active management and restoration to persist in place. Jamaica Bay marshes, for example, are sediment poor (Chant et al., 2021; Peteet et al., 2018) and extremely high nutrient loading impacts their structural integrity and ability to grow vertically (Deegan et al., 2012; B. R. Rosenzweig, Groffman, et al., 2018; Watson et al., 2014; Wigand et al., 2014). Courtney et al (2023) found that over a recent 20-year period, high tides propagated further into the groundwater aquifer of a brackish Hudson River tidal wetland even though the marsh surface elevation was increasing at a rate that matched sea level rise. This phenomenon was attributed to high tides increasing faster than mean sea level. Such impacts are significant given the importance of NYC wetlands in sustaining biodiversity and many critical and endangered species. Without active management, such wetlands undergo significant ecological changes (Morris et al., 2020) as outlined in detail in the City's Wetland Management Framework (Swadek et al., 2021).

Outside NYC and along the Eastern Atlantic coast, sea level rise has also been linked to a reduction in the distributional area of lichens (Allen & Lendemer, 2016), a modification of the position of the marsh-forest interface (Kirwan et al., 2007), reductions in carbon sequestration, above- and below-ground carbon storage potential (Meixler et al., 2023), and long term reductions in the radial growth of a coastal pine forest years after coastal inundation (Fernandes et al., 2018). More research is needed to determine the vulnerability of other NNBS to various flood hazards in NYC.

### **3.5 Responses**

Flood risks are heavily influenced by the responses that are taken to reduce perceived flood hazards. If these responses result in successful adaptation or transformation, they can reduce flood risks. Responses that inadvertently increase risk or vulnerability to a hazard are referred to as maladaptive. In the flooding context, actions that transfer flood risks from one place to another, reduce flood preparedness, stimulate development in flood hazard areas, cause gentrification, or increase the vulnerability of NNBS can all be considered maladaptive. A thorough exploration of responses that increase and decrease flood risks is provided in Section 9 of this chapter.

## **4 Pluvial Flooding**

### **4.1 Pluvial Flood Hazard Characterization**

Pluvial flooding occurs when the intensity of precipitation and resulting stormwater runoff exceeds the capacity of the land surface to infiltrate it, and/or when the rate of excess precipitation exceeds the stormwater conveyance capacities of natural and engineered drainage systems, resulting in surface ponding (B. R. Rosenzweig, McPhillips, et al., 2018). This process dominates the hydrologic cycle of most densely developed cities, which typically have a high percentage of buildings, pavements and other impervious surfaces that inhibit stormwater infiltration. As a result, pluvial flooding is often referred to as 'urban' flooding (Agonafir et al., 2023).

Although impervious surfaces are the primary contributor to pluvial flooding, this mechanism can also occur over pervious surfaces. When the intensity of short duration precipitation events, (commonly referred to as cloudbursts <sup>1</sup>, exceeds the infiltration capacity of pervious surfaces, the excess precipitation will accumulate and flow over the surface. This phenomenon is more likely when pervious surfaces are already saturated, and/or are covered with snow or ice (Andradóttir et al., 2021; Moghadas et al., 2018). Alizadehtazi et al. (2016) found that the infiltration capacity of urban park soils, tree pits without tree guards, porous pavers, and certain bioretention facilities were frequently below the intensity of the intensity of the 5 yr, 6 minute design storm used to design many components of the city's stormwater drainage systems, underscoring the potential of these pervious surfaces to produce runoff.

To reduce pluvial flooding, the city's separate and combined sewer systems were designed to intercept and convey 'excess precipitation' rapidly away from buildings and roads (Tarr, 2001). However, engineered drainage systems have a finite capacity, which is another key contributor to pluvial flood hazard. Three limitations of the sewer system that can contribute include: 1) the spacing and hydraulic capacity of different types of inlets, 2) hydraulic bottlenecks within the piped collection system, and 3) hydrologic overload. Each of these limitations is described in greater detail below.

- **Inlet conditions:** If stormwater is presented to sewer inlets at rates that exceed inlet hydraulic capacities, the excess runoff will bypass (even if the sewer pipes themselves are not full), causing pluvial flooding further down gradient. In general, grated inlets have higher hydraulic capacities than curb cuts, and curbcuts have greater hydraulic capacity if they are built with higher apron slopes and longer openings. Bypass can be exacerbated by adverse street slopes and/or if snow, leaves, litter, or other debris clogs stormwater inlets, reducing their interception capacities (Agonafir, Lakhankar, et al., 2022; Agonafir, Pabon, et al., 2022; Shevade et al., 2020; Shevade & Montalto, 2021). Bypass of inlets can also be triggered if there are blockages just downstream of the inlet, inhibiting free flow through them. The lack of an inlet can also trigger pluvial flooding if runoff accumulates in undrained topographic depressions.
- **Hydraulic bottlenecks:** Pluvial flooding can occur if the conveyance capacity of a particular segment of the engineered drainage system (e.g. a catch basin hood, a segment of pipe, a pump, etc.) is unable to convey stormwater through the system at the rate at which it is approaching that feature. Under these conditions, stormwater will back up within the pipes and can ultimately reach the surface through manholes and catch basins (known as a 'surcharge') and/or backup into low-lying buildings, subgrade spaces, and other topographically vulnerable areas.
- **Hydrologic overload:** During extreme precipitation events, some sewer pipes can become filled with water. Under these conditions, any additional rainfall, even at low intensities, will accumulate on the surface. The city's combined sewer system, which serves about 60% of the city and conveys both stormwater and wastewater in the same pipe network, was also designed with relief points to reduce the chances of surcharge or backup events. Known as CSOs, these features of the combined sewer system release untreated combined sewage into the city's surface water bodies, creating significant human and ecological health risks which could increase as climate change causes precipitation to increase.

Cloudbursts are a particularly important driver of pluvial flooding (B. Rosenzweig et al., 2019). Recent research by the VIA team (McPhearson et al., 2024) suggests that many historical pluvial flood episodes were triggered by short-duration (less than 6-hour) high intensity precipitation events. Cloudbursts may occur as highly localized, individual convective (thunderstorm) cells, or they can be embedded within larger storm systems, including tropical and post-tropical storms, large frontal systems, and Nor'Easters. The intense rain associated with any particular cloudburst is usually limited to small areas of the city, but intense rain can also be widespread if thunderstorms are organized into mesoscale storm systems (Smith et al., 2023).

The US National Weather Service provides Excessive Rainfall Outlook (ERO) forecasts, which can identify the large-scale weather and hydrological conditions associated with cloudbursts and flash flooding up to 5 days in advance (Burke et al., 2023). These regional forecasts are further enhanced for NYC based on event-specific mesoscale meteorological conditions, but current science is not able to provide forecasts of the exact location, areal extent, intensity, and timing of cloudbursts (L. Speight & Krupska, 2021). Advance warning of imminent potential flooding remains limited to radar-based observations of approaching extreme rainfall and in-situ observations of flooding that has already begun, with a nationwide average lead time of 61-68 minutes (Martinaitis et al., 2023). These forecasting challenges make emergency preparations and risk management for pluvial flooding particularly challenging.

## 4.2 Historical Example: Ida-Remnants Cloudburst Pluvial Flooding

New York City experienced widespread, severe pluvial flooding during a cloudburst on September 1, 2021 ('Ida-Remnants Cloudburst'). Flooding from this event caused 12 drowning fatalities in NYC, which included 11 deaths in subgrade residences and offices. A 13th direct fatality resulted from asphyxiation when the victim's flooded car caught fire. Figure 4 depicts flood related service requests during the event, along with the location of the residential drowning fatalities. As shown, many of these locations were far outside the most recently developed (Preliminary) SFHA (FEMA, 2013). Flooding from this event was also associated with extensive damage to property and critical infrastructure, displacement due to loss of living quarters, and major disruptions to transit and transportation networks (City of New York Office of Management and Budget, 2023; City of New York Office of the Deputy Mayor for Administration, 2021).



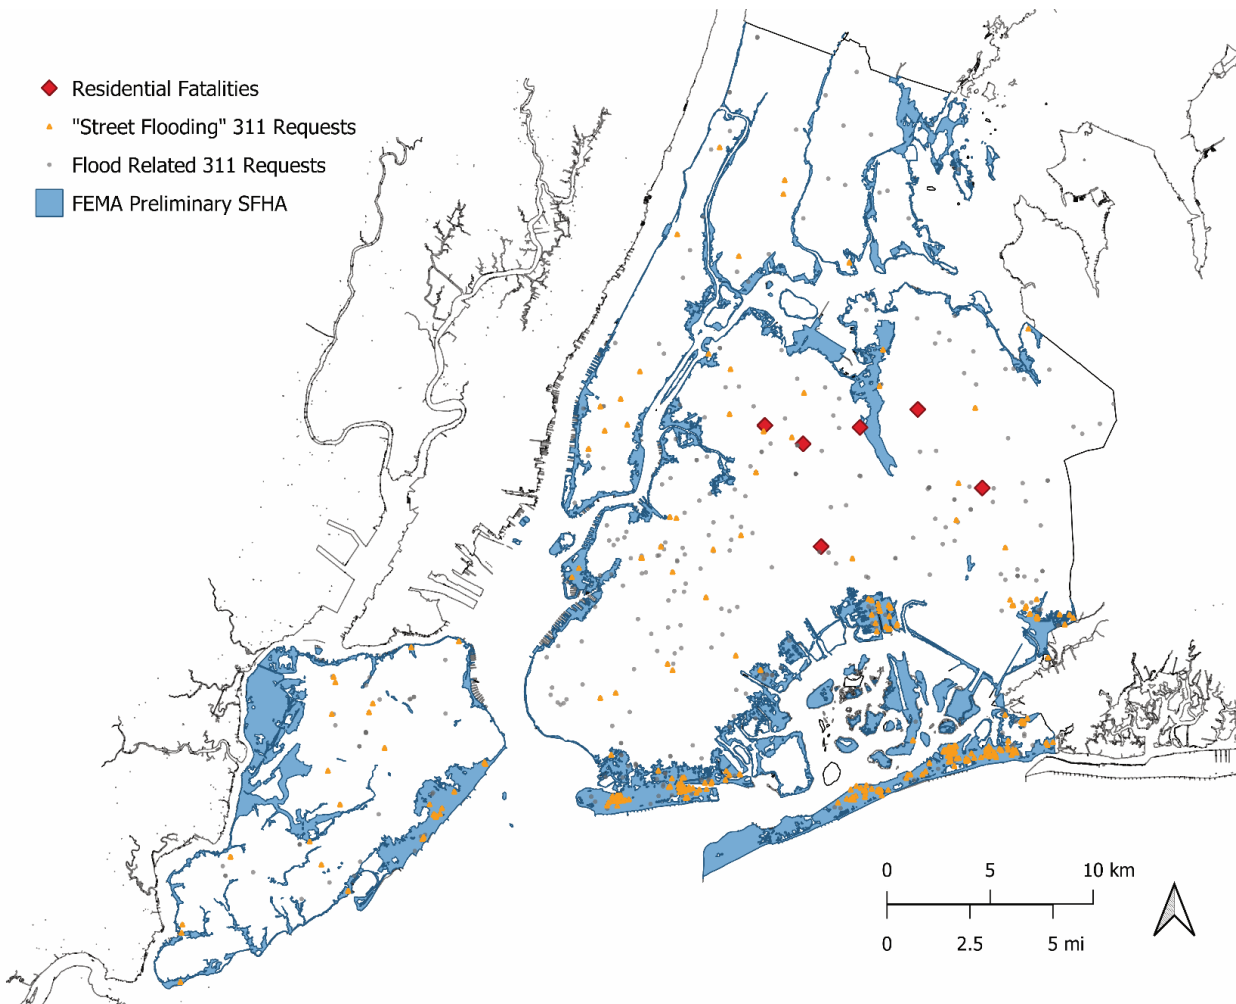


Figure 4: Fatalities in subgrade residences/offices, street flooding and flood-related 311 service requests in NYC during the Ida-Remnants Cloudburst (9/1/2023 - 9/2/2023). Along with 'Street Flooding', flood-related service requests include: 'Sewer Backup', 'Highway Flooding', 'Manhole Overflow', 'Possible Water Main Break', 'Catch Basin Clogged/Flooding', and 'Excessive Water in Basement'. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

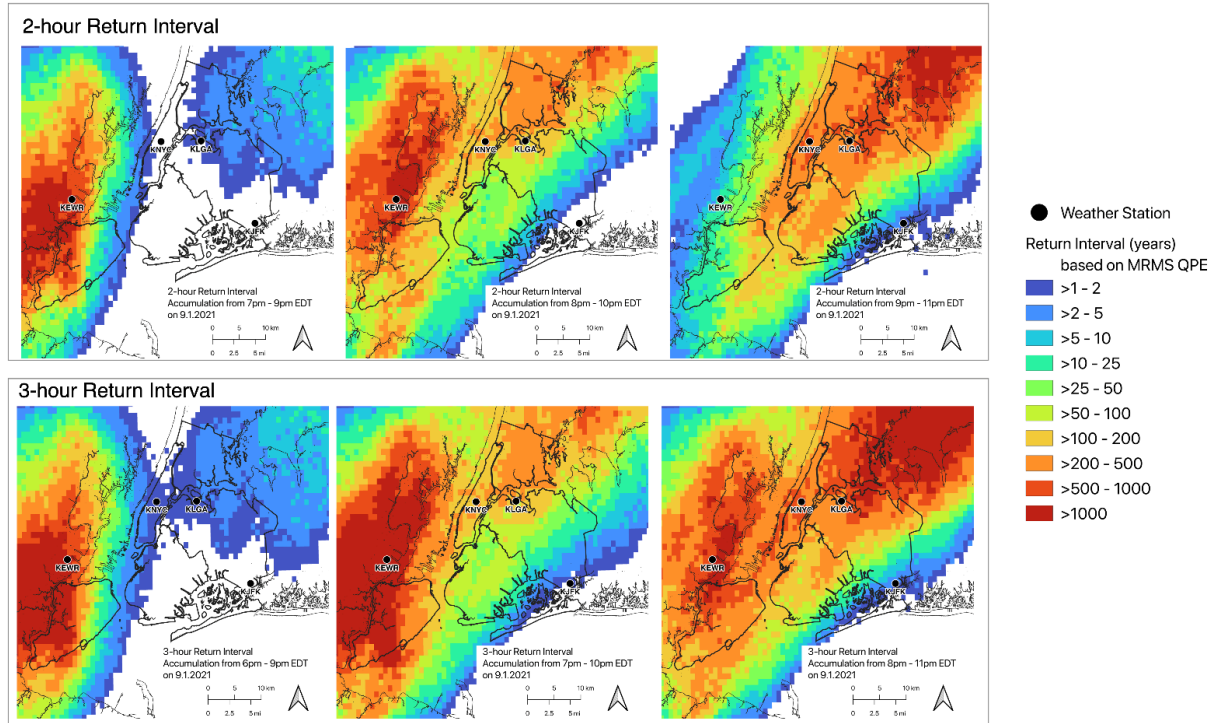


Figure 5: 2- and 3-hour return intervals across the city (during Ida) based on National Center for Environmental Prediction (NCEP) Multi-Resolution, Multi-Sensor (MRMS) Hourly Zip Files, 2021 Quantitative Precipitation Estimates (QPE) (Iowa Environmental Mesonet, 2023). Return intervals presented in these maps are based on NOAA Atlas 14 Intensity-Duration-Frequency (IDF) curves for the Central Park (KNYC) Weather Station. Extremely intense rain progressed from west to east across the city between 6pm and 11pm. Time series of precipitation at the area Automated Surface Observing System (ASOS) weather stations (KEWR: Newark Liberty International Airport; KNYC: Central Park Weather Station; KLGA: LaGuardia Airport; KJFK: John F. Kennedy International Airport) are provided in Figure 6. Graphic by BR Rosenzweig.





Figure 7: 83 high water marks (HWM) such as seed lines, mud, and debris were surveyed by the US Geological Survey in the weeks following the Ida-Remnants Cloudburst. ((Finkelstein et al., 2023) Using these observations, land surface inundation was estimated within an 820.2 ft (250m) buffer of each observed HWMs. During the Ida cloudburst, deep inundation from pluvial flooding occurred in areas that were far from the water bodies used as the basis of FEMA SFHA modeling. Flooding from this event was not limited to areas where HWMs were obtained, and also occurred in areas of the city that were not surveyed or where HWMs could not be identified. Several inundated areas are highlighted here and all HWM data from this survey can be viewed at: <https://stn.wim.usgs.gov/fev/#2021lda>. Map by BR Rosenzweig.

## 4.3 Exposure and Vulnerability to Pluvial Flooding

### 4.3.1 Pluvial flood hazard mapping

In 2018, the NYC City Council passed Local Law 172 (Local Law 172, 2018), which required city agencies to develop maps to identify areas of the city that will be most exposed to flooding due to climate change. Because the FEMA's SFHA maps do not include pluvial flood hazard areas, NYCDEP contracted with an academic and consultant team on a Stormwater Resiliency Study (City of New York Mayor's Office of Resiliency, 2021), which became the first effort to map pluvial flood hazards in NYC.

Since pluvial flooding is caused by hydrologic processes that create runoff (e.g. precipitation excess) volumes that can exceed the limited hydraulic capacity of various components of the surface (e.g. channels, gutters, inlets) and subsurface (e.g. pipes, pumps, weirs) collection systems, mapping pluvial flood hazards requires the use of numerical models that can represent these complex and coupled processes at high spatial and temporal resolution (B. R. Rosenzweig et al., 2021). The Stormwater Resiliency Study involved the development of 13 Hydraulic and Hydrologic (H&H) models using Innowyze's InfoWorks ICM software (AutoDesk, 2023), each representing a major sewer shed that drains into one of NYC's wastewater treatment plants. As detailed in the Stormwater Resiliency Plan (City of New York Mayor's Office of Resiliency, 2021), these models utilized a 1D-2D modeling approach. This coupled form of modeling is a recent advance and requires significant computing power and detailed topographic information. Some areas of the city, including large (>100,000 ft<sup>2</sup>) parks, large (>250,000 ft<sup>2</sup>) non-residential and non-commercial private lots, and any lots that intersect railway infrastructure were excluded from the resulting pluvial flood hazard maps due to a lack of information regarding their drainage system design (City of New York Mayor's Office of Resiliency, 2021).

The Stormwater Resiliency Study models were used to simulate flooding associated with the following three scenarios:

- **Moderate Stormwater Flood without Sea Level Rise:** ~2 inches of rainfall falling uniformly across the city in one hour.
- **Moderate Stormwater Flood with 2050's Sea Level Rise:** ~2 inches of rainfall falling uniformly across the city in one hour, co-occurring with coastal water levels elevated by 30 inches.
- **Extreme Stormwater Flood with 2080's Sea Level Rise:** ~3.5 inches of rainfall, falling uniformly across the city in one hour, co-occurring with coastal water levels elevated by 58 inches.

Each of these scenarios was simulated individually, as a singular event, without consideration of antecedent moisture conditions. Buildings were represented as obstructions. We utilize two of these three scenarios (Moderate Stormwater Flood without SLR and Extreme Stormwater Flood with 2080s SLR) in this report (Table 1).

To evaluate present day pluvial flood exposure, we use the Moderate Scenario with no Sea Level Rise. This is the only pluvial flood hazard layer that evaluates pluvial flooding associated with present-day mean high tide (Mean Higher High Water; MHHW) levels. This scenario identifies areas that are the most highly exposed to pluvial flooding – i.e., those that would experience inundation greater than 4 inches even from a relatively modest rain event of approximately 2 inches in one hour. Because this precipitation event is roughly associated with a 10-year return period, exposure cannot be directly compared to that of the FEMA SFHA, which is associated with 100-year (1% AEP) flooding. This scenario also represents less rainfall than occurred during the Ida remnants cloudburst which, in most of the city was a much more extreme event than this Moderate scenario, was spatially varying, and occurred for different durations in different portions of the city. Further, this hazard layer is a synthetic event and does not capture any operational or environmental conditions, such as catch basins being clogged due to leaves, ice, and/or debris.

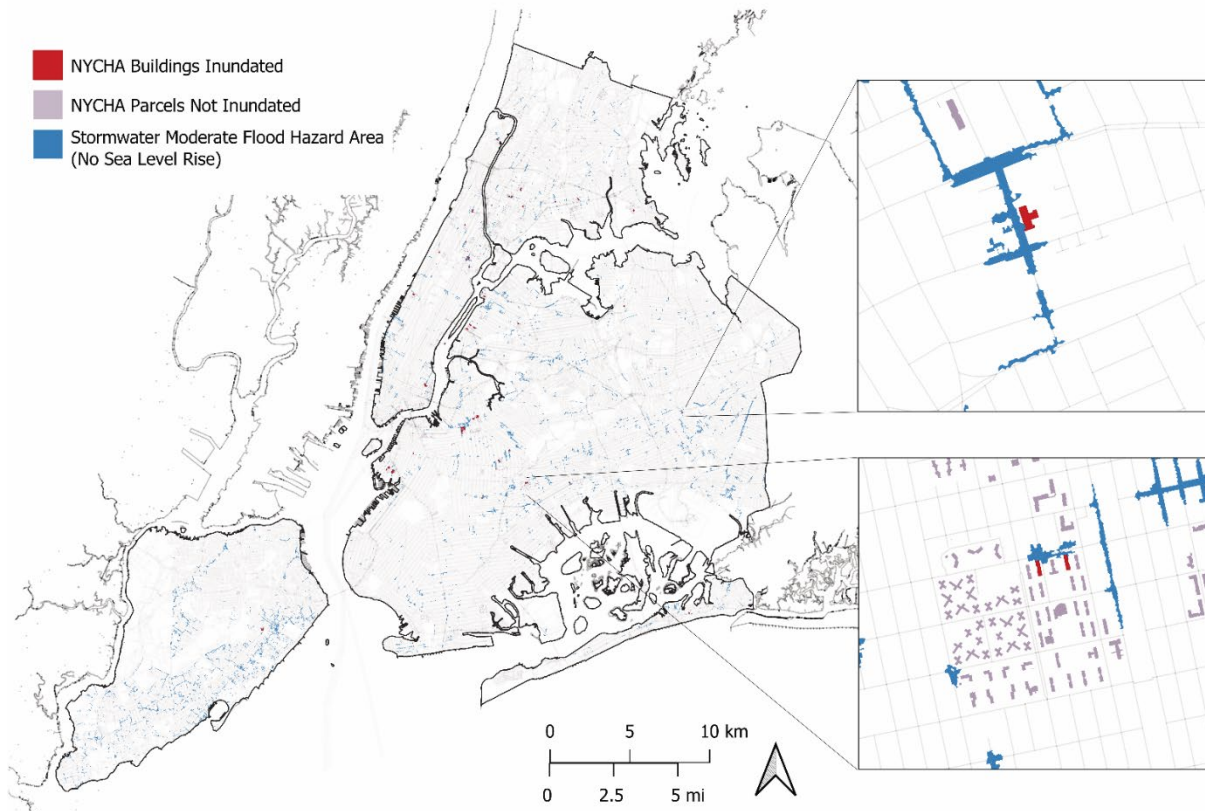


Figure 8: NYCHA developments with buildings that would be exposed to pluvial flooding from a moderately intense (~2 inches in one hour) rain event. NYCHA buildings represent less than 1% of the total buildings inundated under this scenario. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

To estimate the number of buildings exposed to the Moderate pluvial flood scenario, we identified all buildings located within a 1 ft buffer of the simulated pluvial flood hazard area. Under this Moderate scenario 30,690 buildings would be exposed to stormwater inundation depths of greater than 4 inches. Of these exposed buildings, 16.7% (5,113) are single-story buildings and 41.7% (12,796) of the exposed buildings have basements, cellars, or subgrade spaces. Of the exposed buildings, 30.7% (9,413) are 1-2 residential unit buildings with subgrade spaces, and 0.36% (112) of the exposed buildings are part of NYCHA developments (Figure 8). In the interpretation of these results, it is important to note that the Stormwater Resiliency modeling assumes that ~2 inches of rain fall uniformly over the entire city. Such a scenario is unlikely to occur during an actual rain event.

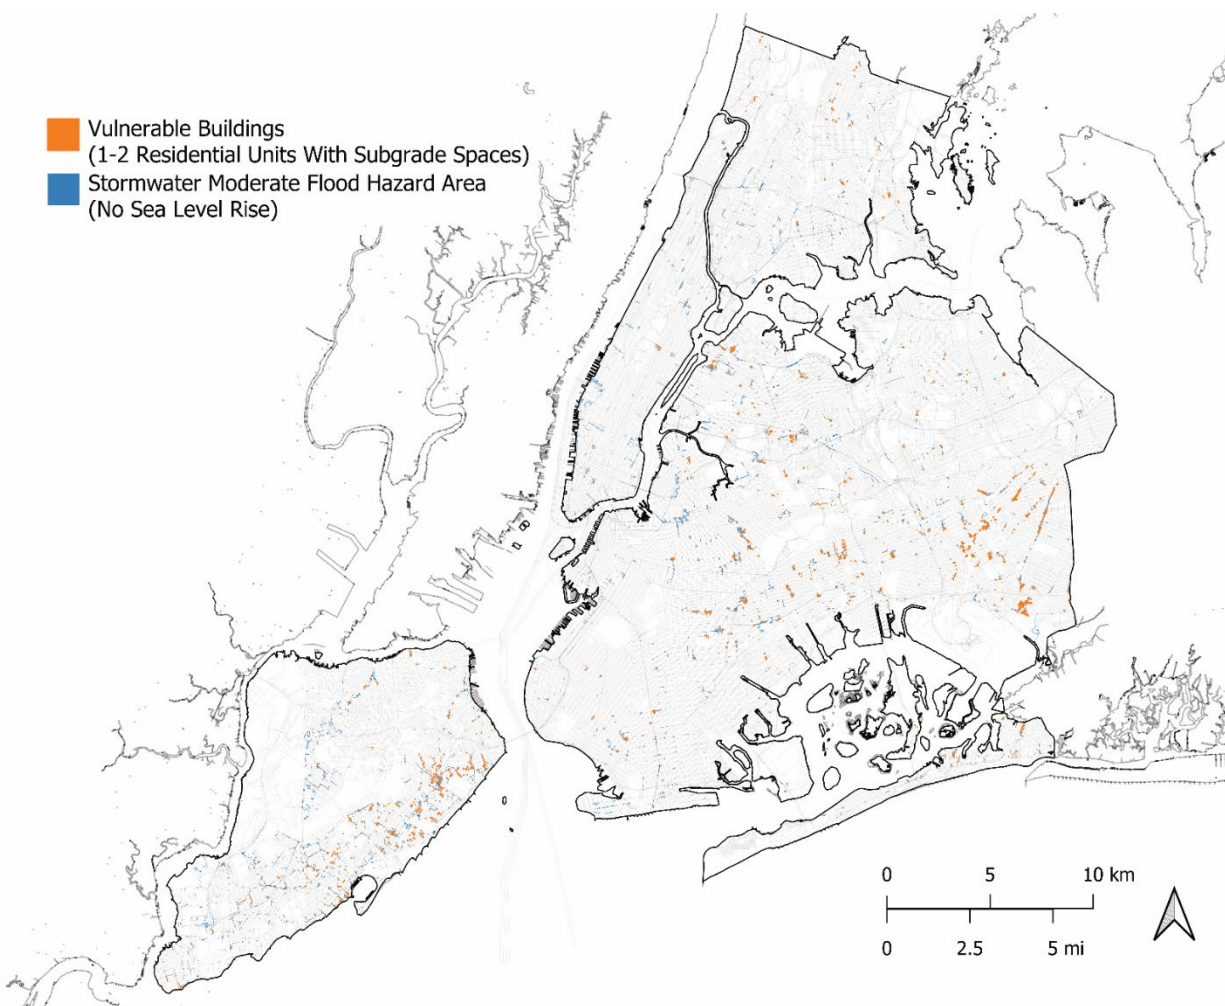


Figure 9: 1-2 family residential buildings with basements that would be exposed to pluvial flooding from a moderately intense (~2 inches in one hour) rain event. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

#### 4.4 Climate Change and Future Pluvial Flooding

Pluvial flooding is already a significant hazard for NYC, and it will be exacerbated by human-caused climate change throughout the 21st century, especially if global efforts to reduce greenhouse gas emissions are delayed. Climate change is expected to increase the probability of extremely intense, short-duration precipitation (Fowler, Lenderink, et al., 2021; Westra et al., 2014). Table 4 presents projected changes in the 10 yr (10% AEP) and 100 yr (1% AEP) precipitation accumulation falling in 1 hour. The relatively moderate (10 yr) cloudbursts that already cause pluvial flooding in some inland areas of the city (Figure 9) are projected to become 19 – 24% more intense. Greater potential increases are projected for more extreme (100 yr) storms, with 1-hour accumulations increasing by 20%, even if global emissions of heat trapping gases are reduced by mid-century, and by 30% under scenarios of unmitigated climate change. There is greater scientific uncertainty associated with these short-duration precipitation projections, compared with projections of future daily rainfall extremes (Fowler, Ali, Allan, Ban, Barbero, Berg, Blenkinsop, Cabi, Chan, & Dale, 2021). This consistent uncertainty presents a significant challenge for the design of stormwater infrastructure for pluvial flood resilience (L. M. Cook et al., 2020).

Table 4: 60-minute rainfall accumulation in inches at selected AEPs (return intervals). Contemporary precipitation values are from NOAA Atlas 14 at the Central Park Weather Station. Future precipitation projections are based on the mean citywide delta change factors derived from an ensemble of climate models using the LOCA2 downscaling method for SSP245 (mid-century greenhouse emissions reduction) and SSP585 (unmitigated climate change). Values in parentheses represent the 10<sup>th</sup> and 90<sup>th</sup> percentile values at Central Park, and their projections based on the citywide mean change factor.

	2 Yr (50% AEP)	10 Yr (10% AEP)	50 Yr (2% AEP)	100 Yr (1% AEP)
<b>Contemporary: NOAA Atlas 14</b>	<b>1.28</b> (1.04-1.58)	<b>1.89</b> (1.52-2.36)	<b>2.57</b> (1.93-3.41)	<b>2.87</b> (2.08-3.95)
<b>SSP245 (2050s- 2090s)</b>	<b>1.56</b> (1.27-1.93)	<b>2.43</b> (1.95-3.02)	<b>3.19</b> (2.39-4.23)	<b>3.62</b> (2.62-4.98)
<b>SSP585 (2050s- 2090s)</b>	<b>1.64</b> (1.33-2.02)	<b>2.55</b> (2.05-3.19)	<b>3.34</b> (2.51-4.43)	<b>3.73</b> (2.7-5.14)

Along with projected increases in rainfall rates at any given location, recent studies have identified mechanisms that can result in increases in the areal extent over which intense rain falls with global warming (Y. Chen et al., 2021; Fowler, Lenderink, et al., 2021; Pendergrass, 2020). Most cloudbursts are highly localized and result in flooding only in small areas of the city at once, though these localized impacts can be severe and associated with life-threatening conditions in affected communities (B. R. Rosenzweig, McPhillips, et al., 2018). However, two of the most impactful historic pluvial flood events at the city-scale – the Ida Remnants Cloudburst and a cloudburst on August 8, 2007 that caused the unplanned shutdown of much of the subway system – were associated with organized systems of thunderstorms that resulted in extreme rainfall rates falling over widespread areas of the city (MTA, 2007; Smith et al., 2023). A potential increase in the size and organization of future cloudbursts would have significant implications for the citywide impacts of pluvial flood events (Peleg et al., 2022), but scientific understanding of this topic remains in the earliest stages.

Pluvial flooding may also be exacerbated in areas where groundwater tables rise in response to sea level rise (Section 7.4). In these areas, the ability for storm sewers to convey stormwater may be reduced by increased infiltration of groundwater into sewers (Liu et al., 2018; B. R. Rosenzweig, McPhillips, et al., 2018), leading to hydrologic overload (see above). Stormwater green infrastructure that utilizes infiltration may also be less effective as rising water tables reduce the volume of available unsaturated subsurface (K. Zhang & Chui, 2019).

Figure 10 presents the area that would be inundated greater than 4 inches under the Stormwater Resiliency Study Extreme Scenario. In this scenario, 206,859 of currently existing buildings would be exposed to pluvial flooding. For comparison, 88,700 buildings were in the area inundated by Post-Tropical Cyclone Sandy of 2012 (City of New York Office of the Mayor, 2013). However, as discussed previously, it is important to note that the Stormwater Resiliency modeling assumes that rainfall is uniform across the entire city, meaning this figure represents the ceiling of exposed buildings for a rainfall of this magnitude. A total of 32,918 (16%) of the buildings exposed in such a scenario are single-story buildings and nearly half (93,528; 45.6%) of these exposed buildings have subgrade spaces. The overwhelming majority (70,970) of the exposed buildings with subgrade spaces are 1-2 residential unit buildings (Figure 9). 897 (0.43%) of the exposed buildings are part of NYCHA developments, which are highlighted in Figure 10.



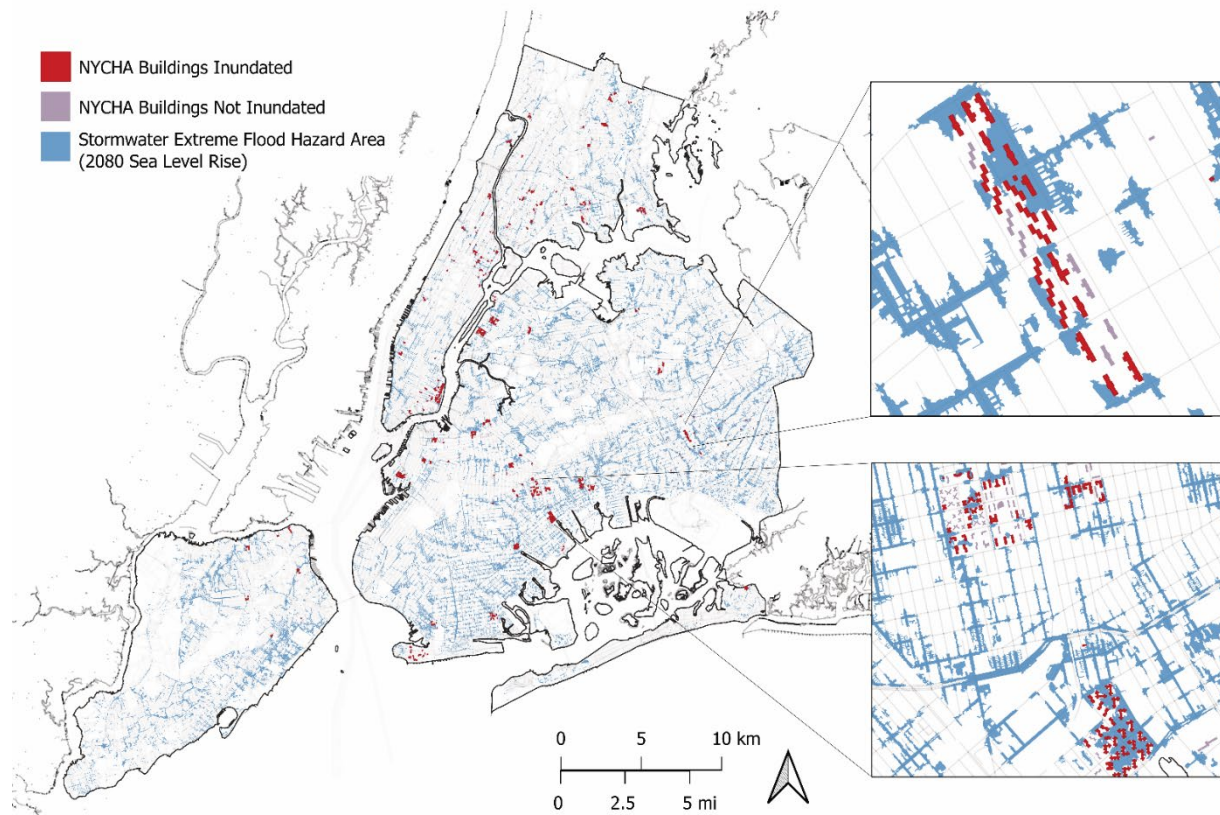


Figure 10: NYCHA developments that would be exposed to pluvial flooding during an extreme rain event (~3.5 inches per hour) with 58 inches of sea level rise, as modeled for the Stormwater Resiliency Plan (City of New York Mayor's Office of Resiliency, 2021). The inundated NYCHA buildings represent less than 1% of the total buildings inundated under this scenario, but nearly a third (30.1%) of NYCHA affordable public housing buildings. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

#### 4.5 Persistent Knowledge Gaps: Pluvial Flooding

Along with remaining scientific uncertainty on future short-duration precipitation, there remain critical knowledge gaps that limit our understanding of how future precipitation intensification with climate change will impact flood risk:

**Monitoring of the hydrologic and hydraulic response and impacts of cloudbursts:** There is currently very limited direct observational data on the hydrologic and hydraulic response to cloudbursts. Following the Ida-Remnants Cloudburst, the US Geological Survey mapped inundation depths by surveying high-water marks in several severely impacted communities in New York City (Figure 7), but observational data on flooding in response to extreme rain remain very limited. The collection of direct, in-situ monitoring of street flooding is being piloted through the NYC FloodNet project (Silverman et al., 2022) (discussed in Section 10, but a sustained monitoring network of flooding depths, in-sewer water depths and flow rates, and in-situ rainfall rates is needed to understand the hydrologic and hydraulic response to extreme rain in NYC. There may also be opportunities to develop methods to assimilate existing monitoring data that is collected for other purposes, such as traffic cameras.

**Hazard Mapping:** The pluvial flood hazard maps developed through the Stormwater Resiliency Study (City of New York Mayor's Office of Resiliency, 2021) provide novel and critical information to support flood risk assessment. However, currently available maps only represent a very small selection of potential precipitation scenarios, and these maps are only able to identify areas where inundation exceeds depth thresholds (4 inches or 1 foot) at some point during the flood event. Additional hazard maps that represent a broader range of plausible cloudburst scenarios and provide information on flood rise time, fast-flowing water, exposure to toxic chemicals and pathogens, and inundation duration are needed to support emergency response and flood management planning, and climate adaptation. The development of these additional hazard layers remains limited by the computational resources needed for this type of modeling and the limited availability of observational data on flooding in NYC, also described further in Section 10.

**Pluvial Flood Vulnerability:** As described in Section 3.4.1, the true costs of pluvial flooding to NYC residents remain poorly characterized. Additional work is needed to improve understanding of who is impacted by pluvial floods, in which ways, and incurring what tangible and intangible costs.

## 5 Fluvial Flooding

### 5.1 Fluvial Flood Hazard Characterization

Fluvial flood risks (also referred to as riverine flood risks) are caused when the stage of a river, creek, or stream exceeds the elevation of its banks. NYC's inland areas were historically drained by a dense network of streams, nearly all of which were filled, with their flow redirected to subterranean stormwater sewers by the mid-20th century (Figure 1). Remaining freshwater stream channels include the Bronx River, Valley Stream (which flows along the eastern edge of the city and is the head of Jamaica Bay), and small inland creeks in Staten Island. These streams provide critical freshwater habitat within the city but can cause flooding when their water levels rise above bankfull stage (e.g. the water level in a creek or stream at which flooding of the banks begins to occur) during both cloudbursts and longer duration rain events. Fluvial flood risks within the city are mapped in the Special Flood Hazard Area (100-year floodplain) maps provided by FEMA, along with coastal flood hazards (FEMA, 2007, 2013).

Fluvial flooding can be monitored directly using stream gauges, which provide in-situ measurements of stream water levels. Bankfull water levels are associated with inundation of the adjacent floodplain and can cause minimal societal impacts (if the floodplain is undeveloped) to moderate/major impacts if buildings, infrastructure, or other assets are located there. NPCC3 presented an assessment of fluvial flooding in regional streams outside the border of NYC with long-term gauge record. Additional research is needed to characterize fluvial flood risks within the city, especially in areas of the Bronx, Queens, and Staten Island.

### 5.2 Historical Example: Ida-Remnants Cloudburst Fluvial Flooding

At the time of writing, the only active stream gauge located within NYC is along the Bronx River at New York Botanical Garden, which provides observations from 2007– present. (USGS, 2016a) Over this period, 24 minor floods, 7 moderate flood events, and 7 major floods (Table 5) were observed through 2022 at this site (Figure 11). In addition, a flood on July 19, 2022 damaged the stream gauge such that the peak flood stage could not be recorded.

*Table 5: Historic major flood events (stage above 4ft) observed at the Bronx River Stream Gauge at NY Botanical Garden (2007-2023): SOURCE: USGS Bronx River Stream Gauge (2024)*

Rank	Dates	Peak Stage	Description
1	4/16/2007	6.05 ft (03:00 EDT on April 16, 2007)	Heavy rains from a Nor'Easter (A storm total rainfall of 8.41 inches was observed at Central Park (Storm Events Database Episode 5088 (NCEI, 2007))
2	9/1-2/2021	5.59 ft. (8:45am EDT on September 2, 2021)	Cloudburst associated with the remnants of Hurricane Ida (Described in Section 4.2)
3	8/27-28/2011	5.18 ft (8:15pm EDT on August 28, 2011)	Tropical Storm Irene (Described in Section 8.2)
4	3/11/2011	4.34 ft (12:15pm EDT on March 11, 2011)	Fronts associated with a slow-moving low-pressure system west of the city brought heavy rain (FXUS61 KOKX 110400 AFDOKX (NWS, 2011))
5	4/16/2018	4.24 ft (5:00pm EDT on April 16, 2018)	Heavy rainfall from a slow-moving warm front. Most rain occurred within a 3-4 hour period (Storm Events Database Episode 125008 (NCEI, 2018a))
6	9/25/2018	4.16 ft. (9:30pm EDT on September 25, 2018)	Heavy rainfall preceding a slow-moving warm front (Storm Events Database Episode 131100 (NCEI, 2018b))
7	4/17/2011	4.06 ft (5:45am EDT on April 17, 2011)	A cold front associated with a low-pressure system brought heavy rain (FXUS61 KOKX 170000 AFDOKX (NWS, 2011))

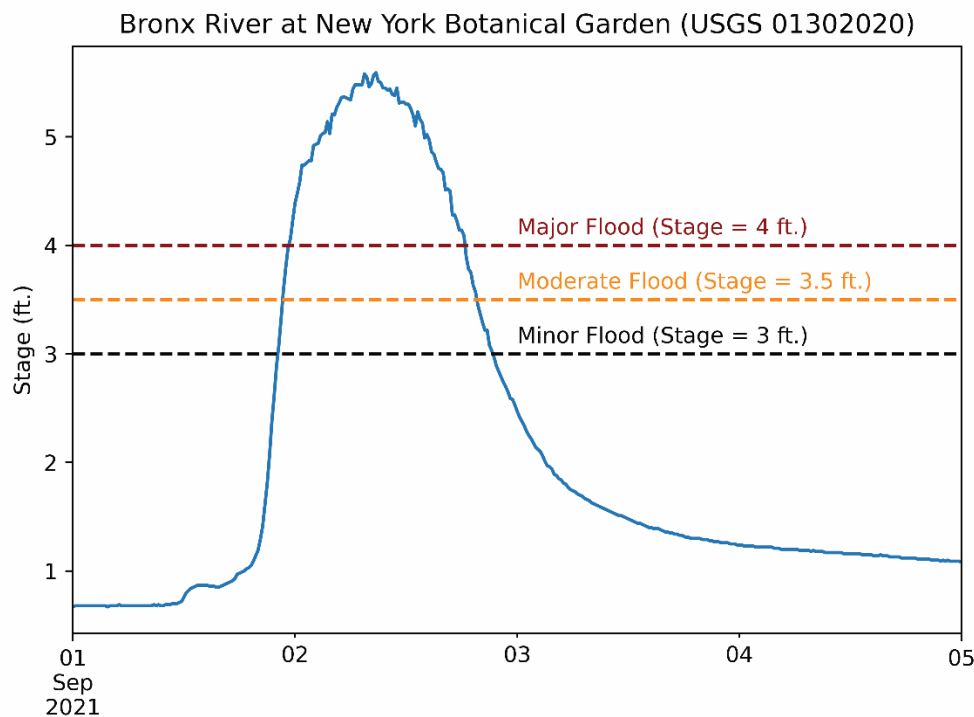


Figure 11: Stream stage in the Bronx River during the Ida-remnants cloudburst. The river remained above major flood stage for over 18 hours (from 11:30pm EDT on 9/1/2021 through 6:15pm EDT on 9/2/2021) SOURCE: Bronx River at NY Botanical Garden Stream Gauge (2024). Graphic by B.R. Rosenzweig

### 5.3 Fluvial Flooding Exposure and Vulnerability

#### 5.3.1 Buildings and critical infrastructure exposed to fluvial flooding

Exposure to fluvial flooding was evaluated utilizing areas delineated in the FEMA SFHA that are adjacent to remaining inland water bodies. The FEMA SFHA excludes areas that would be flooded with depths less than 1 foot (0.3m), even though such shallow flooding could result in inundation of ground-floor and subgrade spaces. Based on this available hazard data, only 388 buildings are in areas that have a 1% AEP (100-year return interval) of flooding from inland streams and rivers (Figure 12). Of these buildings, 32.4% (126) are single-story buildings and 28.6% (111) of the total exposed buildings have identified subgrade spaces, which is somewhat lower than the percentage of buildings with subgrade spaces across the city. A total of 25.5% of the exposed buildings are 1-2 unit residential units with subgrade spaces. No NYCHA buildings are located in this inland fluvial hazard area.

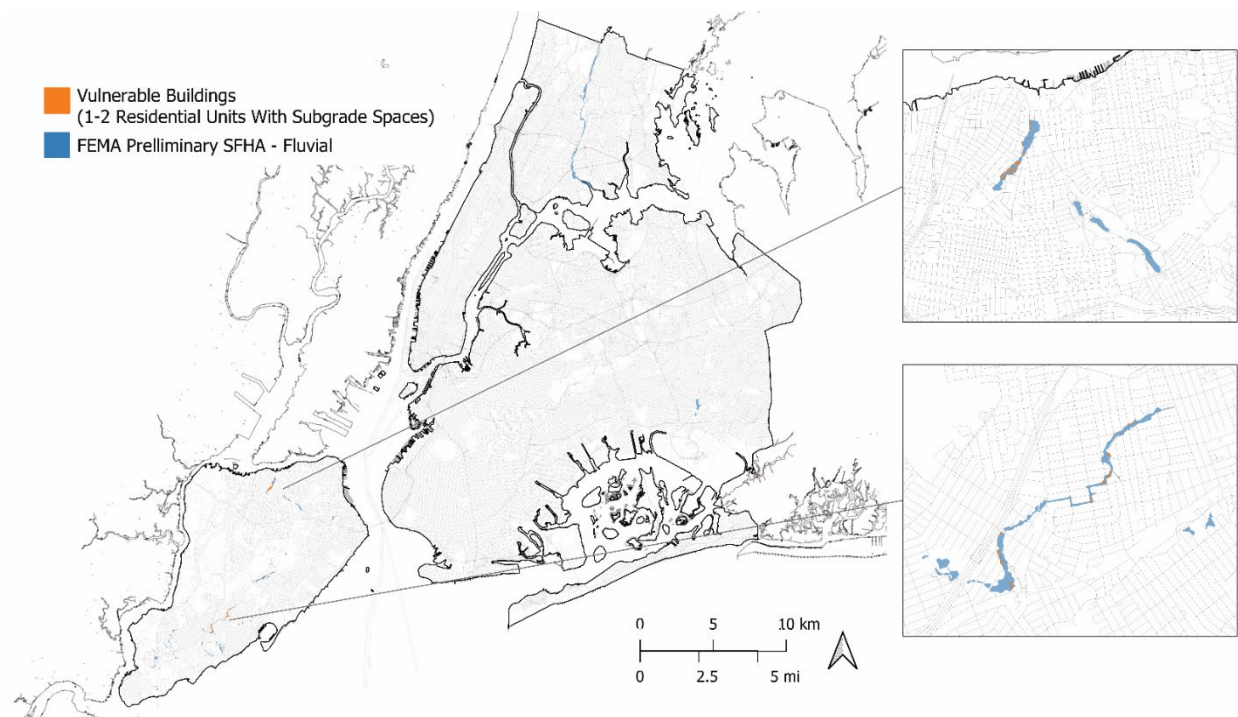


Figure 12: 1-2 family residential buildings with basements in areas of the city that would be exposed to fluvial flooding during a storm with a 100-year return interval (1% annual probability). As a result of the historic filling of most of NYC's natural streams, exposure to fluvial flooding has largely been replaced by exposure to pluvial flooding and is now limited compared to other types of flooding. However, areas adjacent to the Bronx River and small surface streams in Staten Island remain exposed. Source: Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

## 5.4 Climate Change and Future Fluvial Flooding

As with pluvial flooding (Section 4.4), the projected amplification of precipitation with climate change will increase the frequency and magnitude of fluvial floods in the future. Fluvial flooding will also be exacerbated by sea level rise since NYC's rivers and streams are tidal and drain to the harbor. Rising seas will impede this drainage and may increase groundwater levels and, in turn, stream baseflow, resulting in an increased frequency of stages that exceed flood thresholds (Habel et al., 2020; Moftakhari et al., 2017). FEMA Flood Insurance Studies do not consider changing precipitation patterns or groundwater levels with climate change and do not represent the increased fluvial flood hazard that will result from unmitigated climate change.

## 5.5 Persistent Knowledge Gaps: Fluvial Flooding

Our understanding of NYC's fluvial flood risk and potential future changes is limited by the same gaps in short-duration precipitation data discussed for pluvial flooding (Section 4.5). In addition, most of the residences exposed to fluvial flooding are in the flood hazard area of streams in Staten Island that are currently ungauged. The reactivation or installation of stream gauges along these high-exposure streams would support enhanced characterization of fluvial flood risk and the development of optimized strategies for fluvial flood resilience. As discussed in the section on pluvial flooding, an estimate of the annual cost of damages due to fluvial flooding on NYC residents is currently not available. However, since the chances of residents of floodplains having FEMA flood insurance are higher, estimates based on FEMA claims may be better estimates than for other flood hazard types.

# 6 Coastal Flooding

## 6.1 Coastal Flood Hazard Characterization

With 520 miles of shoreline (City of New York Department of City Planning, 2021), NYC is exposed to severe coastal flooding resulting from high tides and storm surge, as demonstrated during Post Tropical Cyclone Sandy in 2012. Severe coastal floods are caused by two types of storms, predominantly tropical cyclones in warm seasons (June through October) and extratropical cyclones in cooler seasons (November through May)(Colle et al., 2010; P. M.



Orton et al., 2016). Major factors influencing the occurrence of severe coastal floods include the timing of the wind- and pressure-driven storm surge relative to high tide (Kemp & Horton, 2013), and amplification of storm surges due to winds that blow into the concave coastline of the New York Bight (Gurumurthy et al., 2019). Chronic high-tide flooding is also a problem for some NYC neighborhoods, due to sea level rise, dredging, and landfilling of wetlands (Pareja-Roman et al., 2023). Present-day coastal flooding for monthly high tides were mapped for NYC by NPCC3 and include some localized areas around Jamaica Bay. (P. Orton et al., 2019a) Coastal extreme floods are mapped in the Special Flood Hazard Area maps provided by FEMA, which represent coastal or fluvial flood hazards only (FEMA, 2007, 2013).

## 6.2 Historical Example: Coastal Flooding on December 23, 2022

Extreme historical events such as Sandy and the 1821 Category 3 hurricane that struck NYC, with storm tides of 11.1 and 9.8 ft (relative to the year's mean sea level) at the Battery, respectively, have been a focus of widespread research in recent years (Brandon et al., 2014; P. M. Orton et al., 2016; Strauss et al., 2021). However, National Weather Service (NWS) designated "major floods" (Table 5) from less extreme storms have a factor of 10-20 higher annual probability of occurrence than these two historical extreme events today and even higher in future decades. See water-level return period curves in Orton et al. (P. M. Orton et al., 2016). Below, we highlight a recent major flood to raise awareness of these far more common but nevertheless dangerous and damaging events.

In December 2022, a powerful, inland extratropical cyclone located over the Great Lakes Region caused winter storm impacts across the Midwest and northeastern United States. Although the storm was located hundreds of miles west of NYC, it generated powerful southeasterly winds that generated a storm surge along the coast. Early on the morning of December 23<sup>rd</sup>, a moderate 3-foot storm surge peaked simultaneously with one of the year's highest tides to cause substantial flooding around NYC. Water levels across most of the city exceeded the moderate flood threshold of the NWS (see Figure 13), with those at the Battery peaking at 5.9 feet NAVD88, which is an approximately 3-year return period event. Water levels in Jamaica Bay (Figure 14), however, exceeded NWS major flood thresholds there and peaked at 6.7 feet above NAVD88 (Inwood, USGS gauge; Figure 13) (USGS, 2016b) which is an 8-year return period water level (P. M. Orton, Sanderson, et al., 2020) and the second highest in the bay's 20-year data record, behind (but ~3.9 feet below) Post-Tropical Cyclone Sandy. The likely cause of Jamaica Bay's high peak water levels relative to those elsewhere around NYC was local tide amplification which has raised perigean-spring ("king") high tides by about 0.7 feet, due to a combination of historical dredging and urban development of wetlands surrounding the bay (Pareja-Roman et al., 2023). Flood depths in some areas surrounding Jamaica Bay were observed by FloodNet sensors to be about 3 feet, whereas only shallow nuisance flooding was observed in the harbor areas (typically well below 1 ft). The relative sea level rise around NYC of ~1.3 feet since 1900 was also clearly a contributor to these water elevations and flood depths.

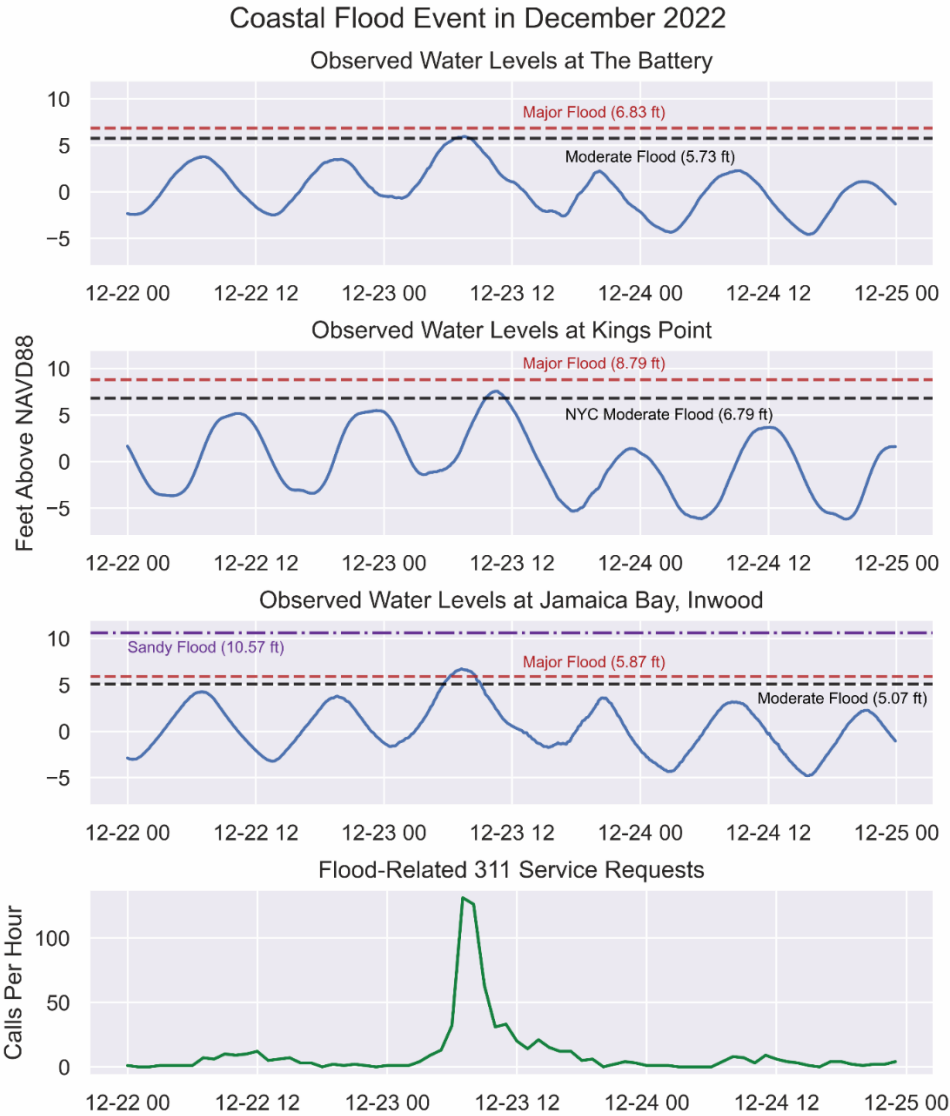


Figure 13: Observed water levels and 311 service requests related to flooding (bottom panel) around NYC from December 22-24, 2022. Tide gauge locations are provided in Figure 14. National Weather Service flood thresholds and Post Tropical Cyclone Sandy are shown as horizontal lines for comparison. Figure by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

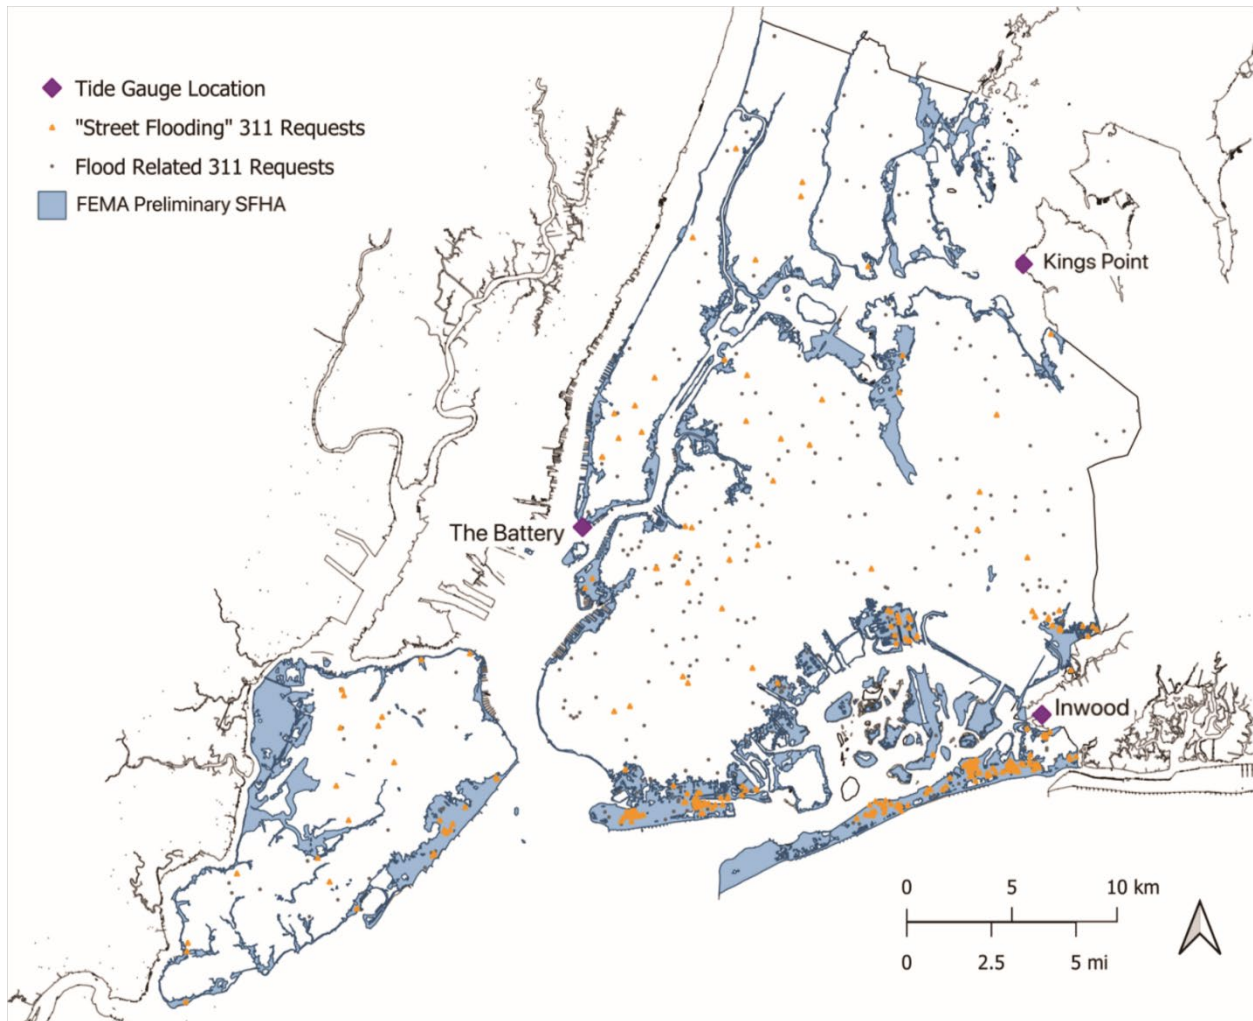


Figure 14: Street flooding and flood-related 311 service requests in NYC on December 23, 2022. Along with 'Street Flooding', flood-related service requests include: 'Sewer Backup', 'Highway Flooding', 'Manhole Overflow', 'Possible Water Main Break', 'Catch Basin Clogged/Flooding', and 'Excessive Water in Basement'. During this event, street flooding requests are concentrated in coastal areas, particularly along Jamaica Bay. Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College.

### 6.3 Coastal Flooding Exposure and Vulnerability

Based on FEMA's last completed Flood Insurance Study (FIS) (FEMA, 2013) 67,255 buildings are located in coastal areas that have a 100 yr return interval (1% AEP) of flooding in the contemporary climate. About 30% (20,197) of these buildings are single-story buildings and 33.1% (22,242) of the total exposed buildings have identified subgrade spaces. Of the exposed buildings, 27.0% (18,176) are 1-2 unit residential units with subgrade spaces. Figure 15 and Figure 16 illustrate the extent of this exposure to NYC's vulnerable populations by highlighting the NYCHA developments and 1-2 residential unit buildings with subgrade spaces in coastal areas threatened by inundation during a 100-year storm-surge event. Along with storm surge, coastal flooding can occur as a result of high-tide ('sunny day') flooding, which will increase with sea level rise. Figure 17 highlights vulnerable 1-2 unit residential buildings that are exposed to present-day flooding when tide levels reach the Mean Monthly High Water (MMHW) level. No NYCHA buildings are in this current hazard area. For comparison, Figures 18 and 19 present NYCHA buildings and 1-2 unit residential buildings with basements that will be exposed to approximately monthly (MMHW) tidal flooding with 58 inches (1.47m) of sea level rise (NPCC 2080 Scenario) in the absence of adaptive flood risk management efforts.

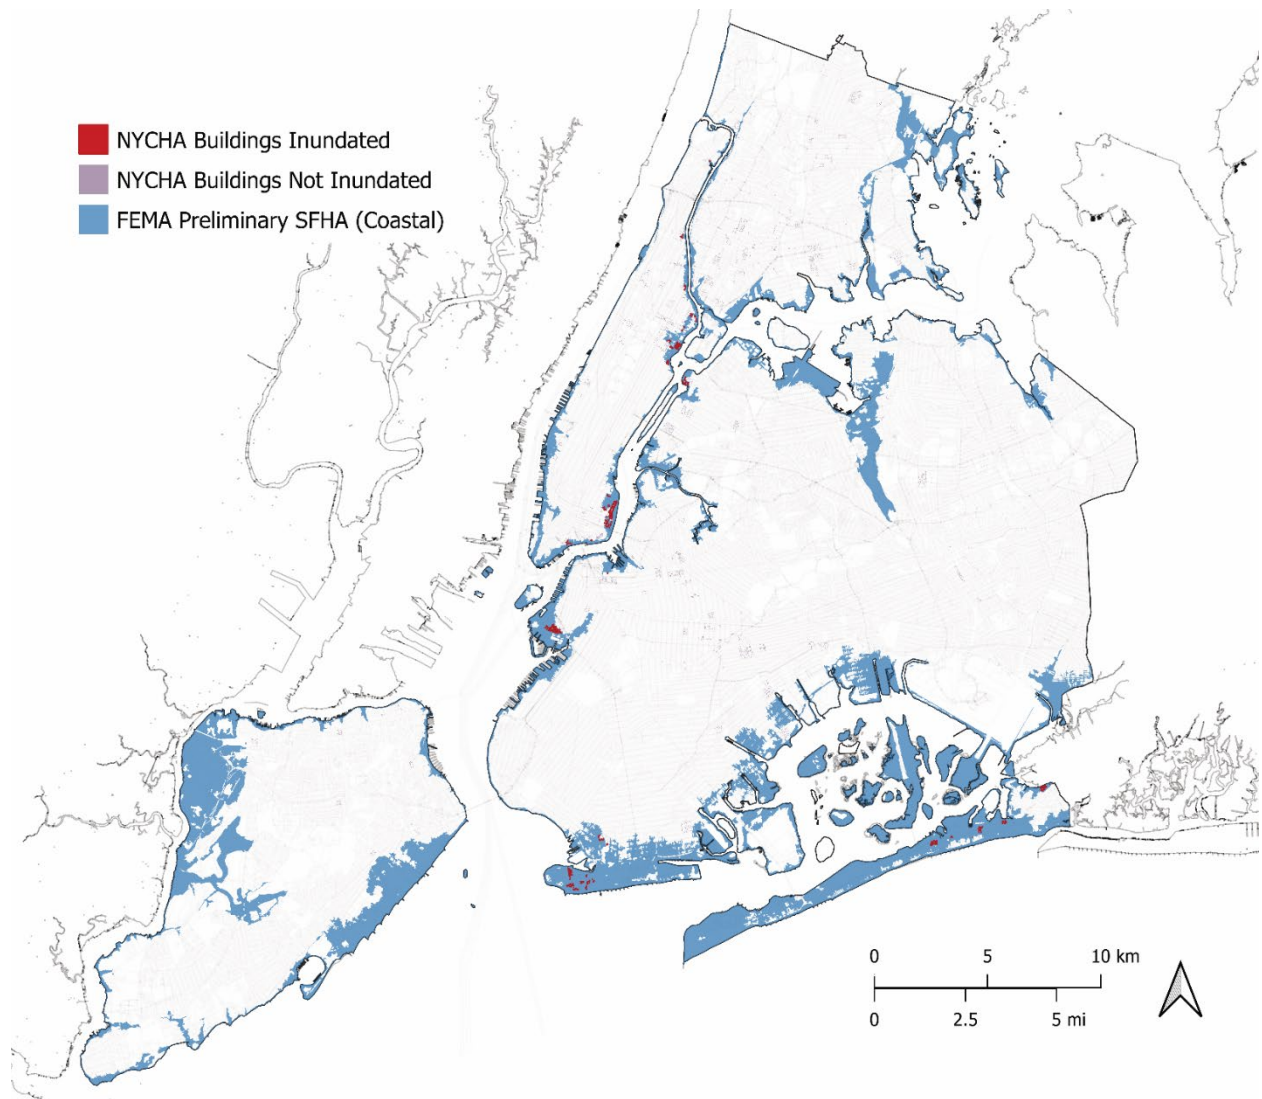


Figure 15: New York City Housing Authority (NYCHA) buildings in coastal areas exposed to 100-year (1% annual probability) storm surge flooding. Source: Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.



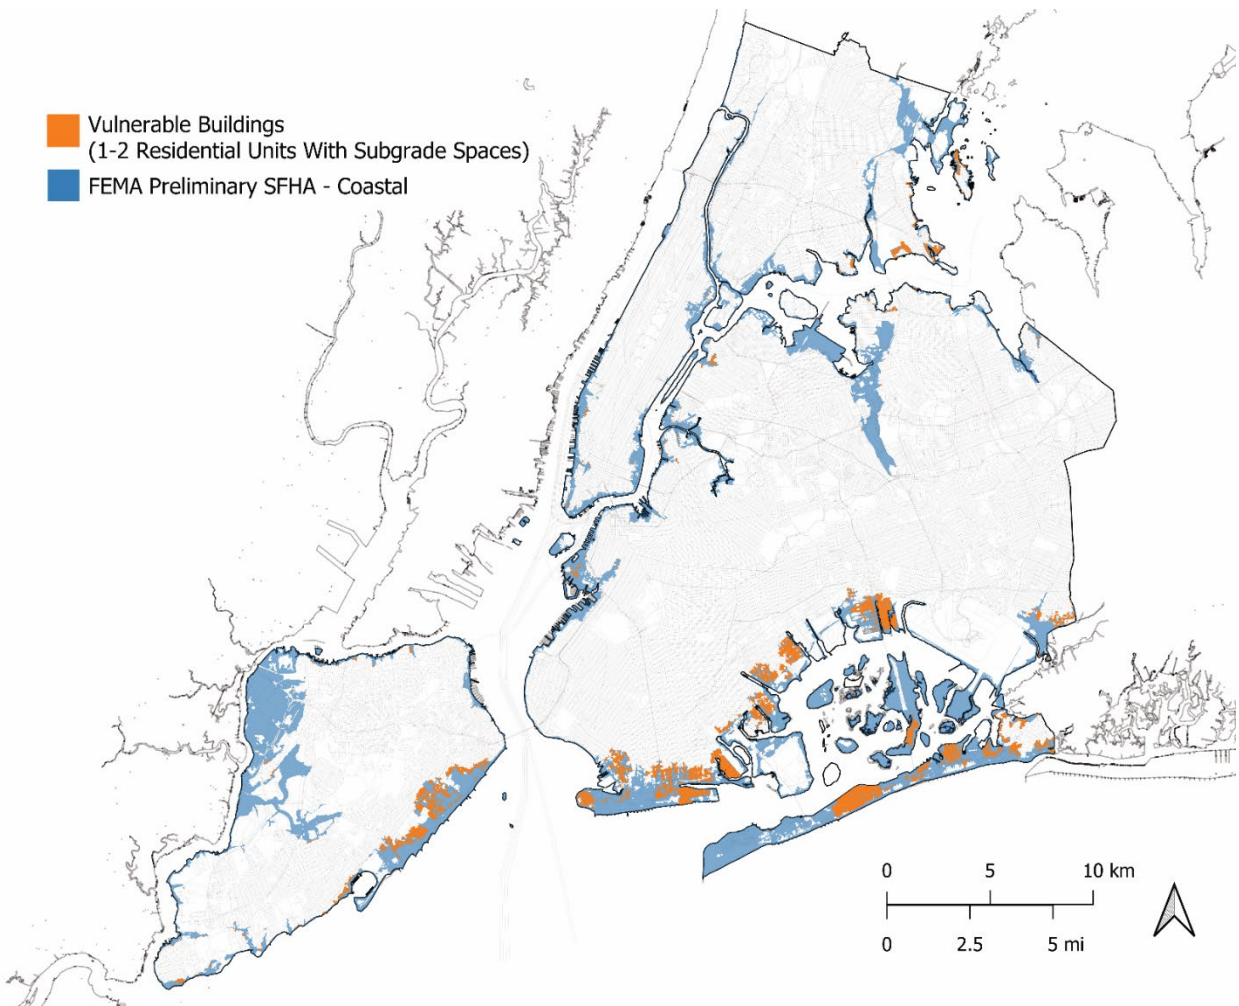


Figure 16: 1-2 residential unit buildings with basements located in the Preliminary FEMA Special Flood Hazard Area adjacent to the coast. Source: Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

Interim Report

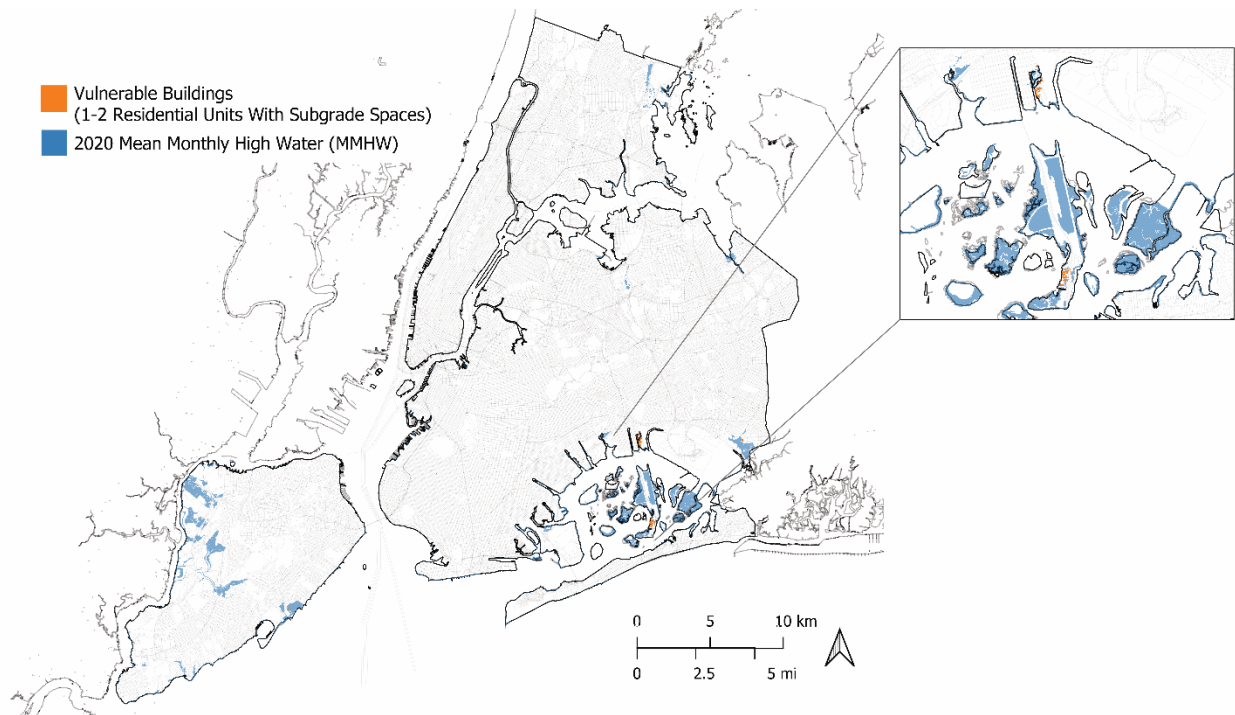


Figure 17: The Flood Vulnerability Index (FVI) 1-2 residential unit buildings with subgrade spaces in coastal areas exposed to present-day flooding from tide levels at the Mean Monthly High Water (MMHW). Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

## 6.4 Climate Change and Future Coastal Flooding

It is well-established that SLR will continue to increase the frequency and magnitude of NYC coastal floods (P. Orton et al., 2019a), but the potential role of changing storms is an area of high uncertainty and active research (Braneon et al., 2024). Present day and future coastal flood risks with sea level rise have been extensively described in previous NPCC reports. Patrick et al. (Patrick et al., 2019) and Orton et al. (P. Orton et al., 2019a) applied static and dynamic flood modeling to map coastal flood hazards, respectively. Orton et al. (P. Orton et al., 2019a) also updated the projections of future coastal flood risk considering monthly high tides and extreme storm surges across a broadened set of sea level rise projections. While there is consensus that atmospheric warming will likely intensify tropical cyclones in the future, cyclogenesis, storm frequency, and storm tracks are also likely to shift. As a result, there is considerable uncertainty and spatial variability in projections of future changes to storm surge and it remains an active research area that has not yet been incorporated into NPCC flood maps.

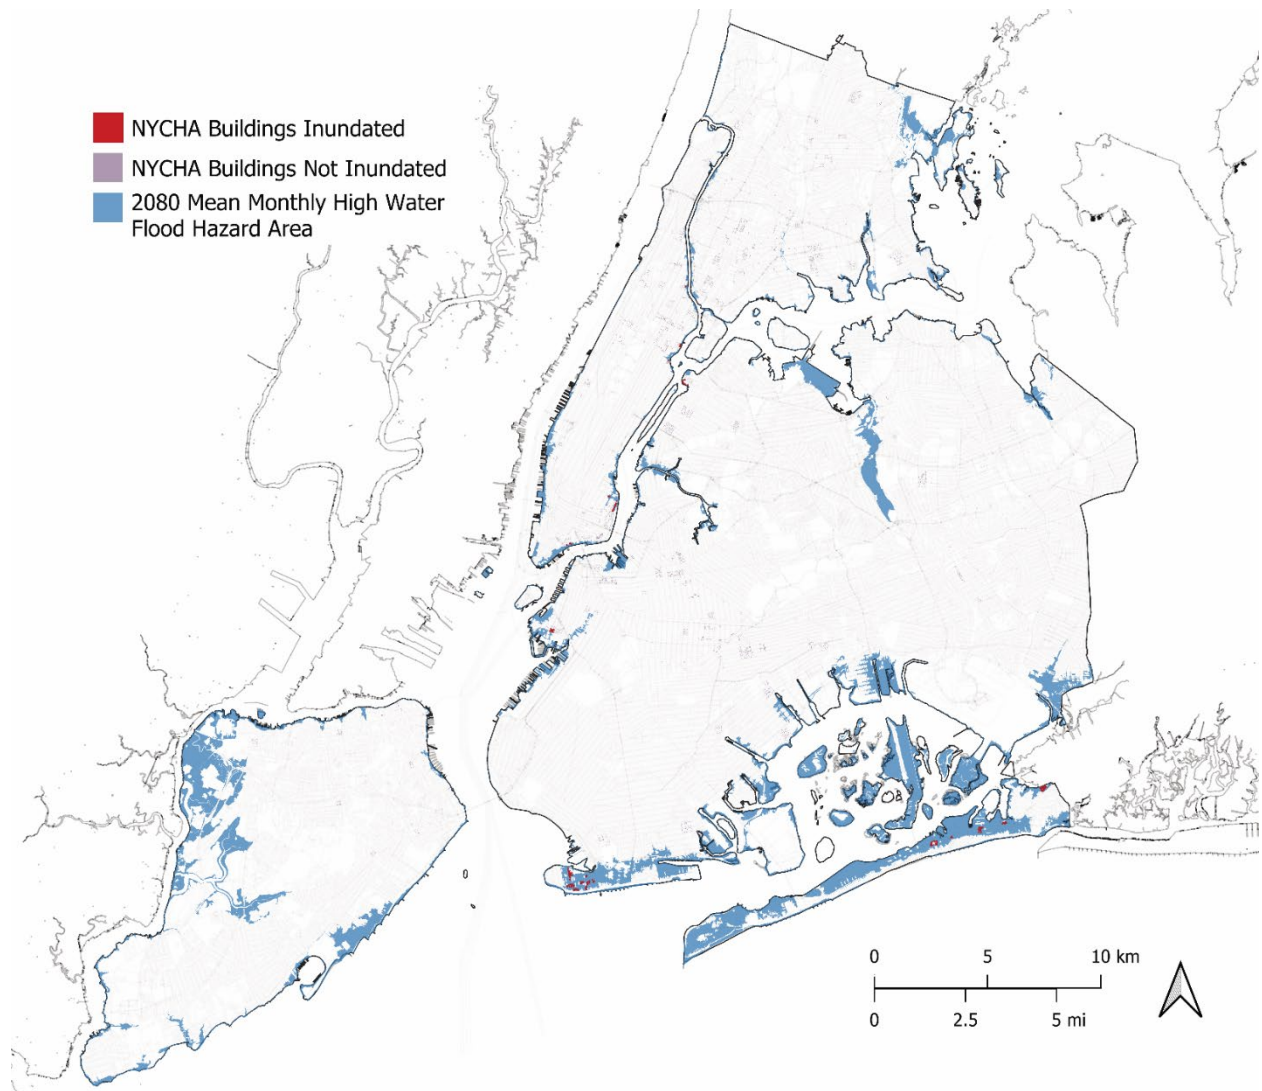


Figure 18: New York City Housing Authority (NYCHA) buildings in coastal areas that are projected to be exposed to flooding from the Mean Monthly High Water (MMHW) with 58 inches (1.47m) of sea level rise (NPCC3 2080 Scenario). Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

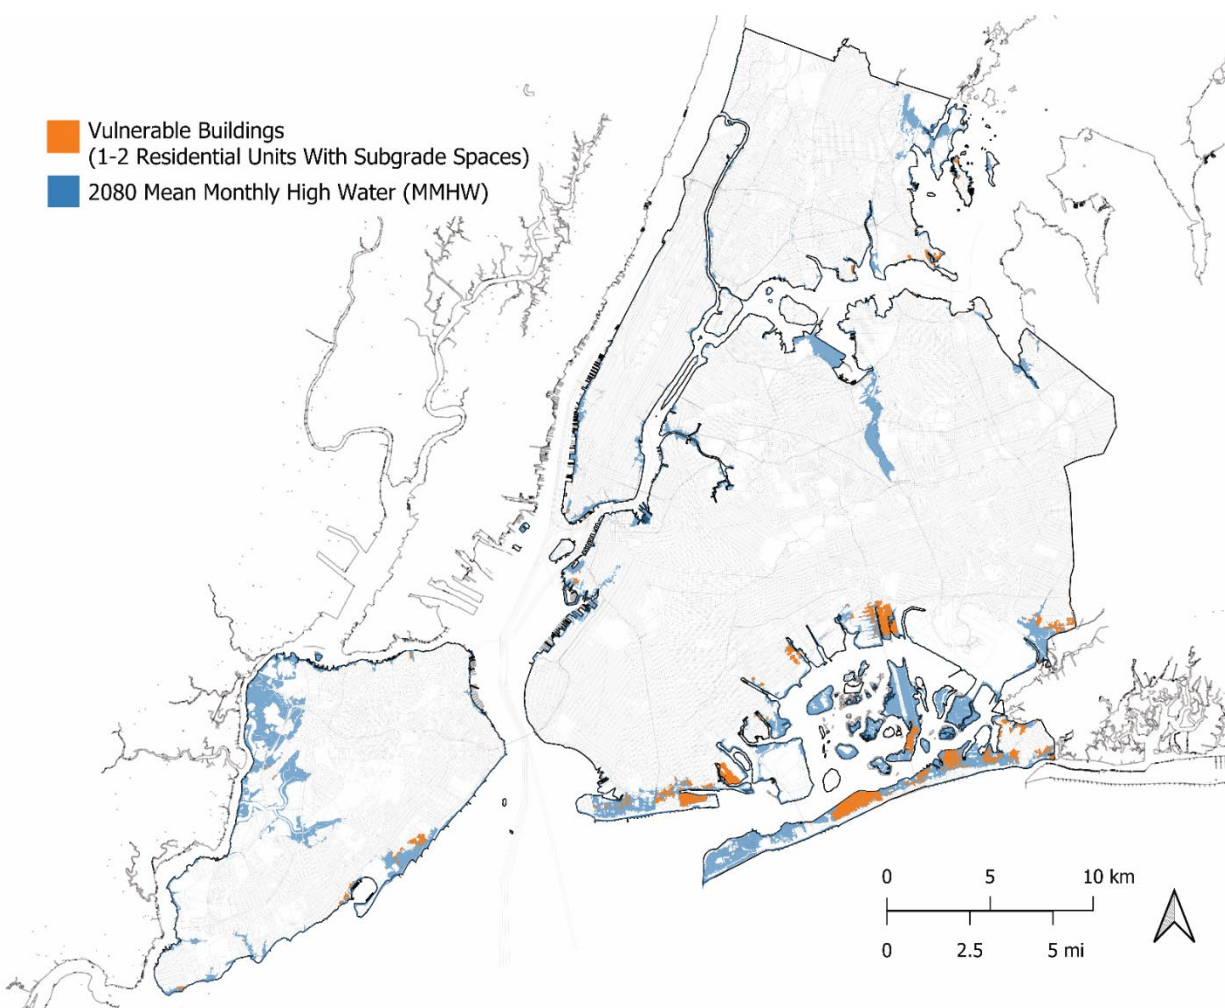


Figure 19: 1-2 residential unit buildings with subgrade spaces in coastal areas that are projected to be exposed to flooding from the Mean Monthly High Water (MMHW) with 58 inches (1.47m) of sea level rise (NPCC3 2080 Scenario). Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

## 6.5 Persistent Knowledge gaps

There continues to be a need for deeper research into coastal storms, storm surges and climate change impacts in the NYC region. There remain persistent cross-study differences in estimates of present-day storm tide hazards (Cialone et al., 2015; Nadal-Caraballo et al., 2015; P. M. Orton et al., 2016), as well as future changes to hurricane-driven storm surge. Hybrid storms like Sandy are poorly understood, as are the influences of climate change on such storms. These have all previously been noted as key uncertainties (P. Orton et al., 2019a).

Secondary or periodic maxima in non-tidal anomalies after a storm surge event have been referred to under the general term of “resurgences” or “edge waves” (Munk et al., 1956) but are relatively poorly understood. What is known is that these resurgences cause extremely rapid drawdowns of water levels on the tail end of a storm surge event, then a resurgence of as much as 3.5 feet in water levels that can cause flooding about 7-8 hours later if it coincides with high tide (Ayyad et al., 2022; Munk et al., 1956). A broader concern is that a storm could cause an initial surge followed by a surprising resurgence into highly populated neighborhoods. Research is needed to assess the associated risk from such events, including flood modeling of extreme historical and potential future cases of resurgence.

Post Tropical Cyclone Sandy’s flooding predominantly affected New York Harbor (southern and western areas of NYC), and the coincidence of peak storm surge with low tide spared areas of South Bronx and Northern Queens from more severe flooding (P. M. Orton, Conticello, et al., 2020). Extreme storm surges and flooding can affect these areas of NYC when hurricanes cross Long Island, causing extreme east winds and storm surges funneling down



Long Island Sound and into the East River, the relatively narrow but potentially important connection between Long Island Sound and New York Harbor. For example, the 1938 “Long Island Express” Hurricane set the historical record for water level in the upper East River (at Willets and Kings Points). Hurricane and extratropical cyclone coastal flood prediction models run by NOAA (National Oceanic and Atmospheric Administration (NOAA), 2023) have poor resolution in the East River. The hydrodynamic model applied in the last FEMA study and now again in a current study showed its worst performance and widespread low-biased water levels for this storm event in the East River (FEMA, 2013). Potential deficiencies in modeling the East River may be undermining our understanding of coastal flood risk, as well as forecasting and emergency management, and should be further investigated.

In the post-Sandy period, many adaptation policies and strategies have been put into operation. Studies to evaluate these strategies are ongoing, and the city has incorporated lessons learned from their experiences with Sandy in guidance for future coastal FRM projects (City of New York Mayor’s Office of Climate Resiliency, 2021). But more research is needed to fully document lessons learned ten years after Sandy, listing benefits and limits of coastal flood adaptation strategies that were adopted in response to that event.

## 7 Groundwater Flooding

### 7.1 Groundwater Flood Hazard Characterization

Groundwater flooding occurs when the elevation of the water table – a surface that can be used to represent the level at which the subsurface is saturated with water – is higher than that of the land surface or subterranean infrastructure, resulting in the inflow and/or infiltration of groundwater into these spaces (Habel et al., 2020; Macdonald et al., 2012). Groundwater flooding can occur in the absence of human activities, during very wet seasons or years when recharge rates greatly exceed evapotranspiration, resulting in a rise in the water table that inundates areas that are typically dry. But groundwater flooding has also become a globally-significant issue for cities that transition from the use of groundwater supply to other sources (Coda et al., 2019; Foster, 2020). As the water table rebounds from the lowered level induced by historical groundwater pumping, land areas that had previously been dry could more frequently become wet or waterlogged.

The elevation of the water table is determined by the interaction of weather and climate, human water management activities, local topography, and subsurface hydrogeology. The subsurface structure of NYC is complex and varies across the city (NYC MOS, 2015). NYC is underlain by inclined crystalline basement rock that dips from northwest to southeast. Following this incline, the bedrock outcrops in parts of the Bronx and northern Manhattan, with generally thin overlying unconsolidated deposits in much of the Bronx, Manhattan, Staten Island, and northwest Queens. Much of the remainder of Queens and Brooklyn are underlain by sand and gravel glacial deposits that increase in thickness with the sloped bedrock from nearly zero in northwest Queens to over 1,100 feet at the southeast edge of the city (Soren, 1971). These aquifers were historically pumped extensively for municipal supply, with pumping in the easternmost parts of the city continuing through the 1990s (Buxton & Shernoff, 1999). This pumping, over a period of many decades, contributed to a decrease in groundwater flow to streams and the coastal and inland wetlands left that remained in the urban area.

In addition, many of the city's tidal creeks and coastal wetlands were extensively landfilled from the 18th through the 20th centuries (Sanderson & Brown, 2007; Soren, 1971). Today, many of the city's coastal communities are underlain by urban fill materials, which are highly variable in thickness and composition across the city (Walsh, 1991; Walsh & LaFleur, 1995). In many of these areas, the hydrographic legacy of the historic stream corridors remains, and these areas are underlain by very shallow groundwater. The hydraulic properties of historic landfill materials also remain poorly characterized, with implications for the ability to predict groundwater levels and flow using numerical groundwater models.


Areas underlain by shallow water tables (the surface representing the approximate depth to saturation with groundwater) may experience groundwater flooding during atypically wet seasons when the water table rises above the elevation of subterranean infrastructure or the land surface. Extensive areas of Brooklyn and Queens have an estimated depth to groundwater less than 10 feet (See Figure 20 in Monti et al. (Monti et al., 2013b)). Groundwater levels in other parts of NYC are very poorly characterized due to the more complex fractured bedrock geology and the lack of historic groundwater utilization and monitoring in these parts of the city.

Groundwater flooding is an issue of particular concern in areas of the city that were developed during times when groundwater levels were artificially lowered through municipal groundwater pumping. This includes several neighborhoods in eastern Brooklyn and southern Queens that were developed in the mid- to late 20th centuries, when the surficial, Upper Glacial Aquifer was extensively pumped by the Flatbush, Woodhaven and Jamaica Franchise Areas of the New York Municipal Water Supply Company (Buxton & Shernoff, 1999). Many buildings and

other infrastructure in these areas were constructed by builders that were unaware that the water table was depressed by intensive pumping, or who assumed that pumping would continue indefinitely. When municipal pumping was discontinued due to saltwater intrusion and other water quality concerns, the water table rebounded, rising above the level of subterranean infrastructure such as basements and subway tunnels that had been constructed when groundwater levels were depressed through pumping (Soren, 1976). Many of these communities now require continuous groundwater pumping of basements and tunnels to prevent inundation and may face enhanced risk of groundwater flooding during wet seasons.

## 7.2 Historical Example: Groundwater Flooding in Lindenwood

The Lindenwood section of East New York (located at the border of Brooklyn and Queens) is one of several communities across the city that is particularly exposed to groundwater flooding due to its development, topography and location near the coast of Jamaica Bay (Figure 20). Like many Jamaica Bay coastal communities, the depth to the water table underlying much of the Lindenwood area was estimated to be less than 10 feet in 2013 (Monti et al., 2013b). Some areas of this community are located on landfilled historic riparian wetlands of Spring Creek and are particularly low in elevation.

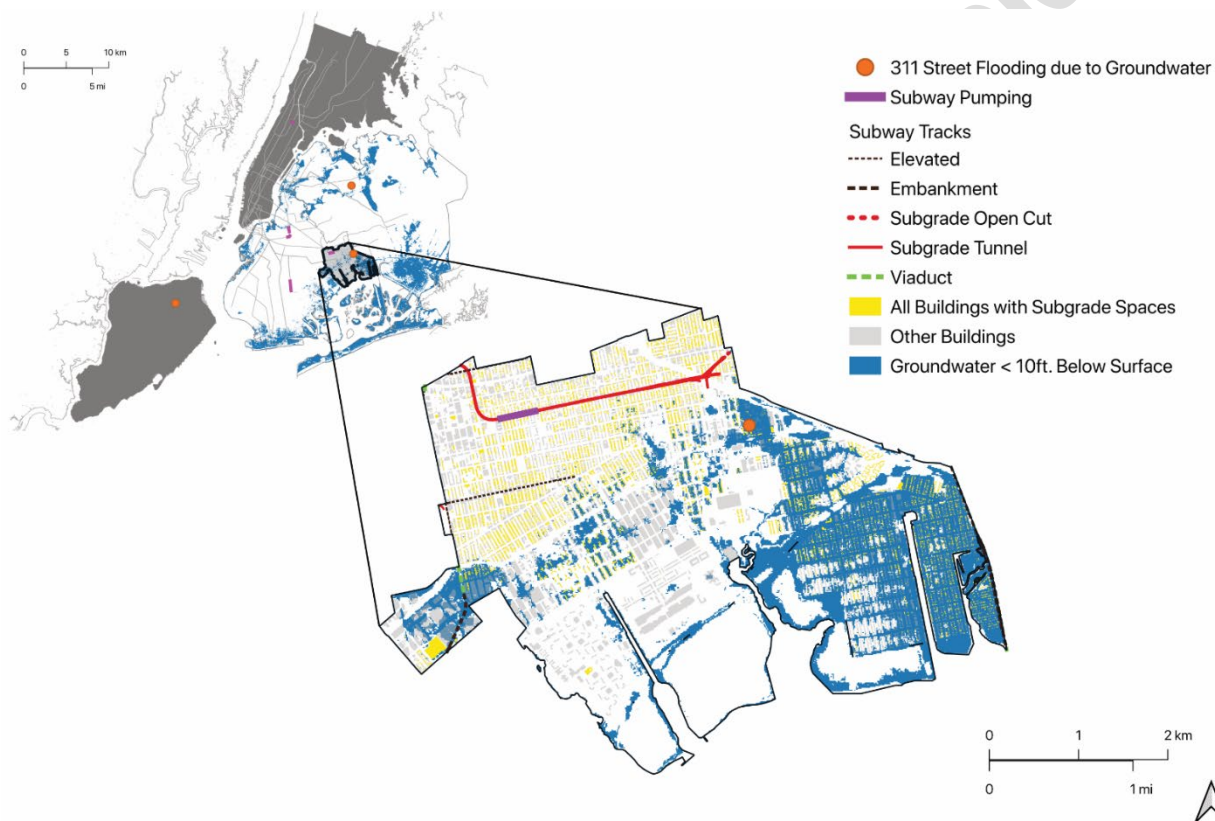

*Figure 20: Shallow groundwater and subgrade infrastructure in East New York--Lindenwood. Subgrade subway tracks in this area already require pumping due to shallow groundwater. In 2010, the New York City Department of Environmental Protection reported groundwater flooding in response to a street flooding service request in this area. Map by BR Rosenzweig*

Groundwater flooding has been a documented issue in East New York - Lindenwood since the 1970s, following the cessation of municipal pumping in the adjacent Woodhaven Franchise Area (Soren, 1976). This includes basement flooding and damage to building foundations due to the elevated water tables. In addition, a 311 service request for street flooding in this area was attributed to a groundwater flooding condition (Unique Key # 16370230 on 4/3/2010 (NYC 311, 2010).



## 7.3 Groundwater Flooding Exposure and Vulnerability

### 7.3.1 Buildings and critical Infrastructure exposed to groundwater flooding

No groundwater flood hazard maps are currently available for the city. As an alternative, for this assessment, we use areas where the depth to the water table has been mapped as shallow as a proxy for areas that may be exposed to groundwater flooding in the future. The USGS conducts an annual synoptic survey of groundwater levels observed in monitoring wells on Long Island each April and May. This surveyed data of the water table elevation is used to develop a map of 'Depth to Water' - the distance from the land surface to the water table. When observational data were available, this survey included groundwater levels in the NYC boroughs of Brooklyn and Queens, which are located on Long Island. At present, April-May 2013 is the most recent period for which groundwater monitoring data is available for these two boroughs, although the USGS and NYCDEP are planning to reestablish groundwater monitoring in these two boroughs and across the city for future assessment of groundwater hazard.

The 2013 Depth to Water layer was used to identify areas of Brooklyn and Queens where the depth to the water table was less than 10 feet below the land surface – this threshold was determined based on the accuracy of the Depth to Water layer Como et al. (2018). In these two boroughs 83,800 buildings are located in areas where the depth to the water table is less than 10 feet. Of these buildings, 33,996 (40.6%) have subgrade spaces and of these buildings, 28,411 (33.9% of the total exposed) are 1-2 residential unit buildings.

Figure 21 and Figure 22 illustrate the extent of shallow groundwater in NYC's boroughs of Brooklyn and Queens, and locations of vulnerable buildings (NYCHA developments and 1-2 story residential buildings with subgrade spaces).

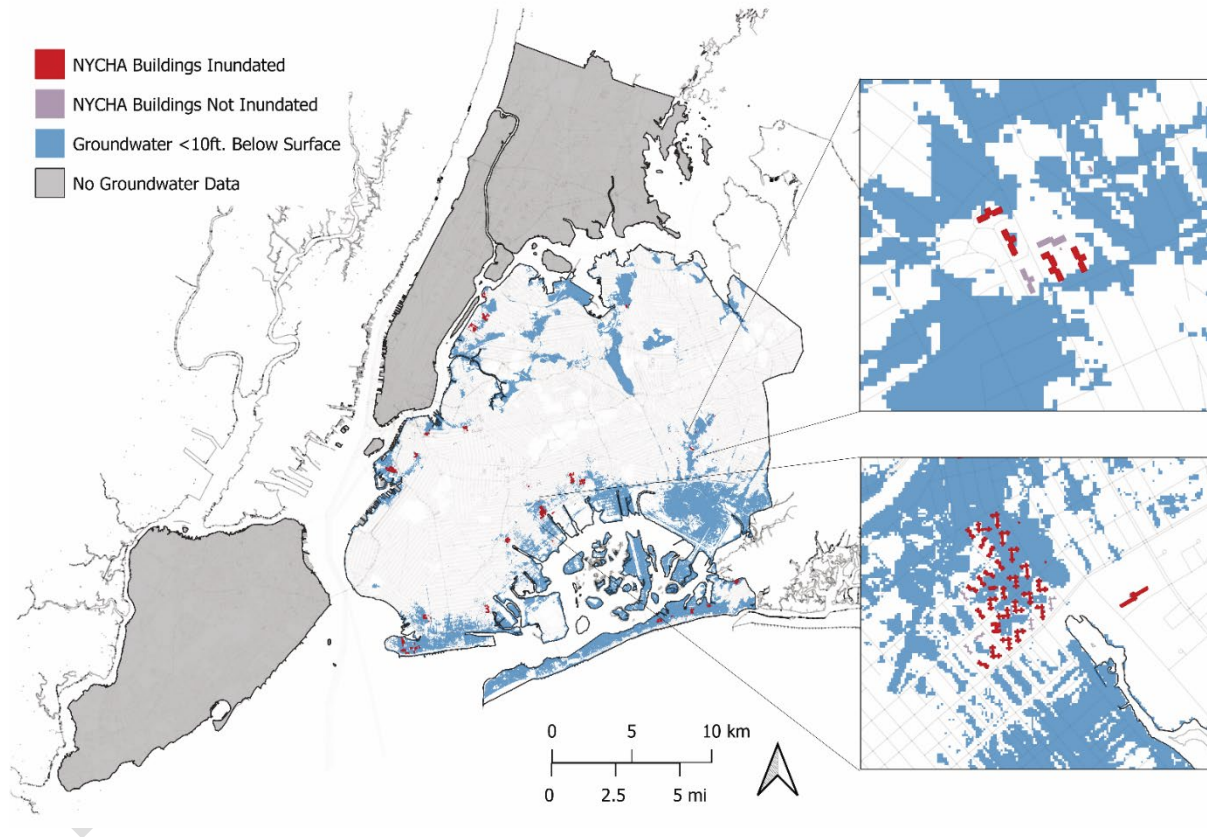


Figure 21: NYCHA buildings located in areas underlain by shallow (< 10 foot) groundwater. Depth-to-water data are currently only available for the NYC boroughs of Brooklyn and Queens. Source: Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

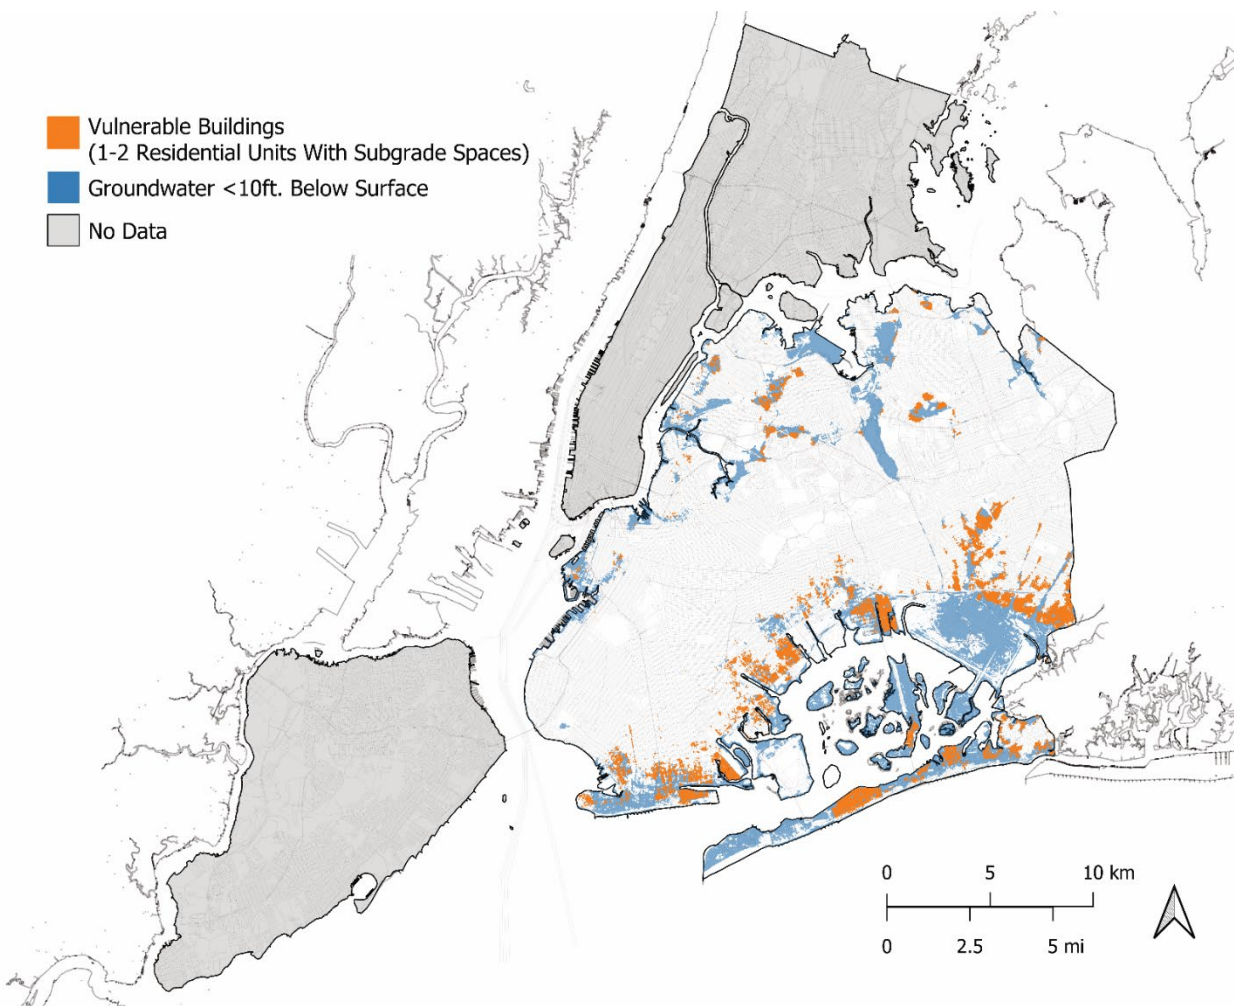


Figure 22: 1-2 residential unit buildings with subgrade spaces located in areas underlain by shallow (<10 feet) groundwater. Source: Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College.

## 7.4 Climate Change and Future Groundwater Flooding

Climate change can potentially exacerbate existing groundwater flood hazards through two mechanisms: First, the projected increases in annual precipitation with climate change (Braneon et al., 2024) may result in a net increase in recharge to the city's surficial aquifers, elevating the water table. However, when the water table is near the land surface, the impact of increased precipitation may be partially mitigated by concomitant increases in evapotranspiration with warmer temperatures (Smerdon, 2017). Predicting climate change impacts on groundwater recharge will be particularly challenging in NYC, where leakage to and from sewers significantly contributes to the subsurface water balance (Buxton & Shernoff, 1999; Buxton & Smolensky, 1999).

The second mechanism results from the impacts of sea level rise on groundwater elevation and flow (Figure 23). At the coast, seawater and groundwater function as a system, coupled through the flow of fresh groundwater towards the sea and the intrusion of dense, saline seawater into coastal aquifers. Close to the shore and assuming uniform soil properties, the water table will stabilize to an elevation that is just above the increased local mean sea level at steady-state (S. W. Chang et al., 2011; Strack, 1976), resulting in emergence at the surface and inundation of areas with shallower water tables - even if they were otherwise protected from direct coastal inundation by floodwalls or dunes at the shore (Habel et al., 2020; Rotzoll & Fletcher, 2013). In relatively flat, humid areas such as NYC, this water table rise will be limited by surface drainage once the water table emerges at the lowest-elevation areas, a process described as 'topography-limitation' (Michael et al., 2013). For example, in a numerical modeling study, Befus et al. (2020) found that surface drainage at topographic low areas significantly limited the areal extent of water table rise in response to rising sea levels across the state of California. However, in NYC, this topography-limitation



effect could actually lead to concentrated groundwater flooding in populated, low-elevation areas of the city where groundwater drains at the surface – even if changes in the depth-to-water in other parts of the city is stabilized through this process. Communities developed in the legacy valleys of filled streams would be particularly exposed to risk through this mechanism. In addition, once the water table rise is stabilized by groundwater emergence at the surface, the groundwater freshwater-saline interface will begin advancing inland (S. W. Chang et al., 2011; Werner & Simmons, 2009), a process known as saltwater intrusion that would exacerbate corrosion damage of subterranean infrastructure located below the water table and harm to inland NNBS that are not adapted for saltwater as described previously (Tansel & Zhang, 2022). Courtney et al. (Courtney et al., 2023) found evidence that tidal fluctuations are propagating further into a Hudson River tidal wetland today more so than they were 20 years ago.

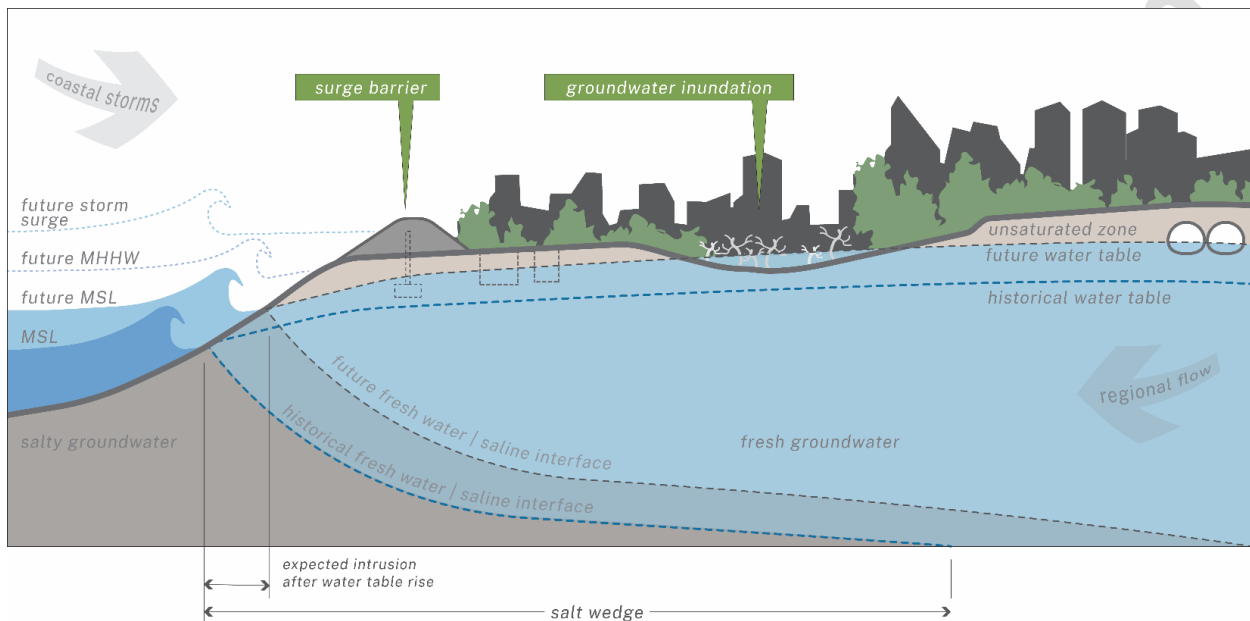


Figure 23: Sea level rise and surficial groundwater at an idealized shoreline. Figure by the authors.

## 7.5 Persistent Knowledge Gaps: Groundwater Flooding

The idealized case of a uniform groundwater aquifer at steady state that we described above provides a useful first assessment of the potential magnitude of water table rise due to sea level rise, and this assessment has been utilized in previous studies of climate change and urban groundwater flooding (Rotzoll & Fletcher, 2013; Sukop et al., 2018). However, actual groundwater conditions and the response to sea level rise in NYC will be determined by our local aquifer and infrastructure conditions (Bonneau et al., 2017; Sharp et al., 2003). As such, care should be taken in drawing conclusions from studies completed for different locales and spatial scales. In NYC, groundwater conditions are not idealized in that water table elevations will be influenced by sewers (Liu et al., 2018; Su et al., 2019, 2022) and site-scale groundwater pumping for dewatering, which may mitigate the amount of water table change due to sea level rise but exacerbate saltwater intrusion. Furthermore, changes to historic shorelines and low-lying areas that were filled as the NYC area was developed will also influence groundwater response to sea level rise and groundwater recharge (Mancini et al., 2020). Nonetheless, these initial, available studies are useful in identifying *potential* risks and considerations for evaluating NYC's groundwater flooding hazards.

In addition, the steady-state assumption does not allow for the assessment of the timing of the groundwater response to sea level rise. Numerical models that can simulate the transient water table response in heterogeneous aquifer systems can provide enhanced understanding of groundwater flood hazard under different scenarios of sea level rise (Habel et al., 2019), but the predictive skill of these models is highly dependent on the availability of data on spatially distributed aquifer properties, the location and depth of sewers and subterranean groundwater drainage systems, and on observations of groundwater levels for model calibration and validation (Bossler et al., 2022).

Understanding sea level rise impacts on the shallow groundwater system in NYC in light of anthropogenic influences (e.g. urban drainage systems) is the subject of an upcoming U.S. Geological Survey study (USGS, *Personal Communication, March 8, 2024*). The USGS has signed an agreement with NYCDEP to reestablish, operate, and

maintain a hydrologic-monitoring network program in NYC designed to focus on groundwater-flooding assessment, resiliency efforts, and hazards mitigation.

As the groundwater monitoring wells are reactivated, the USGS-NYCDEP study will focus on the following elements:

- Conducting applied research to aid in the efficient and economical implementation of groundwater flooding abatement systems.
- Developing a groundwater map for Staten Island to inform current and future design of Bluebelt stormwater management corridors.
- Investigating and modeling the effects of sea level rise and saltwater intrusion upon the groundwater system and Bluebelts in Queens and Staten Island.
- Investigating and modeling potential ground subsidence resulting from a lowered groundwater table.

Additional research is needed to improve understanding of how sea level rise could increase groundwater flood hazards and associated impacts on the city's infrastructure systems on a site-by-site basis. A higher water table could increase the need for pumping to the inundation of subways, tunnels, utility vaults and other subterranean infrastructure by infiltrating groundwater. Increased pumping will require increased electricity demands. In addition, if the pumped water is discharged directly into nearby waterways. This could also result in increased loading of nutrients or other groundwater contaminants to these water bodies. For example, Benotti et al. (2007) estimated that contemporary subway dewatering contributes to nitrogen loading in NYC's Jamaica Bay.

Rising water tables could also reduce the conveyance capacity of sanitary and stormwater drainage systems and limit exfiltration of stormwater from the base of green stormwater infrastructure facilities (Liu et al., 2018; K. Zhang & Chui, 2019), potentially exacerbating pluvial flooding (Section 4.1). At higher elevations, groundwater can also infiltrate into septic systems (Habel et al., 2020) and reduce the service life of pavements (Knott et al., 2017, 2018). Limited information is available regarding the impact of rising groundwater levels on shoreline flood protection infrastructure such as sea walls and levees, and specifically the potential for groundwater flooding inland of these systems that could reduce their overall effectiveness (Habel et al., 2020; Rotzoll & Fletcher, 2013).

## 8 Compound Flooding

### 8.1 Compound Flooding Hazard Characterization

The impacts of NYC's four flood hazards (coastal, fluvial, pluvial, groundwater) can be compounded when they occur in combination. For example, a tropical cyclone that brings both heavy rain and storm surge could result in coastal, fluvial, and pluvial flooding. An intense rainstorm that occurs in the spring or during a very wet season when groundwater tables are elevated could result in both groundwater and pluvial flooding (Corada-Fernández et al., 2017). Future climate change and sea level rise could aggravate the effects of compound floods by increasing their frequency (Lai et al., 2021) or altering the co-occurrence of flood drivers (Ward et al., 2018). An initial analysis of historical observations found that the likelihood of joint occurrence of extreme rainfall and storm surge within a given storm system (defined as a three-day window) has increased over the past century, possibly due to climate change (Wahl et al., 2015).

Federal risk assessment and forecasting have, however, rarely incorporated multiple flood hazards into flood modeling due to the limited capabilities of existing models and lack of statistical assessments of compounding factors (P. Orton et al., 2012). Compounding of floodwater sources has not been incorporated into flood hazard mapping from FEMA (e.g. flood insurance rate maps) or NOAA (e.g. SLOSH Maps) (NOAA National Hurricane Center, 2023; Zachry et al., 2015). This deficiency is gradually being addressed, with new models being developed and methods applied to better assess compounding. For example, the USGS New York Water Science Center is assessing compound flood risk from the combined effects of sea level rise on storm surge, tidal and groundwater flooding, and stormwater (United States Geological Survey, 2021). This research project is exploring and mapping vulnerability to individual and co-occurring flood drivers across the project study area, which includes NYC. The study also includes developing a coupled model framework that links coastal, groundwater and stormwater models to better understand the dynamics connecting surface stormwater, coastal ocean, and groundwater.

The most widespread compound flood hazard for NYC is likely compound hazard from rain and storm surge, given that coastal and pluvial flooding commonly co-occur during coastal storms. Analyses of historical data under the

Climate VIA project have quantified the baseline present-day hazard from co-occurrence of these two drivers (Z. Chen et al., in Preparation). The research focused on simultaneous and near-simultaneous rain and storm surge through analysis of hourly historical data because NYC is located on several small, heavily urbanized watersheds, where the time of concentration is short, and rain and surge must be nearly simultaneous to cause compounding. This is an improvement upon prior assessments that analyzed daily rain totals and looked at three-day windows for assessing co-occurrences (Lai et al., 2021; Wahl et al., 2015). The new analyses included ranked correlations of rain and surge and joint return period analyses. Storm types were separated into tropical cyclones, extratropical cyclones and “neither” events (e.g. localized convective thunderstorms) using historical storm track datasets.

The results of this new research reveal non-zero correlations between rain and storm surge, suggesting that there is a higher probability of one variable being extreme when the other is extreme. When all storm types are merged together, rain and surge have a low, but non-zero rank correlation. However, for TC data alone, their correlation can be high. In addition, when one of the two flood drivers is extreme (the “primary” driver), the magnitude of the secondary flood driver during TCs is much higher than for other storm types. Even though they occur less frequently than extratropical cyclones or other storm events, rain and surge during the most extreme cases (the upper tail region of the probability distribution) are more correlated for TCs than for all events combined (a combined assessment). Assessing extreme (50- and 100-year) joint rain-surge events from TCs gives a worse rain and surge hazard than assessing all events combined. As a result, TCs require separate hazard assessments to avoid underestimation of extreme compound flood hazards (Z. Chen et al., in Preparation).

The timing of the joint flood drivers is also important to their potential compounding. For TCs alone, there are moderate negative correlations between peak rain intensity and the lag to peak surge, indicating that the most intense TC rain and surge events (e.g., 100-year) have the most potential for simultaneous extreme flood drivers and thus, compounding. Prior studies have only focused on New York Harbor (the Battery) but a paired assessment of Kings Point tide gauge data addresses compound flood hazard for South Bronx and Northern Queens. It showed this area has qualitatively similar compound rain-surge compound hazard characteristics. However, we found the peak surge at Kings Point tends to have 2-6 hours of lag time behind the peak rain rate during TCs (due to slow surge propagation along Long Island Sound). This could reduce the risk of pluvial-coastal compound flood hazard but raises the risk of fluvial-coastal compound flood in nearby Bronx River.

## **8.2 Historical Example: Tropical Storm Irene**

Tropical Storm Irene 2011 hit NYC with a large storm surge (4.2 feet at the Battery), high coastal water levels, and simultaneous heavy rainfall. The compounding by rain and river streamflow increased peak water levels only very slightly (2%) in New York Harbor (P. Orton et al., 2012). No street flood sensor observations or flood modeling existed for NYC during that storm, but the combination of “moderate” to “major” NWS coastal flood levels along shorelines of NYC and heavy rainfall (as much as 3.3 cm in 1 hour; 14.4cm in 12 hours) may have caused compound flooding. This lack of quantitative evidence has motivated efforts to deploy hundreds of real-time flood sensors on streets (City of New York et al., 2024; Silverman et al., 2022) and to develop hydrologic and hydraulic models of the city (City of New York Mayor’s Office of Resiliency, 2021), both of which can be used to quantify compound flooding and better understand the potential efficacy of mitigation strategies.

## **8.3 Compound Flooding Exposure and Vulnerability**

While very little detailed quantification of on-the-ground compound flooding has been possible until recently, areas believed to experience compound flooding are typically in coastal flood zones, and include locations like East New York, The Rockaways, and Gowanus. In-situ observation efforts like FloodNet, are poised to greatly expand the data available to quantify the City’s flooding.

## **8.4 Climate Change and Future Compound Flooding**

Given the relatively new science of compound flooding, relatively little research has looked at quantifying future trends. However, rising sea levels alone are likely to cause worsened compounding of pluvial flooding in coastal floodplains, and any intensification of rainfall extremes could similarly compound coastal floods. Recent work by Gori et al. (2022) showed that extreme rain and surge correlations could rise by up to 25% by 2100 due to climate change, and both SLR and storm climatology changes are important to the rainfall-surge joint hazard at the NY/NJ area. The recent Stormwater Resiliency Study (City of New York Mayor’s Office of Resiliency, 2021) assessed future rain intensity change and SLR impacts on pluvial flooding. Research prior to that study used global climate model results for changes to extreme rainfall and used simplified conservative (high-end flooding) modeling approaches by assuming it is always during the high tide for all the extreme rainfall scenarios (Ghanbari et al., Submitted).

## 8.5 Persistent Knowledge Gaps: Compound Flooding

Completed recent research (City of New York Mayor's Office of Resiliency, 2021) has mainly focused on pluvial flooding and sea level rise, but more comprehensive research on all flood hazard types, including groundwater and Bronx River-fluvial compound flooding is needed. Moreover, rain-surge compounding is also increased by tides, and thus quantification of the joint rain-surge-tide probabilities is important for determining the compound flooding. While most research to date has focused on less-frequent, extreme compound events, more research on the chronic flooding that will result from more-frequently occurring high tides and the infiltration of groundwater into storm sewers is needed.

A critical next step will be compound flood modeling and analyses of street flood observations alongside the results of statistical assessments like those summarized above, to translate these data into an understanding of actual on-the-ground impacts; two drivers can co-occur, but their combined flood depth is often less than their sum.

Further use of 311 flood-related service requests and NYC FloodNet Street Flooding observations (Silverman et al., 2022) can greatly aid these research endeavors. The impact of climate change on compound flooding is another area of future research. The improved understanding of past and present-day compound flood hazards presented above helps identify the factors needed to study future changes in compound flooding. For example, tropical and post-tropical cyclones are an important area of study for the most extreme compounding events, and the climatological changes to these storms are an important area for future research.

## 9 Flood Risk Management (FRM)

### 9.1 Context for Flood Risk Management (FRM)

As discussed throughout this chapter, NYC's ecology and development history play an important role in contextualizing the geography of the city's contemporary flood risks. Many of today's flood hazard areas were historically natural streams and wetlands (Figure 1) that flooded regularly. But the risks associated with pre-urbanization flooding in these areas were low since the ecological communities found there were well-adapted to these conditions, and the human population exposed to these floods was relatively low. Contextually, this pre-urbanization level of flood risk can be viewed as an **unavoidable** floor (Figure 24, left), below which risk cannot be reduced. It is worth noting that even if the NYC metropolitan area had never urbanized, flood hazards – and in turn, flood risk - would have continued to increase through the 20<sup>th</sup> century, due to the effects of global climate change on sea level and precipitation patterns (as represented by the yellow box on the first column).

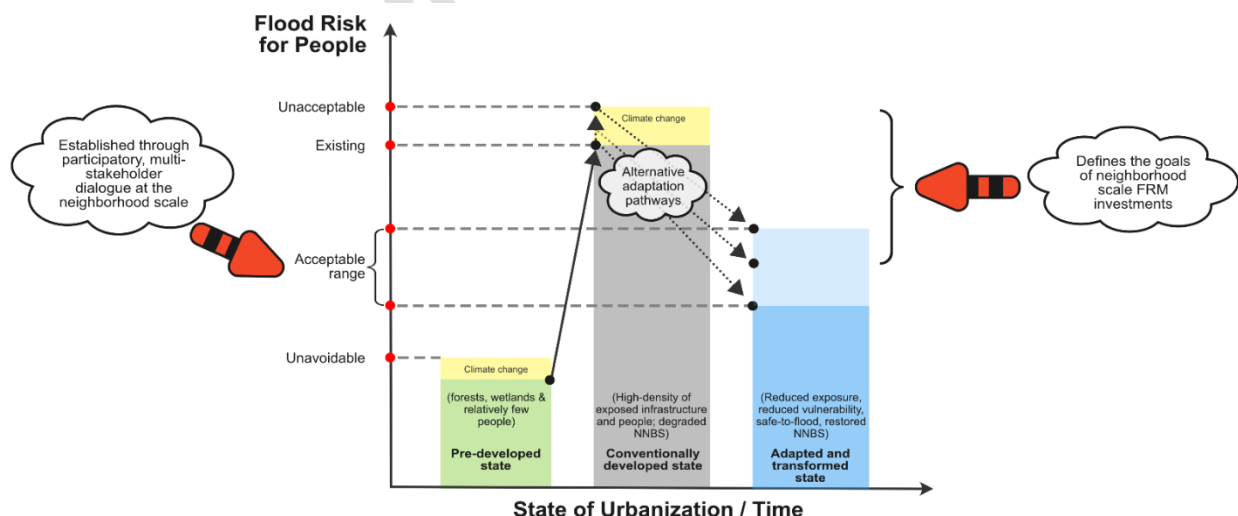


Figure 24: Evolution of flood risks for people as a function of urbanization, climate change, and adaptation pathways. The yellow boxes represent increases in flood risk due to climate change. The heights of the green, grey, and blue bars represent NYC flood risks in pre-developed, conventionally developed, and adapted/transformed states, respectively. The solid arrow represents the increase in flood risk due to historical urbanization. The dotted arrows represent alternative adaptation pathways as could emerge participatory, multi-stakeholder decision making processes use to plan FRM Source: (Figure credit: FA Montalto)

As the city urbanized, streams were filled and natural areas were replaced with impervious surfaces, the potentially exposed population grew into the millions and flood risks for people greatly increased (Figure 24, middle). More people and infrastructure systems were exposed to each flood, without the natural buffering provided by the historical ecological systems. As in cities across the country (National Academies of Sciences, Engineering, and Medicine, 2019; Wasley et al., 2023), the impacts of flooding came to be experienced differently across different populations. As evidenced by the severity of flood impacts documented throughout this chapter, this **existing** level of flood risk is already high and climate change (e.g. yellow box, middle column) will raise it further. Given the extensive work by NPCC and other researchers to quantify the potential effects of climate change on the city, and the growing attention being given to flood risk management, the current level of flood risk ought to represent a ceiling, above which future flood risks are not allowed to rise.

To orient adaptation investments made in the city, there is a need for open, public, inclusive, multi-stakeholder deliberation about the range of future flood risks that are **acceptable** to NYC residents. This deliberation is a necessary precursor to adaptation decisions which are inherently political and driven by values – both expressed and unexpressed - about what to preserve, what to change, and what to allow to evolve in an un-managed fashion (Mach & Siders, 2021). Adaptation decisions will have long-term, legacy implications and will create path dependencies that cut off future options available to reduce flood risks (Haasnoot et al., 2021), especially in the neighborhoods directly impacted by them. At this important phase in the city's dynamic development, community members need to work with governmental decision-makers, scientists, and others to decide what level of future flood risks they are willing to accept in their communities, and which of many adaptation pathways (e.g. unique combination of FRM approaches) will be pursued to achieve those goals. An overview of the FRM options that are available is provided in the next section.

## 9.2 Scope of Flood Risk Management (FRM)

Flood risk management (FRM) is an evolving term used to describe a variety of structural and non-structural approaches – or responses - (Figure 25) that seek to decrease the human and ecological impacts of floods. As defined here, following UNDRR (2023) and (Wasley et al., 2023), structural measures include some form of physical infrastructure, or the application of engineering, including nature-based engineering, to reduce flood risks. Non-structural measures use knowledge, practice, agreements, laws, policies, capacity building, financing, and public awareness raising and educational campaigns to accomplish the same goals. FRM seeks to minimize the impacts of climate change through mitigation (Sharifi, 2021); reduction in inundation exposure through gray- and nature-based approaches (Depietri & McPhearson, 2017; L. E. McPhillips et al., 2021; P. M. Orton et al., 2015); and a reduction in vulnerability factors (Kim et al., 2019; Rufat et al., 2015). FRM can be planned by government agencies with a responsibility for water or flood management but can also be initiated by flood-exposed stakeholders themselves. When FRM actions have the unintended consequence of increasing flood risk, they can lead to maladaptation (see Section 3.5).

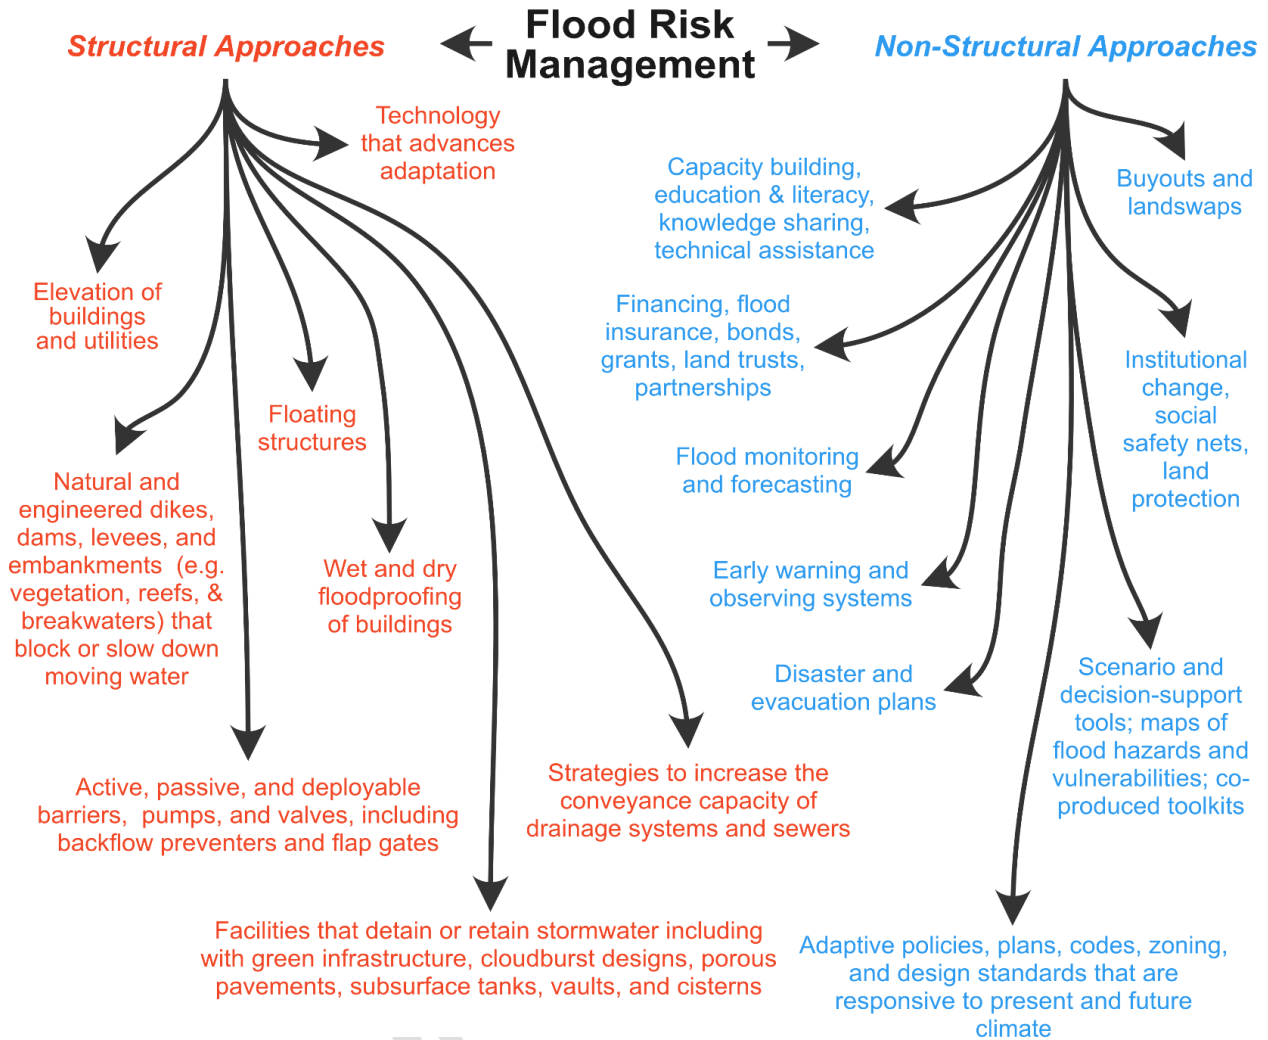


Figure 25: Structural and Non-Structural approaches for addressing the human and ecological impacts of floods. Some portions of this figure were adapted from Wasley et al. (Wasley et al., 2023) Graphic by FA Montalto.

Decisions regarding FRM are complex because they involve selecting which combination of responses should be implemented, at what spatial and temporal scales, to manage which types of floods, with what intended impact, and through what kinds of partnerships and collaborations. Over the past two decades, the principles guiding FRM have evolved rapidly. There has been a shift from responses that sought principally to control floods, to responses that made it easier to live with them, to most recently learning and change processes that sought to fundamentally transform communities to reduce risk in the long-term (Rözer et al., 2022; L. Wang et al., 2022). Prior to this century, FRM responses were predominantly reactive, structural, and undertaken after a flood occurred. Today, increasingly – though perhaps not fast or widely enough – FRM is viewed as a critical component of a multifaceted, pro-active strategy that seeks to reduce the vulnerability and increase the livability of flood prone communities before, during, and after flooding events, in the context of climate change and ongoing urbanization (Abdel-Mooty et al., 2022; Cea & Costabile, 2022).

Martin-Breen and Anderies (Martin-Breen & Anderies, 2011) introduced a taxonomy that can be used to define different classes of FRM adaptation responses. This schema differentiates between *Resistance*-based responses that seek to “bounce back” to pre-flood ‘normal’ conditions (e.g. the Resistance Approach)(Abdulkareem & Elkadi, 2018; Liao, 2012), and *Resilience*-based responses that involve either an incremental adaptation to a new post-flood ‘normal’ state (e.g. the Adaptive Approach), or a fundamental transformation of the social and ecological conditions that determine flood risk (e.g. the Transformative Approach) (Martin-Breen & Anderies, 2011). The Resistance approach to FRM fundamentally seeks to preserve the status quo in the exposed community by ‘fighting with water’ in different ways to keep it away from where it can have negative impacts. It is typically applied at larger spatial scales, for example by building a levee, seawall, or flood gate dyke (McClymont et al., 2020). If it exacerbates flooding elsewhere, it can lead to maladaptation. The two Resilience approaches involve decentralized actions inside communities but at different scales and for different purposes as broken down below:

- Because it recognizes the need for exposed communities to ‘live with water’, the **Adaptive approach** may incentivize property retrofits (e.g. various forms of floodproofing, and/or elevation of buildings or utilities) or other measures that prepare that community for a specific future condition.
- Recognizing the same need, the **Transformation approach** does not adopt any fixed end point (e.g. either a historical or future normal condition) as the goal for FRM. Rather, it accepts that climate change (and other social and ecological processes) is creating a dynamic, evolving context in which continuous societal change and transformation will be needed, for example determining where and how people live, and where and how natural systems are integrated into developed landscapes. Like the Adaptive resilience approach, these changes can be decentralized and small-scale. But like the Resistance approach, these changes could also drastically modify how entire communities look and feel. All three approaches can be implemented through various combinations of structural and non-structural measures, but with significantly different end goals governing how they are applied.

### 9.3 Pros, Cons, and Caveats of Different FRM strategies

It is crucial that decision-makers, community members, and others be cognizant of the challenges and tradeoffs associated with different FRM responses as they collaborate to design comprehensive FRM strategies for specific districts, neighborhoods, or properties in NYC. An overview of these factors is provided below.

#### 9.3.1 Resistance responses

Resistance responses can be among the fastest and easiest ways to provide immediate protection to existing communities, though recent reviews (Cea & Costabile, 2022; McClymont et al., 2020), point to several potential unintended consequences (e.g. maladaptation) specifically of the engineered components of this approach:

- Resistance strategies frequently prioritize flood control over the need to conserve, restore, and/or create natural systems, undervaluing the natural water regulating services that NNBS provide. Historical investments in engineered flood control measures nationwide often came at the expense of NNBS, increasing natural systems vulnerability (McClymont et al., 2020), and reducing their ability to provide ecosystem services. In urban contexts, a general lack of understanding about how to integrate natural systems into the built environment resulted in a significant loss in the ability of natural systems to buffer the impacts of floods. Resistance strategies can cost-effectively reduce flood frequency and associated impacts and can also be designed to protect vulnerable NNBS. However, these same responses can also result in negative ecological impacts. These negative impacts could include changes in sedimentary systems, water column stratification, animal migration and habitat connectivity (P. Orton et al., 2023). Tognin et al (2021) documented how operation of the Venice storm surge barrier can reduce episodic sediment supply to tidal wetlands, compromising their ability to provide ecosystem services. Barriers can provide a temporary solution to sea level rise but set up difficult long-term choices between natural system function and human welfare. Already,



many existing surge barriers are being closed with increasing frequency due to sea level rise, reflecting the potential for their overuse (P. Orton et al., 2023).

- Some Resistance strategies can cause maladaptation by transferring flood hazards from one location to another. For example, sea walls and levees like those under consideration by the US Army Corps of Engineers as part of the NY & NJ Harbor and Tributaries Focus Area Feasibility Study (NYNJHATS) can, under some conditions, increase water levels and induce flooding both upstream and downstream of them (Hummel et al., 2021).
- Once built, Resistance designs can be difficult to retrofit and adapt. This obduracy (Chester et al., 2019) can result in their eventual failure and obsolescence as the climate and other conditions continue to change around them.
- Resistance strategies can cause a false sense of security (“the levee effect”) among residents in the protected community who believe that the risk of flooding has been eliminated. If this perception results in less flood preparedness, cancelled insurance policies, or if it leads to more development in these communities, it can increase risk in the long-term (National Research Council, 2013), even if it initially drops, and especially if future sea level rise turns out to be greater than the rates assumed by the levee designers (Han et al., 2020).
- When such systems fail, the consequences can be worse than would arise without protection, since other flood preparation measures may not be in place (F. Zhang et al., 2020).
- By controlling floods, Resistance strategies reduce the capacity of communities for episodic adaptation and learning, compounding vulnerability over time.
- By reducing personal experiences of flooding, public understanding of floods and motivation for planning and implementation of FRM can become limited to public messaging and general information, increasing latent risks.

### 9.3.2 Resilience responses

By adapting and/or transforming communities, Resilience responses reduce flood vulnerability. However, as synthesized by (McClymont et al., 2020; Rözer et al., 2022), Resilience responses also present several key challenges:

- As broached in the Futures and Transitions Chapter, Resilience Strategies that require individual actions (e.g. elevating utilities, downloading an app) require that local stakeholders have access to information and resources about flooding. Local stakeholders also need agency in FRM decision-making, and the ability to self-organize if they are to have the capacity to implement these measures.
- By prioritizing decentralized local measures, Resilience strategies can have the unintended consequence of shifting flood management responsibility from government to flood vulnerable groups who may not have the knowledge or resources to design, implement, and maintain FRM in the long term.
- These strategies can be logistically, socially, and institutionally complex to implement since they must modify a large fraction of the flood vulnerable area to meaningfully reduce overall risks and require collaboration among multiple stakeholders.
- The Transformative approach can also imply significant demographic, socioeconomic, and cultural changes, with potential implications for environmental and climate justice – both positive and negative – that must be considered.

### 9.3.3 Natural and Nature-based Systems (NNBS) responses

To address the historical, anthropogenic dimensions of flood hazards, many FRM plans include NNBS. Under the right conditions, NNBS can provide flood protection and mitigation in both short-term and long-term FRM plans (Bridges et al., 2021; L. McPhillips et al., 2023). However, in their current highly modified configuration, NYC's NNBS would need to be significantly enhanced and expanded if they are to address the most significant flood hazards facing the city.





Some of the flood reducing ecosystem services of NNBS include:

- **Storm surge attenuation:** High elevation and continuous salt marshes can reduce storm surges by 1.7-25 cm/km, especially when the marsh has a high elevation and is continuous (Leonardi et al., 2018; Wamsley et al., 2010).
- **Wave attenuation and reduction in erosion:** Even salt marshes that are too small to mitigate storm surges can be an effective means of attenuating storm-driven wind waves, reduce wave related flooding, and reduce erosion (Marsooli et al., 2017). Depending on the density and condition of marsh vegetation, these systems can attenuate waves with up to 95% reduction in wave energy occurring over just 100 meters of marsh with 50% vegetation cover, and this same attenuation over even shorter distances with denser vegetation (Castagno et al., 2022).
- **Mitigation of fluvial flows:** Stream restoration and stream daylighting can help spread out and dissipate fluvial floodwaters (Swadek et al., 2021).
- **Mitigation of soil crust formation:** Terrestrial vegetation canopies can play a key role in protecting urban soils from the impact of raindrops, which could otherwise break up soil particles and create a surface crust that, in turn, reduces infiltration and increases runoff (Alizadehtazi et al., 2020).
- **Stormwater management:** In addition to NYCDEP's standard ROW GI, urban parks (Feldman et al., 2019), vegetated urban yards (Mason & Montalto, 2015), and Stormwater Capture Greenstreets (Catalano De Sousa et al., 2016) can also be used to attenuate urban runoff, and can contribute to reducing the severity of flooding during extreme rain events when designed with low hydraulic loading ratios (e.g. the ratio of the tributary catchment area to the GI facility area) and/or as part of a comprehensive, watershed-level approach. Green roofs (Abualfaraj et al., 2018) and various kinds of permeable urban surfaces (both vegetated and unvegetated) will not yield runoff during moderate rain events that occur in NYC (Alizadehtazi et al., 2016).
- **Mitigation of coastal flooding:** A novel NNBS approach of shallowing estuary bathymetry has been shown to be particularly effective for reducing coastal flooding around Jamaica Bay (Marsooli et al., 2017; P. M. Orton et al., 2015; Stevens Institute of Technology et al., 2015). While it is well-established that historical dredging, landfill and wetland loss in the Bay are a major factor in current tidal and extreme event flooding (P. M. Orton, Sanderson, et al., 2020; Pareja-Roman et al., 2023; Stevens Institute of Technology et al., 2015), only limited research has been conducted into the potential for this type of NNBS to be used solely or in combination with hard infrastructure or non-structural approaches for mitigating flooding for mitigating Jamaica Bay flooding.

The flood protection value of NNBS is, however, highly dependent on local conditions, design (Wong et al., 2020), and the scale (e.g. land area) over which these systems can be implemented. The following factors limit the ability of existing NNBS to provide FRM services in NYC.

- **Limited remaining wetland extent:** The large area of salt marsh that would be required to effectively reduce coastal flooding does not exist in NYC due to its natural deep harbor and 20<sup>th</sup> century development with landfill on marshes (P. M. Orton et al., 2015).
- **Siting and design of engineered NNBS:** Stormwater management practices designed for water quality improvement or CSO management are typically intended to capture only the first 1-2 inches of rainfall over their tributary drainage area (TDA) because that 'design storm' (Markolf et al., 2021) generates a volume of stormwater (e.g. the 'water quality volume') that is greater than the volume of runoff produced by 80-90% of all annual rain events. That volume of runoff is also believed to contain the 'first flush' of pollutants that, if captured, provide significant reductions in pollutant loads. GI and other stormwater management practices that are sized to capture more than the water quality volume are often considered oversized and prohibitively expensive (L. M. Cook et al., 2020). GI and other stormwater management practices designed for water quality improvement may thus be too small to mitigate pluvial flooding associated with larger events. For example, Figure 27 compares the NYCDEP design storm depths associated with site and house connections in combined sewer districts to the total accumulation of precipitation during some recent extreme precipitation events. The ability of GI and other stormwater management practices to intercept street runoff can be compromised by inlet clogging, and is inversely correlated to the peak rate and volume of TDA runoff (Catalano De Sousa et al., 2016; Shevade et al., 2020), which are both expected to increase with climate change. GI and other stormwater management practices would need to be made bigger or significantly upscaled to provide FRM as a co-benefit. In its Citywide Cloudburst Program, NYCDEP is piloting a variety of strategies for managing larger quantities of stormwater using curbside porous pavements and stormwater



retention sites located both inside and outside of the right-of-way (City of New York Department of Environmental Protection, 2023), but planning and design these projects are still in the early stages.

- Green gentrification:** Some concern over the potential for NNBS to lead to gentrification has also been expressed. Various forms of NNBS which, in the right configurations, can detain stormwater, reduce waves, and otherwise help to reduce some kinds of flood risks can also increase property values and housing prices, ultimately resulting in the displacement of working-class residents and racialized groups and cultures (“the greenspace paradox”) (Anguelovski et al., 2022). Parks have been positively associated with gentrification processes in mid-sized cities across North America and Western Europe (Triguero-Mas et al., 2022). In NYC, research into this maladaptive role of green spaces is limited. Li (2023) found that the Million Trees initiative raised housing values and attracted more white, educated, and young households, but did not lead to significant gentrification. By contrast, Black and Richards (2020) found that The High Line increased housing values closest to it by 35.3%, exacerbating ongoing gentrification forces in the Chelsea section of Manhattan.

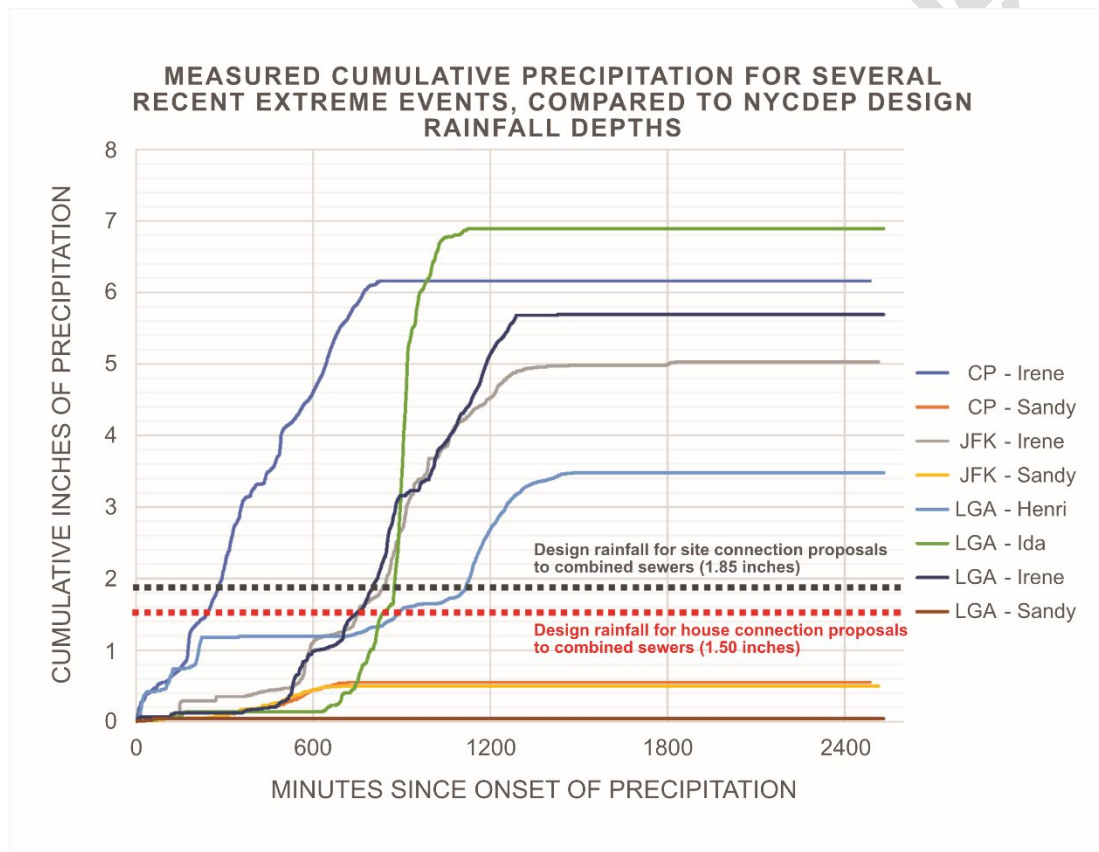


Figure 26: Precipitation accumulations of recent extreme events and NYCDEP design storm depths. CP, JFK, and LGA refer to one minute precipitation data obtained from the gauges at Central Park, John F. Kennedy Airport, and LaGuardia Airport, respectively. The horizontal dotted black and red lines refer to the design rainfall depths used to design stormwater management practices for sites and houses, respectively, when they are connected to combined sewers. House connections apply to 1, 2, or 3 family dwellings less than 20,000 square feet in total site area that connect to a sewer that fronts the house. Site connections refer to all other connections to combined sewers (Figure credit: FA Montalto)

### 9.3.4 Non-structural responses

Non-structural responses can include managed retreat and flood forecasting and early-warning systems, along with policy measures to support recovery when floods occur.

#### Managed Retreat

Though it is often framed as a single response, managed retreat can be implemented gradually and strategically as part of a multidecadal sequence of actions that may include many of the approaches shown in Figure 25,



accompanied by iterative community engagement, vulnerability assessments, planning, and equitable compensation for those who are eventually resettled (Haasnoot et al., 2021). Managed retreat projects that have been implemented across the globe have involved mandatory relocation, along with projects that are community-supported or community-led (Ajibade et al., 2022).

Strategies used to operationalize managed retreat include voluntary buyouts, restrictions on post-flood rebuilding, setbacks of future development from flood hazard areas, conservation easements, and downzoning. Buyouts are a common non-structural approach to flood prevention in the United States. In a buyout, property-owners are offered compensation for the value of their homes if they relocate (Dundon & Abkowitz, 2021; Mach et al., 2019). A buyout requires the government's willingness to buy a property, and the property owner's decision to voluntarily move- a decision that may be precipitated by a flood. Buyouts may be helpful for homeowners, but do not resolve the hardship that flooding poses on renters.

Following Post-Tropical Cyclone Sandy, property owners in severely impacted NYC communities were offered buyouts through the NYC Build It Back and state-level New York Rising Buyout and Acquisition programs (Binder & Greer, 2016; Koslov et al., 2021). Homeowners in central Queens requested buyouts again after the Ida-Remnants Cloudburst (Maldonado, 2021). Through PlaNYC, the City is currently working to develop a "blue-sky" program that will work with households interested in moving away from high-risk areas, by providing housing/financial counseling services to facilitate moving and to minimize long-term displacement from NYC, and then through robust public engagement, converting these properties to sustainable/resilient end uses. Buyouts are discussed more fully in NPCC4: Advancing Climate Justice in Climate Adaptation Strategies for New York City (Foster et al., 2024).

Another approach, land swaps, involves owners of flood prone low-lying properties swapping title with the owner of less flood prone and typically vacant properties within the same community, typically a government agency. Such programs may be spearheaded by residents or led by governmental agencies or non-governmental organizations in sustained partnership with community members. However, even when programs are voluntary, residents can feel compelled to participate, especially if they lack other means of remaining safely in exposed locations (Yarina et al., 2019).

In NYC's Edgemere neighborhood, pilot land swaps – some of the first to be implemented for FRM anywhere in the country - were used to allow property-owners whose homes had been damaged by the storm to exchange their property titles for city-owned property with newly constructed homes in the neighborhood that were not located in the FEMA SFHA. As part of these efforts, a community-led visioning exercise so that community members could determine how to best utilize the undeveloped flood prone properties in a sustainable way that also serves longstanding community needs was conducted (Seip, 2022). The original storm-damaged homes were demolished and converted into city-owned conserved natural lands. But, ultimately, only three land swaps were successfully completed through this program (Spidalieri et al., 2020).

Application of such strategies can prevent exposure to flood hazards when sea level rise and other climate-related changes render other forms of FRM ineffectual. But they can also be fraught with a variety of challenges. (Baja, 2021; New et al., 2023; Yarina et al., 2019) Objectors to managed retreat often express concerns about a lack of transparency and community participation in decisions regarding when and where governments make this option available, a lack of fairness and equity specifically as pertains to community impact in historically marginalized communities, and concerns about the fate of ecological resources (Mach & Siders, 2021). Given that all of NYC is subject to some kind of flood risk, uniform application of managed retreat would imply abandoning large portions of NYC permanently. Advocates suggest that if global climate change continues at its current rate, retreat from low lying coastal area "is an inevitable adaptation action," better planned in advance (Haasnoot et al., 2021). But FRM decisions related to flood exposure, it is important to consider potential inequities. While the wealthy may deliberately accept flood risks, housing options are often more limited for other groups. Decisions regarding where to discourage development and where to protect it are intrinsically related to class, race, and ethnicity (H.-S. Chang et al., 2021; Hendricks & Van Zandt, 2021; Kruczkiewicz et al., 2021) and thus directly related to issues of equity.

### **Flood forecasting and warning systems**

Flood forecasting and warning systems are also examples of non-structural strategies for FRM. They can provide the advanced lead time needed for evacuations, the deployment of active floodproofing barriers, and other emergency planning needed to reduce exposure and vulnerability to flooding when a hazard is imminent. Flood forecasting and warning systems require accurate forecasts of the extreme meteorological events that can cause flooding, numerical models to develop predictions of the extent and magnitude of the resulting flood hazard, and the dissemination of warnings in a manner that is accurate, timely, and can support taking protective actions to reduce flood exposure and

vulnerability (Sadiq et al., 2023). To be useful for risk management, forecasts and warnings must be understood by stakeholders and connected to decision processes. As a result, these systems are reliant on both robust social science, along with accurate physical forecasts (Uccellini & Ten Hoeve, 2019).

Key developments in remote-sensing and in-situ observation technologies, data assimilation, and numerical weather forecast modeling have enabled advances in the forecasting of many types of weather systems. For example, National Hurricane Center forecast errors for Atlantic Basin tropical storms and hurricanes have fallen rapidly in recent decades, and contemporary 72-hour predictions of hurricane tracks are more accurate than 24-hour forecasts were 40 years ago (Alley et al., 2019). There have also been recent improvements in NHC hurricane intensity forecasts (Cangialosi et al., 2020). Accurate forecasting of cloudbursts at the longer lead times needed to support emergency preparations remain limited, however.

For the New York City Metropolitan Region, the NWS Weather Forecast Offices release official consensus coastal flood forecasts and warnings when a storm threatens. The Stevens Institute of Technology Flood Advisory System (SFAS) utilizes ensemble meteorological forecasts and numerical hydrologic and hydrodynamic modeling to provide accurate predictions of coastal total water levels (Ayyad et al., 2022; Georgas et al., 2016). These time-dependent predictions include 5<sup>th</sup>, 50<sup>th</sup> and 95<sup>th</sup> percentile water levels out 4.5 days into the future and are available online where users can also sign up for coastal flood warnings and alerts (Stevens Institute of Technology, 2024). These data are also shared with NWS, who combine them with NOAA model data for their official forecasts.

Operational warning systems for urban pluvial flooding remain in development. Recent advances in convection-permitting numerical weather models and ensemble forecasting make real-time pluvial flood warning systems technologically feasible for the first time. (Schubert et al., 2022) developed a flash flood warning system forced by Quantitative Precipitation Forecasts. This system was able to forecast High Water Marks (HWMs) with a Mean Absolute Error of 2.2ft (0.69m) and to predict flooding distress calls and FEMA damage claims with hit rates of 90% and 73%, demonstrating the potential to operationally forecast urban pluvial flooding, but also the need for continued research and development. Significant investments in both operational H&H model development and computational resources will be needed to increase prediction lead times even to several hours and to reduce the spatial resolution of predictions to less than ~4 mi<sup>2</sup> (10km<sup>2</sup>) (L. J. Speight et al., 2021). Once a flood forecast has been generated, public alert and warning systems provide information to populations at risk of imminent flood hazards, with the goal of “maximizing the probability that people take protective actions and minimize the delay in taking those actions” (National Academies of Sciences & Medicine, 2018). Alerts and warnings can be issued by various entities, such as local, state, and federal governments, schools, and media stations. These entities can utilize multiple methods to send alerts and warnings to the public, including tv/radio broadcast, phone and email technologies and short message service (SMS). In addition, social media has emerged as a necessary component for public alert and messaging in the last decade (Guillot et al., 2020). For example, in NYC, NotifyNYC is an opt-in emergency public communications program available in multiple languages (Notify NYC, 2024). Participants can register to receive alerts about different types of flood-related and other emergencies, through multiple methods of communication such as basement-specific preparedness messaging before expected rain events.

### 9.3.5 The need for an integrated response

As recognized in NPCC4: Advancing Climate Justice in Climate Adaptation Strategies for New York City (Foster et al., 2024), the significant linkages that exist between climate risks, adaptation investments, and socioeconomic inequality means there is no singular approach to equitable flood resilience that is broadly applicable in NYC. Instead, diverse, multiple, and overlapping approaches must be developed with local input crucial in selecting those most suitable to the unique context of each exposed community. Most flood resilience researchers, and various Mayor's Office of Climate and Environmental Justice (MOCEJ) policy documents, now advocate initiating the FRM planning process by considering a diverse, multifaceted, all-of-the-above approach that is gradually tailored to the characteristics, needs, and types of flooding facing each community.

## 9.4 FRM in NYC

Integrated FRM plans for many NYC neighborhoods could ultimately include some or all of the following components (Cea & Costabile, 2022; McClymont et al., 2020; Peck et al., 2022):

1. Non-structural flood-exposure reduction measures – flood exposure reduction measures, flood forecasting and early-warning systems, along with policy measures to support recovery when floods occur.
2. Engineered flood protection measures – including both grey and NNBS- designed to prevent flooding from occurring in targeted areas. These could include engineered dunes to protect against high tides and surges such as have been installed in the Rockaways, as well as features such as the sea walls, levees, and storm surge barriers under consideration as part of the NYNJHATS project. Decisions regarding which



communities receive engineered flood protection carry significant equity implications and should not be based solely on traditional benefit cost ratios that only monetize the value of protected real estate assets. The potential for unintended ecological or social consequences (e.g. maladaptation) should also be evaluated and mitigated.

3. Leveraged and expanded investments in water quality protection – As mentioned in several places in this report, significant investments are being made to improve NYC water quality using both grey and green stormwater management practices which, through enhancement and upscaling, could provide some flood mitigation. As described above, protocols used to site and design GI currently limit the value of this investment for FRM. For GI and other stormwater management practices to be useful in mitigating flooding, they need to be implemented across significantly increased areas than required for compliance with clean water regulations (Atkins, 2015; Regional Plan Association, 2022). An analysis conducted by the Regional Plan Association (2022) asserts that GI application rates in a section of Central Queens would need to be 40x greater than current levels to fully eliminate flood accumulations of 12 inches or more caused by 3.5 inches of rain over an hour, and 60x more to fully eliminate flooding. To achieve such higher levels of GI application, creative new strategies for resolving a wide range of non-trivial surface (e.g. driveways) and subsurface (e.g. infrastructure, utilities, contaminated soils, bedrock, etc.) constraints would need to be devised. To date, these types of obstacles have been a major impediment to GI implementation across the city (NYC DEP, 2014, 2021). The current GI Program prioritizes watersheds that discharge to waterbodies that do not meet their current water use standards. However, as is clear from the City's Stormwater Resiliency maps, pluvial flood hazards are pervasive and GI facilities intended for FRM would need to be applied virtually city-wide. If higher GI application rates are accompanied by strategic modifications to GI design standards (for example, the use of more hydraulically efficient inlets, deeper surface depressions that are directly connected to subsurface vaults and stone reservoirs, etc.), these investments in water quality could be integrated into a community's unique FRM strategy. In communities with high water tables, soils with low permeability and/or excessively high percentages of fine particles, and/or shallow bedrock, these practices would also likely need to be lined and connected via underdrains to local catchbasins (B. Rosenzweig & Fekete, 2018; K. Zhang & Chui, 2019). To overcome the perception that these enhanced GI facilities are overdesigned, and to justify the additional costs associated with their construction and maintenance, the hybrid role intended for this new generation of GI facilities (i.e. water quality improvement and FRM) would need to be recognized formally and encoded in new interagency agreements. Unique and unprecedented cost-sharing strategies would also need to be devised, since these practices would provide a level of service beyond that needed for Clean Water Act regulatory compliance.
4. Make the City Safe to Flood through an Expanded Cloudburst Program – In January of 2023, NYC Mayor Adams announced \$390 million in funding for Cloudburst Resiliency Projects that will include innovative plans to detain, retain, and store stormwater in four flood-prone communities in Corona and Kissena Park, Queens; Parkchester, Bronx; and East New York, Brooklyn (City of New York Department of Environmental Protection, 2023). This program relies heavily on porous pavements, offline storage, and slightly modified applications of existing GI designs. The City could decide to expand this program to include a wide range of innovative features, such as the Cloudburst Roads, Retention Roads, Retention Spaces, and Green Roads currently being implemented in the City of Copenhagen, Denmark (Figure 27). The cloudburst infrastructure being implemented in Copenhagen are a form of Resilience FRM and designed to utilize streets and other surface features to manage stormwater associated with the very extreme rain events (1% AEP/100-year return interval) associated with pluvial flooding (City of Copenhagen, 2012).
5. Structural flood vulnerability mitigation measures – Designs and retrofits such as wet and dry floodproofing that reduce the magnitude of the disturbance relative to a threshold, decreasing the consequences of flooding in the exposed area. Examples include structural measures such as blowout panels to allow for safer egress from basements during floods (FEMA, 2023b). These could also include building codes that require elevating utilities, installing pumps, reinforced basement walls and other similar measures, as implemented recently in Venice, Italy (Editorial Team, 2019).
6. Non-structural flood vulnerability mitigation measures – flood monitoring and forecasting, early warning systems, evacuation and disaster management plans help communities to better understand and prepare for flooding. As an example, the city's expanding network of FloodNet sensors are now being used to record high tides, storm surges, and runoff during extreme precipitation events so that this information can be used to plan FRM and emergency response (Mydlarz et al., 2024).
7. Flood recovery measures – measures that help to recover and return to normal efficiently after a flood event, for example emphasizing reconstruction, rebuilding, compensation, or insurance.



8. Transformational strategies– strategies that help a community to learn, adapt, and gradually change to a suite of dynamic conditions that determine flood hazard and exposure, while simultaneously addressing multiple local needs and challenges
9. Global Knowledge Transfer: Globally, a variety of comprehensive strategies have been developed to manage flood risk, and many opportunities for co-learning between NYC and other regions are possible. As one example, the European Floods Directive (EFD) (Council of the European Union, 2007) was established to reduce the negative consequences of flooding on human health, economic activities, the environment, and the cultural heritage of the European Union (EU). This directive requires EU member states to conduct risk assessments to identify Areas of Potential Significant Flood Risk (APSFR); followed by mapping of the potential consequences of floods of different types and magnitudes; and finally, development of FRM plans including specific measures implemented according to the unique hazard and risk characteristics of each APSFR.
10. Leveraging of federal resources: Nationally, FEMA's recently launched Building Resilient Infrastructure and Communities (BRIC) grant program (Federal Emergency Management Agency (FEMA), 2023) incentivizes pre-disaster capacity building, as well as design and management of infrastructure projects, including projects incorporating NNBS, that reduce flood risk. Executive Order 14030 reinstates the Federal Flood Risk Management Standard that requires agencies to prepare for and protect federally funded buildings and projects from flood risks (Federal Emergency Management Agency (FEMA), 2022). The Bipartisan Infrastructure Law included \$50 billion to help communities protect against multiple hazards including floods.

Some of these FRM components are already built into local FRM plans and policies. The Lower Manhattan Coastal Resilience and the East Side Coastal Resiliency Projects both aim to reduce coastal flood risks in individual neighborhoods of Manhattan. The City of New York's Climate Resilience Design Guidelines (2022a) provide guidance on how to reduce the impacts of extreme precipitation, sea level rise, and heat on capital projects (e.g., infrastructure, landscapes, and buildings). These guidelines focus on reducing stormwater inputs to the city's sewer system and selecting appropriate design flood elevations for Capital projects located in current and future coastal floodplains. In its Neighborhood Coastal Flood Protection Project Planning Guidance, the City of New York (2021) provided guidance for initial concept planning, feasibility and design stages of neighborhood scale coastal flood protection projects that are equitable, resilient, and well designed. This guidance underscores the importance of shaping these projects to address unique neighborhood characteristics, maximize community benefits and improve the public realm. In its long-term vision for Increasing Stormwater Resilience in the Face of Climate Change, NYCDEP (New York City Department of Environmental Protection, 2021) describes a multi-faceted approach which will involve some upscaling its implementation of rain gardens, stormwater medians, onsite detention projects, green roofs, Bluebelts, and cloudburst projects to augment drainage capacity while providing valuable community co-benefits. The Vision also includes interim measures that will improve communication between residents and the City, better maintain existing drainage infrastructure, and better predict where flooding occurs now and in the future. It is noteworthy, however, that these measures do not explicitly address the need to manage higher volumes and intensities of stormwater (e.g. contemporary 100-year or greater rain events), protect the coast, reduce groundwater flooding, or build resilience to compound-hazards.

To date, no community-initiated FRM plans have been developed in NYC. However, while none of the case studies reviewed in the Equity Chapter mention the development of any community-scale FRM plans, other community-scale resiliency planning efforts that emphasize anti-displacement, and a just energy transition are underway, as profiled on the Regional Plan Association's recently launched NYC Climate Resilience Plan Mapper (Regional Plan Association, 2023). PlaNYC and Mayor Adams' Climate Strong Communities program will leverage resources to build climate resilience in communities that did not receive Post-Sandy relief funds (City of New York Mayor's Office of Climate & Environmental Justice, 2022b; City of New York Office of the Mayor, 2023). Examples of individual properties that have developed site-scale FRM plans can also be found throughout the city.

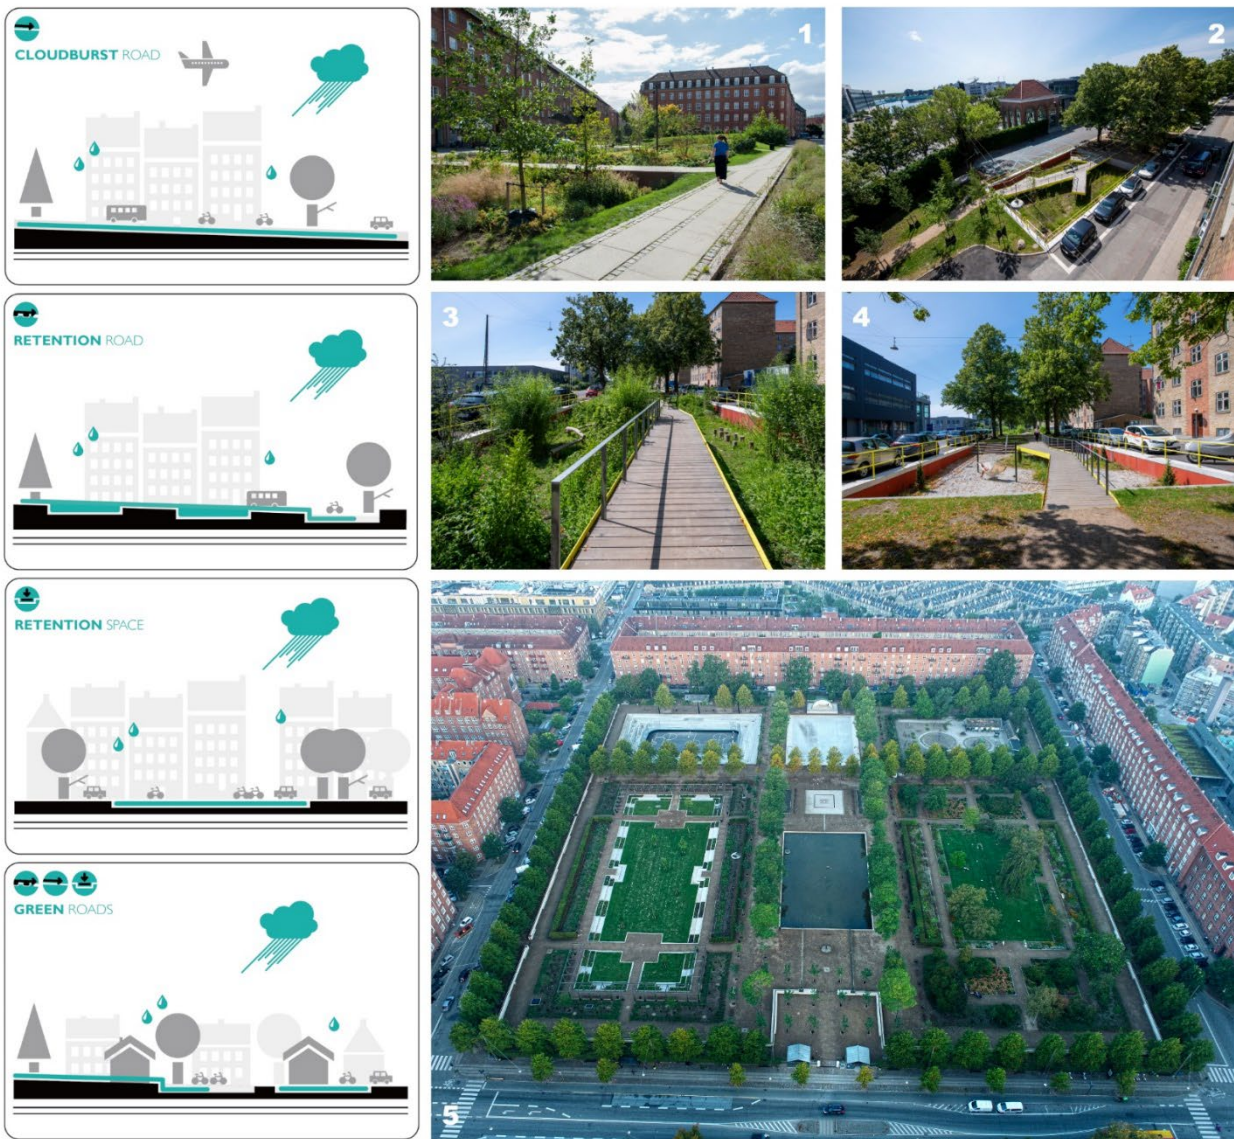


Figure 27: Cloudburst roads (starting upper left) are designed to convey runoff generated during extreme events on the surface to places where that can flood safely. Elevated curbs, recontoured street cross sections, and slightly depressed intersections are used to direct the flood waters. Retention roads (second down, left) are designed to retain and detain flood waters in subgrade cisterns, vaults, and curbside planters integrated into the right-of-way. This approach is similar to NYCDEP's current Cloudburst standards. Retention spaces (third down, left) retain and store floodwater in multifunctional urban spaces such as depressed parking areas, squares, gardens, and recreational fields. Examples from Copenhagen, Denmark: Tåsinge Plads (1), Scandiagade (2-4), and Enghavepark (5). Finally, Green roads (bottom, left) are designed to remove and retain water on smaller roads and alleys. Photos 1-4 courtesy of Troels Heien, Photo 5 courtesy of Anders Pedersen. Diagrams courtesy of the City of Copenhagen.

## 10 Opportunities for Future Research

Though recent City guidelines and vision documents are important and impactful, much more applied research is needed to reduce flood risks and build flood resilience in NYC. Several key opportunities for future research are summarized below:

## 10.1 Continue to monitor, model, and map all flood hazards, and their interactions, across NYC

Through a collaboration between the city and academic partners known as FloodNet, the City will be deploying a total of 500 ultrasonic surface flood depth sensors around the City by mid-2027 (City of New York et al., 2024). These sensors will be helpful in flood response, namely by quantifying the real-time depth and duration of different types of flooding. These sensors can also be helpful in calibrating and validating hydrologic and hydraulic models to historic flood events captured by the sensors, improving model confidence for use in simulating current and future flood hazards. Ideally, the FloodNet sensors will be accompanied by other data acquisition initiatives as described below:

- More precipitation gauges that record precipitation accumulations at subhourly temporal resolution.
  - More spatially explicit, sub-hourly precipitation data are needed to better map spatial variability in extreme precipitation and to drive real-time simulation of pluvial flood hazards. To support FRM, these observations must be accessible to the research and engineering consulting communities, and the data must be quality controlled. The integration of precipitation observations with community science programs could enhance community understanding of extreme precipitation, climate change, flooding, and FRM, ultimately leading to social transformation.
- More water level and flow gauges throughout the harbor and in local rivers, creeks, and sewers.
  - If planned along with the precipitation gauges and co-located near the FloodNet sensors (applicable for in-sewer gauges), this water level and flow data would improve the accuracy of hydrologic, hydraulic, and hydrodynamic modeling, improving our ability to simulate sewer flows, coastal and fluvial flood risks, and estuarine water quality, supporting flood preparation and ecological transformation. It could also help to design flood-risk prevention and flood protection measures in coastal or fluvial floodplains. Stevens Institute has maintained 12 water level gauges in the harbor region for the Port Authority since 2015. Data can be visualized online alongside forecasts (<http://stevens.edu/SFAS>) but aren't available for download.
  - If these gauges were maintained by governmental agencies like NOAA and USGS, working in close collaboration with NYCDEP, community scientists, fishers, and community-based organizations, they could also help advance social transformation.
- More groundwater monitoring wells instrumented with water level loggers and salinity/conductivity probes.
  - Positioned near the coasts and in topographic depressions, these data could help to improve our understanding of groundwater levels and groundwater flow directions, as well as quantify the extent saltwater intrusion into coastal artesian aquifers. In this way the data would help to design groundwater Flood-Risk prevention and Flood Protection measures.
- Digitize the geotechnical test results conducted by City as part of its Green Infrastructure Program.
  - The City has invested millions of dollars in geotechnical testing to support its evolving Green Infrastructure program. This data includes depth stratified soil texture analysis, and critical information regarding depth to groundwater and depth to bedrock. If this data were digitized, georeferenced, and made open source, it could be helpful in improving groundwater modeling throughout the city.
  - Along with the additional groundwater depth data described above, this geotechnical information could also help to identify subsurface infrastructure and subgrade spaces vulnerable to groundwater flooding, promoting Flood Preparation, and could also help to design appropriate Flood Protection measures.

The proposed new data sets could help to improve the City's ability to model pluvial, fluvial, coastal, and groundwater flood hazards. Key to this initiative is a commitment to perpetual data collection at consistent locations, facilitating retrospective analysis of historical trends and helping ensure that the most extreme flooding events are captured for model calibration. Sustained procurement of high-quality and high spatial and temporal resolution data will build a strong flood-related data repository, ensuring the City can leverage the most recent and future advancements in data-intensive technology (e.g. digital twins and AI).



It is also recommended that the City continue to integrate and develop high resolution models that can be used to simulate coastal hydrodynamics, sewer, surface, and groundwater flows in the same modeling platform. For water quality improvement purposes, NYCDEP uses an ensemble of 1D hydrologic and hydraulic models to simulate separate and combined sewer flows through its major trunk sewers. Development of the recently released Stormwater Resiliency Maps required enhancing portions of these 1D models with higher resolution representation of various elements of the drainage system. The Stormwater Resiliency Study also coupled the 1D model to a 2D model representation of the surface, enabling “rain-on-grid” simulation of pluvial flood patterns. In partnership with NYCDEP, the USGS is developing a transient numerical model of water table response to sea level rise in Queens and Staten Island. The accuracy of these early attempts at model integration could be improved by creating higher resolution data such as digital elevation models, land use cover maps, and other digital representations of the built environment. Integrated modeling can provide more detailed and site-specific results but will require significantly higher computing power. Use of cloud-based computing technology would reduce computation time and facilitate assessment of long-term historical data (requires a substantial simulation period) and near real-time warning systems (requires near-instantaneous model results to issue warnings). Cloud computing may also improve modeling of interacting, compound flood risks across integrated modeling platforms.

Recent statistical and probabilistic assessments of rain and storm surge (See Section 8.1) (Z. Chen et al., in Preparation) demonstrate that co-occurrence of these flood drivers can occur during extreme storm events. However, an important next step will be to simulate these scenarios in flood models such as those described above. Given the availability of one or more such flood models, it is recommended that an assessment of actual compound flood risk is initiated.

## **10.2 Continue to develop flood vulnerability indices like the FSHRI, which can be used to support the equitable allocation of resources for flood risk management in priority neighborhoods**

As described throughout this chapter, NYC is subject to different flood hazards, each with a unique geography of exposure. Flood hazard geographies are expected to expand in the future as the climate changes. When integrated with or overlaid on top of flood hazard maps, the recently developed Flood Susceptibility to Harm and Recovery Index is an important first step in identifying neighborhoods and populations with greatest need for resources to support FRM. The maps published in this chapter represent an initial attempt to map social vulnerability in areas exposed to flooding where specific hazards have been mapped. Future work could identify socially vulnerable neighborhoods that are exposed to a broader range of types and magnitudes of flooding, including compound flood hazards which have not yet been comprehensively modeled. Additional research could also examine vertical differences in flood vulnerability focusing on residents of multistory buildings. Although many types of flooding have historically been analyzed separately, there are many advantages to holistically analyzing all types of floods within the same modeling domain, including coastal, pluvial, fluvial, and groundwater hazards.

Along with socioeconomic factors, infrastructure and the built environment features are important contributors to flood vulnerability that should be evaluated in future flood vulnerability assessment. In this report, we provide an assessment of exposed buildings with known infrastructure vulnerabilities to flooding that could be mapped using available geospatial data. These included 1-2 unit residential buildings with basements and other subgrade spaces. However, other datasets that would support a more comprehensive assessment of infrastructure vulnerability are currently unavailable. Examples include:

- Citywide data on the elevation of critical building utilities (e.g. boilers, electrical systems)
- Citywide data on with/without wet- and dry-floodproofing features

Efforts to develop these data would provide a valuable opportunity to enhance flood vulnerability assessment research.

## **10.3 Grant decision-making power and resources to non-governmental stakeholders to develop community-driven FRM plans at the neighborhood and/or landscape scale**

In NPCC3 Foster et al (2019) reported that representatives of the city's most socially vulnerable communities desire a deeper engagement in climate planning via collaborative co-productive planning processes. However, in the United States, formal responsibility for FRM is distributed across various levels of government from the Federal government to the states, down to the City, and it can be institutionally complex for governmental stakeholders to relinquish meaningful decision-making roles to non-governmental flooding stakeholders. That said, many strategies for meaningful engagement of community stakeholders in climate decisions have been implemented in different places.

To scale-up adaptation efforts and build capacity among multiple stakeholder groups, the Urban Climate Change Research Network has hosted Urban Design Climate Workshops in Paris, Naples, Durban, and NYC (Urban Climate Change Research Network (UCCRN), 2023). In a study of alternative strategies for implementing green infrastructure in the Bronx, Wong and Montalto (2020) demonstrate how incorporation of surveyed community preferences in GI siting decisions can bring about greater long term economic and social impact from the City's GI program. In the recent NYC Climate Adaptation Scenarios workshop series (Balk et al., 2024; E. Cook et al., 2022), participants co-imagined scenarios through which NYC residents, provided adequate information and infrastructure, become resilient to extreme precipitation as they self-organize into community land trusts that manage locally generated stormwater in innovative ways.

Multi-stakeholder participation in FRM poses some challenges, such as the possibility of differences of perception and/or conflicts among different stakeholder groups, including both governmental and non-governmental entities, each of whom have different perceptions, knowledge, values, and needs; and the possibility that ideas that emerge from a deliberative process might be logistically complex to implement. Co-development of FRM plans requires investment of adequate time and resources (Almoradie et al., 2015; Maskrey et al., 2022). A broad array of stakeholders should be engaged early in the FRM planning process (Ceccato et al., 2011; Sahin & Mohamed, 2013), with open communication allowing stakeholders to express differing views and opinions, and collaborative technology such as remote conferencing tools and online collaboration platforms used throughout the process (Almoradie et al., 2015). Regular meetings, training sessions, and awareness-raising campaigns can be organized to co-develop goals, concepts, and decision-making frameworks, build capacity, reduce conflicts, and promote mutual understanding (Ceccato et al., 2011; Estoque et al., 2022; Maskrey et al., 2022; Pagano et al., 2019).

Such methods can be used to engage flooding stakeholders in key decisions regarding equity in FRM, including:

- How are community stakeholders engaged in decisions around flood prevention and protection?
- How will prevention and protection measures change access to, and cultural relevance of, flood hazard areas?
- How does flood prevention influence destination communities and receiving locations?
- Do community stakeholders have the means and capacities to maintain flood-risk reduction measures over time?
- How does prioritization of protection vary across communities?
- Which groups are most likely to experience losses or disruptions as a result of a particular kind of flood?
- How can resources be allocated to minimize transboundary risks? What additional resources are necessary to protect neighboring communities?

#### **10.4 Develop incentives, policies, and enable comprehensive transformations of the city emphasizing long-term flood resilience, sustainability, and equity, highlighting the role of NNBS**

- Flood risk prevention, protection, mitigation, and preparedness measures can help to reduce near term flood vulnerability. Due to its role in changing precipitation patterns and raising sea levels, climate change contributes to NYC's current and hazards and will further increase NYC's future flood hazards in the absence of rapidly-initiated global reductions of greenhouse gas emissions. However, as described throughout this report, flood risk is also determined by the extent to which the city's human population and its ecosystems are exposed and vulnerable to flood hazards. Exposure and vulnerability, in turn, are the result of land use, infrastructure, and social policies that dramatically transformed the ecology of NYC. Urgent, citywide transformation of these systems will be needed to manage future flood risks if global climate change is allowed to continue unabated. These transformations must include both ecological restoration and restorative social justice.

## 11 Traceable Accounts

<b>Key Message 1</b>	<p>NYC faces risks from four types of flood hazards: pluvial, fluvial, coastal, and groundwater, each with a unique geography of exposure that will expand in different ways in the future due to climate change. Identifying these four types as separate, but related, hazards is an important step in studying how they impact NYC, what FRM tools are available to address them, and where future research is needed. Climate adaptation planning must consider all four of these types of flood hazard and their potential impacts across a range of magnitudes, including very extreme events.</p>
Description of Evidence	<p>The risks associated with coastal and fluvial flooding have been evaluated through Flood Insurance Studies by the Federal Emergency Management Agency (FEMA, 2007, 2013). Projections of sea level rise with climate change and its impacts on coastal flooding have also been evaluated in previous NPCC reports (González, Ortiz, Smith, Devineni, Colle, Booth, Ravindranath, Rivera, Horton, &amp; Towey, 2019; P. Orton et al., 2019b). Projections of amplified precipitation due to climate are provided in Ortiz et al. (2024). In this assessment, we also conduct a review of the scientific literature, technical reports, and government agency databases on risks associated with pluvial and groundwater flooding.</p>
New Information and Remaining Uncertainties	<p>Significant uncertainties remain regarding the risks of associated flood hazard types that have not yet been mapped (e.g. fast-moving water, daytime and residential exposure of populations at the spatial scales relevant to flooding in New York City, and the tangible and intangible cost of flooding when it occurs.</p> <p>There are also high remaining uncertainties on how climate change will impact short-duration, intense rainfall events associated with pluvial and fluvial flooding. These uncertainties are discussed in Braneon et al (2024) and Ortiz et al (2024). In addition, observations of shallow groundwater levels in Brooklyn and Queens are available through 2012, but continuous observations along the coast are not available to allow for an analysis of trends with sea level rise. There is also very limited observational data available on aquifer properties and shallow groundwater levels in Manhattan, The Bronx, and Staten Island.</p>
Assessment of Confidence based on the Evidence	<p>Based on the available evidence and the authors' expert judgement, there is high confidence that pluvial and fluvial flooding will increase due to climate change if flood hazard mitigation efforts are not implemented. Given the trajectory and projections of sea level rise, it is virtually certain that coastal flooding will increase.</p> <p>Confidence on both the magnitude, spatial distribution, and timing of the groundwater table rise in response to sea level response – and resulting groundwater flooding in the absence of mitigation efforts – remains very low.</p>
<b>Key Message 2</b>	<p>Discussions about flooding often focus on risks within the Special Flood Hazard Areas (SFHA) mapped by the United States Federal Emergency Management Agency (FEMA). However, the FEMA SFHA maps present fluvial and coastal flood hazards only. The recently released NYC Stormwater Flood Maps represent the city's first attempt to map pluvial and some</p>



compound flood hazard with risks spread out over a much larger fraction of NYC. In this chapter, we present a preliminary assessment of pluvial and groundwater flood hazard exposure areas that can be utilized to support FRM. Additional research is necessary to develop hazard maps that represent a broader range of flooding hazards and their increase in magnitude in response to anthropogenic climate change.

Description of Evidence	The assessment of building exposure to flooding was conducted through overlay analysis of existing flood hazard (City of New York Mayor's Office of Resiliency, 2021; FEMA, 2013) and depth-to-water table (Monti, 2013) layers with geospatial datasets on the location of building footprints (NYC OTI, 2023), NYCHA Public Housing Development Map Data (NYC OTI, 2020), and a one-time data layer of Building Elevation and Subgrade Spaces in February, 2022 (NYC DCP, 2013). Analyses were conducted using Python 3 and QGIS 3.22 software.
New Information and Remaining Uncertainties	In this assessment we provide new information on the exposure of two types of buildings associated with increased vulnerability: New York City Housing Authority (NYCHA) residences and 1-2 family residential buildings with basements or other subgrade space. Uncertainties associated with each data layer used in the exposure assessment are described in their respective sources.
Assessment of Confidence based on the Evidence	<p>Confidence is high in the overall trends exhibited by the H&amp;H models used to map pluvial flooding exposure, showing that more intense rainfall will produce more flooding because the drainage system is not sized to convey the return period events that were simulated. Confidence is medium regarding the exact extents and depths of predicted flooding at the street/property-scale due to stated model resolution.</p> <p>The water table elevation map for Brooklyn and Queens used to map potential groundwater flooding exposure was developed through a synoptic survey of observational and supply wells across Long Island conducted by the USGS in 2012 (Monti et al., 2013b). Depth to water estimates were developed using this layer and a Digital Elevation Model created by NOAA and the USGS through the Disaster Relief Appropriations Act of 2013. The resulting Depth to Water Layer has a vertical accuracy of 10 feet (Como et al., 2018). While confidence in the overall spatial patterns provided by this layer is high, this layer may not represent finer-scale variation in the water table or changes that may have occurred since 2012. Groundwater data in Manhattan, The Bronx and Staten Island remains very limited, and no depth-to-water table layer is currently available for these boroughs.</p>
<b>Key Message 3</b>	Much of NYC is exposed to pluvial flooding, which occurs when the intensity of precipitation exceeds the infiltration capacity of the soil and the hydraulic capacity of the sewer system. These conditions often occur during cloudbursts, short-duration periods of intense rainfall that can be embedded within large storm systems or occur as individual, hard-to-forecast thunderstorms. Intense rainfall has already been observed to have become more frequent in NYC since the mid-20th century and are projected to further intensify and occur more frequently with unmitigated climate change. Despite the increasing risk, pluvial flood hazards remain poorly understood. The NYC Floodnet project is beginning to collect observations of flooding when it occurs, but more monitoring of rainfall, in-sewer flows, and flooding, along with Hydrologic and Hydraulic (H&H) modeling of pluvial flooding processes and impacts are needed.
Description of Evidence	In this assessment we utilize the outputs of H&H modeling (City of New York Mayor's Office of Resiliency, 2021) to evaluate the areal extent of potential



pluvial flooding in New York City during moderate and extreme rain events. 311 service requests were used to map the locations across the city where community members have been impacted by street flooding during intense rain events. Narrative data provided through the National Center for Environmental Information's (NCEI) Storm Events Database and *Storm Data* publication also provide insight on severe impacts of historical pluvial flooding across the city and their associated meteorological conditions.

Future precipitation projections are based on the mean citywide delta change factors derived from an ensemble of climate models using the LOCA2 downscaling method for SSP245 (mid-century greenhouse emissions reduction) and SSP585 (unmitigated climate change). These analyses are described in McPhearson et al. (2024).

---

New Information and Remaining Uncertainties

In this assessment, we provide a literature review on impactful pluvial flooding in NYC, and an exposure assessment of vulnerable buildings to pluvial flooding. While there are multiple mechanisms through which climate change can increase the intensity of cloudburst events in NYC, these processes remain poorly represented in global-scale numerical models used to develop climate projections.

We also provide a detailed case study of a cloudburst associated with the remnants of Hurricane Ida in 2021, which resulted in 13 direct fatalities, severe disruptions, and extensive damage in many parts of the city. This case study includes a literature review, an assessment of rainfall rates and return intervals associated with this event, and mapping of 311 service requests of street flooding and other flood-associated complaints. Attribution studies focused on this, and similar events, are needed to determine the role that climate change may have had in setting it up and whether more events of similar intensity and spatial extent will occur in NYC in the future.

Significant uncertainties remain in quantitative projections for extreme precipitation since the processes associated with short-duration intense precipitation events remain poorly represented in the global-scale numerical models used to develop climate projections (Fowler, Ali, Allan, Ban, Barbero, Berg, Blenkinsop, Cabi, Chan, Dale, et al., 2021). Significant uncertainties also remain regarding rainfall intensity and areal extent thresholds for pluvial flooding and with hazards associated with pluvial flooding such as fast-flowing water and exposure to pathogens.

---

Assessment of Confidence based on the Evidence

Based on the available evidence in the scientific literature and the authors' expert judgement, there is high confidence that short-duration, intense precipitation events will continue to increase in frequency and magnitude in the absence of rapid mitigation of global climate change. As a result, pluvial flooding will occur more frequently due to climate change if flood hazard mitigation efforts are not implemented.

At the same time, there is only medium confidence in the quantitative projections of these increases, due to remaining uncertainties in the representation of short-duration precipitation processes in global climate models.

---

Key Message 4

In NYC, fluvial flood risks are spatially localized to areas of the Bronx and Staten Island where surface stream channels remain. In the remainder of the city, historical surface streams were filled and replaced, with their flow routed to the sewer system. As a result, fluvial flood hazard has largely been replaced by pluvial flood hazard in most of the city. Both fluvial and pluvial flood hazards will increase due to climate-change driven intensification of precipitation and elevation of sea level. While traditional floodplain management can be an effective strategy in reducing exposure to fluvial

floods, a broader, watershed-scale approach that retains, detains, and redirects stormwater is needed to jointly manage pluvial and fluvial flood risks.

Description of Evidence	The locations of remaining inland streams and rivers in New York City were assessed in the FEMA 2013 Flood Insurance Study (FEMA, 2013).
New Information and Remaining Uncertainties	There are high remaining uncertainties on how climate change will impact short-duration, intense rainfall events associated with pluvial and fluvial flooding. These uncertainties are discussed in Braneon et al (2024) and Ortiz et al (2024).
Assessment of Confidence based on the Evidence	Based on the available evidence and the authors' expert judgement, there is high confidence that fluvial flooding will increase along with pluvial flooding due to climate change if flood hazard mitigation efforts are not implemented.
<b>Key Message 5</b>	Current and future coastal flood risks are caused by high storm tides, rising sea levels, and historical development on landfill over tidal marshes and nearshore areas. In Jamaica Bay, tides and storm surges have also been significantly elevated by historical dredging and landfilling, worsening chronic and extreme flooding. On December 23rd, 2022, a major flood event around Jamaica Bay was caused, in part, by dredging that has led to amplified storm tides which were nearly a foot higher there than elsewhere in the harbor. Further improvement of our understanding of future coastal flood hazard is possible through downscaling of climate model data and modeling of multiple compounding flood drivers.
Description of Evidence	Recent research has demonstrated that Jamaica Bay landscape changes have made tides larger and worsened storm tides, playing a similar role to past sea level rise in worsening flooding (P. M. Orton, Sanderson, et al., 2020; Pareja-Roman et al., 2023).
New Information and Remaining Uncertainties	Important remaining uncertainties for coastal flood hazard are baseline storm climatology and climate change effects on storms. Also, a case is made (Section 6.4) that coastal storm surge models used for risk assessment and forecasting may have inaccuracies due to the challenge of simulating flow through the narrow and sharply curving areas of East River.
Assessment of Confidence based on the Evidence	There is very high confidence that sea level rise will continue to worsen monthly and extreme coastal flooding, but large uncertainties remain in the exact amounts, as reflected in NPCC projections. Confidence is high that landscape change has worsened flooding for Jamaica Bay, given that the finding is based both on contrasting models and observations from the 1870s and modern era. Confidence is low in the effects of future storm changes on coastal flooding.
<b>Key Message 6</b>	Many NYC neighborhoods have very shallow groundwater tables and already experience groundwater flooding. These areas include parts of the city that were developed when groundwater levels were substantially lower due to historical pumping of groundwater for municipal water supply. Groundwater flood risk has the potential to be particularly significant in NYC because of the prevalence of subterranean infrastructure. Groundwater flood hazards have not yet been assessed citywide, but preliminary efforts are underway. Sea level rise may cause groundwater levels to rise, resulting in inflow and infiltration of groundwater into sewer pipes and subterranean spaces and inundation of topographically vulnerable locations from below. Improved characterization of spatially heterogenous aquifer hydraulic properties and sustained monitoring of ground water levels will be necessary to develop projections for future groundwater flooding.



Description of Evidence	Observations of shallow groundwater levels in Brooklyn and Queens are available through 2012, but continuous observations along the coast are not available to allow for an analysis of trends with sea level rise. There is also very limited observational data available on aquifer properties and shallow groundwater levels in Manhattan, The Bronx, and Staten Island so exposure assessment could not be conducted for these boroughs.
New Information and Remaining Uncertainties	There are remaining uncertainties about the rate of sea level rise and substantial remaining uncertainties associated with the hydrogeology of NYC's complex subsurface, both which will determine the transient response of the groundwater table to sea level rise. There are also remaining uncertainties associated with the rate and distribution of groundwater pumping to dewater subgrade spaces and tunnels and its potential impacts on the water table and receiving water quality.
Assessment of Confidence based on the Evidence	Confidence on both the magnitude, spatial distribution, and timing of the groundwater table rise in response to sea level response – and resulting groundwater flooding in the absence of mitigation efforts – remains very low.
<b>Key Message 7</b>	Climate change is increasing the frequency of extreme precipitation events and elevating sea levels, increasing the likelihood of compounding of either one of these flood drivers by the other. In addition, tropical and post-tropical cyclones (TCs) have caused severe storm surges and extreme rainfall to occur simultaneously. While assessment is limited by the small number of historical TC events, the limited evidence suggests that TCs can cause low-probability, dangerous compound flooding. Given the importance of TCs and limited historical data, a deeper understanding of compound flood hazard likely requires detailed modeling and downscaling to simulate such storms under the present and future climate.
Description of Evidence	Sea levels have risen 1.5 feet since 1860 and are accelerating, with projections of 25-65 inches by 2100 (~2 to ~5.5 feet; 80% confidence range (Braneon et al., 2024). Significant increases have been observed in the frequency of extreme (95 <sup>th</sup> and 99 <sup>th</sup> percentile) rain events and in the magnitude of all rain events in the New York City Metropolitan Area since the mid 20 <sup>th</sup> century (Braneon et al., 2024). Further increases are projected through the 21 <sup>st</sup> Century (Braneon et al., 2024) These separate changes alone can increase the potential for compound flooding.
New Information and Remaining Uncertainties	<p>Analyses of historical data under the Climate VIA project (Section 8) have quantified the baseline present-day flood hazard from co-occurrence of rain and storm surge. The research focused on simultaneous and near-simultaneous rain and storm surge through analysis of hourly historical data because NYC is located on several small, heavily urbanized watersheds, where timescales of drainage are short, and rain and surge must be nearly simultaneous to cause compounding. The results reveal non-zero correlations between rain and storm surge and that there is a higher probability of one variable being extreme when the other is extreme. For all storm type data merged together, rain and surge have a low, but non-zero rank correlation. However, for TC data alone, their correlation can be high. In addition, when one of the two flood drivers is extreme (the “primary” driver), the magnitude of the secondary flood driver during TCs is much higher than for other storm types.</p> <p>More comprehensive research on all flood hazard types, including groundwater and Bronx River-fluvial compound flooding is needed. While most research to date has focused on less-frequent, extreme compound events, more research on the chronic flooding that will result from more-frequently occurring high tides and the infiltration of groundwater into storm drains sewers is needed for NYC. Also, a critical next step will be compound flood modeling and analyses of street flood observations alongside the results</p>



of statistical assessments like those summarized above, to translate these data into an understanding of actual on-the-ground impacts; two drivers can co-occur, but their combined flood depth is often less than their sum.

Assessment of Confidence based on the Evidence	The limited historical record of TCs affecting NYC limits our confidence in NYC's potential for joint occurrences of heavy or extreme rain and surge, which we understand with medium confidence. We have high confidence that there will be increased chronic compound flooding from rainfall and higher sea levels unless flood mitigation efforts are undertaken.
<b>Key Message 8</b>	NYC's NNBS provide many valuable ecosystem services, including critical water regulation services that can play a role in FRM. However, many of these systems are themselves vulnerable to different flood hazards, especially along the coast. Research into how different types of NNBS are impacted by flood/storm surge events, hydroperiod changes, rising water tables and salinization is needed to better evaluate future changes in ecosystem services. Opportunities for designing NNBS to mitigate the impacts of various flood hazards need to be further explored.
Description of Evidence	Intensive development of NYC has significantly reduced the area and functionality of its natural systems, replacing them with developed surfaces. Research into the impact of climate change on natural systems is underway in NYC and throughout the region but more work is needed to examine how specific changes are impacting specific systems and what can be done to mitigate negative impacts.
New Information and Remaining Uncertainties	More research is needed to understand how NNBS respond to climatic changes including changes in precipitation patterns, temperature, and tidal flood frequency.
Assessment of Confidence based on the Evidence	We have great confidence that climate change and historical development has negatively impacted natural systems.
<b>Key Message 9</b>	Comprehensive FRM plans must be designed to address the full range of flood hazards faced by individual communities. Planning must begin with participatory decision-making processes that establish neighborhood-specific levels of acceptable future flood risk. To reduce risks from current levels, FRM tailored to each community will include combinations of structural and non-structural approaches, including NNBS, that are implemented in ways that reduce social vulnerability and are also synergistic with community histories, needs, and goals.
Description of Evidence	A large body of research has been published recently on FRM locally, nationally, and internationally. This research includes peer-reviewed journal papers, grey literature, and practitioner reports focusing on the physical effectiveness of these responses and the logistical, governance, and socioeconomic factors that constrain their implementation.
New Information and Remaining Uncertainties	Much of the research on FRM is nascent. Very few long-term studies exist.
Assessment of Confidence based on the Evidence	We are very confident that successful FRM strategies will both respond to the unique set of local flood risks and be synergistic with community needs.



## 12 Sustained Assessment

NYC's flood risks vary across the four types of flooding presented herein and in the ways in which they may compound. Moreover, these risks require watershed-scale understanding of stormwater for pluvial and fluvial flood risks, improved characterization of, and monitoring of groundwater levels and potential for future groundwater flooding, and more holistic approaches to capture coastal flooding impacts alongside more comprehensive understanding of existing systemic adaptive capacities.

While NYC's NNBS provide many valuable ecosystem services, they too are at risk, especially along the coast, and so researching how different types of NNBS are impacted by flood/storm surge events, hydroperiod changes, rising water tables and salinization is needed to better evaluate ecosystem services. Given increasing opportunities to work with NNBS to reduce risks while improving NY's public realm, understanding how such systems might adapt given expected climate changes and how to build into such systems more adaptive capacity remains an ongoing area of research.

Beyond the technical analyses needed, sustained assessment offers New Yorkers the opportunity to deepen their understanding of NYC's flood risks while simultaneously improving individual and organizational capacities to address those risks. While technical experts continue risk assessments, broader collaborations between governmental, institutional, business, and community-based organizations could help NYers to better understand these risks and the implications to the households and economies of New York.

Future assessments could consider how recently launched activities, such as Rainproof NY or the Climate Knowledge Exchange Flood Series, improve community awareness of the ability to cope with, and the opportunities to adapt to, these risks. Moreover, these could be further leveraged to couple technical analyses and community preparedness in mutually supportive ways wherein community readiness becomes a recognized criterion, particularly for communities where planned investments in flood risk reduction measures are underway or are in planning.

Recognizing that sustained assessment sets the stage for ongoing dialogue within these communities and across various groups of stakeholders while also emphasizing shared growth, setting agenda specific to sustained assessment and NYC's flood risks could enable a whole of community approach, similar to the approaches well underway in Copenhagen and Amsterdam.



## 13 References

- Abdelhafez, M. A., Ellingwood, B., & Mahmoud, H. (2022). Hidden costs to building foundations due to sea level rise in a changing climate. *Scientific Reports*, 12(1), 14020.
- Abdel-Mooty, M. N., El-Dakhkhni, W., & Coulibaly, P. (2022). Data-Driven Community Flood Resilience Prediction. *Water*, 14(13), 2120. <https://doi.org/10.3390/w14132120>
- Abdulkareem, M., & Elkadi, H. (2018). From engineering to evolutionary, an overarching approach in identifying the resilience of urban design to flood. *International Journal of Disaster Risk Reduction*, 28, 176–190.
- Abualfaraj, N., Cataldo, J., Elboroloso, Y., Fagan, D., Woerdeman, S., Carson, T., & Montalto, F. (2018). Monitoring and Modeling the Long-Term Rainfall-Runoff Response of the Jacob K. Javits Center Green Roof. *Water*, 10(11), 1494. <https://doi.org/10.3390/w10111494>
- Agonafir, C., Lakhankar, T., Khanbilvardi, R., Krakauer, N., Radell, D., & Devineni, N. (2022). A machine learning approach to evaluate the spatial variability of New York City's 311 street flooding complaints. *Computers, Environment and Urban Systems*, 97, 101854. <https://doi.org/10.1016/j.compenvurbsys.2022.101854>
- Agonafir, C., Lakhankar, T., Khanbilvardi, R., Krakauer, N., Radell, D., & Devineni, N. (2023). A review of recent advances in urban flood research. *Water Security*, 19, 100141.
- Agonafir, C., Pabon, A. R., Lakhankar, T., Khanbilvardi, R., & Devineni, N. (2022). Understanding New York City street flooding through 311 complaints. *Journal of Hydrology*, 605, 127300. <https://doi.org/10.1016/j.jhydrol.2021.127300>
- Ahern, M., Kovats, R. S., Wilkinson, P., Few, R., & Matthies, F. (2005). Global health impacts of floods: Epidemiologic evidence. *Epidemiologic Reviews*, 27(1), 36–46.
- Ajibade, I., Sullivan, M., Lower, C., Yarina, L., & Reilly, A. (2022). Are managed retreat programs successful and just? A global mapping of success typologies, justice dimensions, and trade-offs. *Global Environmental Change*, 76, 102576. <https://doi.org/10.1016/j.gloenvcha.2022.102576>
- Alizadehtazi, B., DiGiovanni, K., Foti, R., Morin, T., Shetty, N. H., Montalto, F. A., & Gurian, P. L. (2016). Comparison of Observed Infiltration Rates of Different Permeable Urban Surfaces Using a Cornell Sprinkle Infiltrometer. *Journal of Hydrologic Engineering*, 21(7), 06016003. [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001374](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001374)
- Alizadehtazi, B., Gurian, P. L., & Montalto, F. A. (2020). Impact of successive rainfall events on the dynamic relationship between vegetation canopies, infiltration, and recharge in engineered urban green infrastructure systems. *Ecohydrology*, 13(2), e2185. <https://doi.org/10.1002/eco.2185>
- Allen, J. L., & Lendemer, J. C. (2016). Quantifying the impacts of sea-level rise on coastal biodiversity: A case study on lichens in the mid-Atlantic Coast of eastern North America. *Biological Conservation*, 202, 119–126. <https://doi.org/10.1016/j.biocon.2016.08.031>
- Alley, R. B., Emanuel, K. A., & Zhang, F. (2019). Advances in weather prediction. *Science*, 363(6425), 342–344.
- Almoradie, A., Cortes, V. J., & Jonoski, A. (2015). Web-based stakeholder collaboration in flood risk management. *Journal of Flood Risk Management*, 8(1), 19–38. <https://doi.org/10.1111/jfr3.12076>
- Andradóttir, H. Ó., Arnardóttir, A. R., & Zaqout, T. (2021). Rain on snow induced urban floods in cold maritime climate: Risk, indicators and trends. *Hydrological Processes*, 35(9), e14298.
- Anguelovski, I., Connolly, J. J. T., Cole, H., Garcia-Lamarca, M., Triguero-Mas, M., Baró, F., Martin, N., Conesa, D., Shokry, G., del Pulgar, C. P., Ramos, L. A., Matheney, A., Gallez, E., Oscilowicz, E., Mániz, J. L., Sarzo, B., Beltrán, M. A., & Minaya, J. M. (2022). Green gentrification in European and North American cities. *Nature Communications*, 13(1), 3816. <https://doi.org/10.1038/s41467-022-31572-1>
- Atkins. (2015). *Flood loss avoidance benefits of green infrastructure for stormwater management*. <https://www.epa.gov/sites/default/files/2016-05/documents/flood-avoidance-green-infrastructure-12-14-2015.pdf>
- AutoDesk. (2023). *Digital Software for Water Professionals*. Innovyze. <https://innovyze.com/>
- Ayyad, M., Orton, P. M., El Safty, H., Chen, Z., & Hajj, M. R. (2022). Ensemble forecast for storm tide and resurgence from Tropical Cyclone Isaias. *Weather and Climate Extremes*, 38, 100504. <https://doi.org/10.1016/j.wace.2022.100504>
- Baja, K. (2021). Rethinking process and reframing language for climate-induced relocation. In *Global Views on*



- Climate Relocation and Social Justice: Navigating Retreat* (pp. 19–33). Routledge.
- Balk, D., McPhearson, T., Cook, E. M., Knowlton, K., Maher, N., Marcotullio, P., Matte, T. D., Moss, R., Ortiz, L. E., Towers, J., Ventrella, J., & Wagner, G. (2024). NPCC4: Concepts and Tools for Envisioning New York City's Futures (pre-publication draft). *Annals of New York Academy of Sciences*.
- Beck, K. (2019). Trust and the built environment in New York City's public housing. *Sociological Perspectives*, 62(1), 120–138.
- Befus, K. M., Barnard, P. L., Hoover, D. J., Finzi Hart, J. A., & Voss, C. I. (2020). Increasing threat of coastal groundwater hazards from sea-level rise in California. *Nature Climate Change*, 10(10), 946–952.
- Benito, G., & Hudson, P. F. (2010). Flood hazards: The context of fluvial geomorphology. *Geomorphological Hazards and Disaster Prevention*, 111–128.
- Benotti, M. J., Abbene, I., & Terracciano, S. A. (2007). *Nitrogen Loading in Jamaica Bay, Long Island, New York: Predevelopment to 2005* (Report 2007–5051; Scientific Investigations Report). USGS Publications Warehouse. <http://pubs.er.usgs.gov/publication/sir20075051>
- Binder, S. B., & Greer, A. (2016). The Devil Is in the Details: Linking Home Buyout Policy, Practice, and Experience After Hurricane Sandy. *Politics and Governance*, 4(4), 97–106. <https://doi.org/10.17645/pag.v4i4.738>
- Bixler, R. P., Paul, S., Jones, J., Preisser, M., & Passalacqua, P. (2021). Unpacking adaptive capacity to flooding in urban environments: Social capital, social vulnerability, and risk perception. *Frontiers in Water*, 3, 728730.
- Black, K. J., & Richards, M. (2020). Eco-gentrification and who benefits from urban green amenities: NYC's high Line. *Landscape & Urban Planning, Elsevier*.
- Bonneau, J., Fletcher, T. D., Costelloe, J. F., & Burns, M. J. (2017). Stormwater infiltration and the 'urban karst'—A review. *Journal of Hydrology*, 552, 141–150.
- Bosserelle, A. L., Morgan, L. K., & Hughes, M. W. (2022). Groundwater rise and associated flooding in coastal settlements due to sea-level rise: A review of processes and methods. *Earth's Future*, 10(7), e2021EF002580.
- Brandon, C. M., Woodruff, J. D., Donnelly, J. P., & Sullivan, R. M. (2014). How Unique was Hurricane Sandy? Sedimentary Reconstructions of Extreme Flooding from New York Harbor. *Scientific Reports*, 4(1), 7366. <https://doi.org/10.1038/srep07366>
- Braneon, C., Ortiz, L., Bader, D., Devineni, N., Orton, P., Rosenzweig, B., McPhearson, T., Smalls-Mantey, L., Gornitz, V., Mayo, T., Kadam, S., Sheerazi, H., Glenn, E., Yoon, L., Derras-Chouk, A., Towers, J., Leichenko, R., Balk, D., Marcotullio, P., & Horton, R. (2024). NPCC4: NYC Climate Risk Information 2022: Observations and Projections (pre-publication draft). *Annals of the New York Academy of Sciences*.
- Bridges, T., King, J., Simm, J., Beck, M., Collins, G., Lodder, Q., & Mohan, R. (2021). *Overview: International Guidelines on Natural and Nature-Based Features for Flood Risk Management*. US Army Corps of Engineers: Engineer Research and Development Center. <https://doi.org/10.21079/11681/41945>
- Burke, P. C., Lamers, A., Carbin, G., Erickson, M. J., Klein, M., Chenard, M., McNatt, J., & Wood, L. (2023). The Excessive Rainfall Outlook at the Weather Prediction Center: Operational Definition, Construction, and Real-Time Collaboration. *Bulletin of the American Meteorological Society*, 104(3), E542–E562.
- Buxton, H. T., & Shernoff, P. K. (1999). Ground-Water Resources of Kings and Queens Counties, Long Island, New York. United States Geologic Survey. *Water-Supply Paper*, 2498.
- Buxton, H. T., & Smolensky, D. A. (1999). Simulation of the effects of development of the ground-water flow system of Long Island, New York. In *Water-Resources Investigations Report* (98–4069). U.S. Geological Survey. <https://doi.org/10.3133/wri984069>
- Calvin, E., Freudenberg, R., & McCoy, S. (2018). *The New Shoreline: Integrating Community and Ecological Resilience Around Tidal Wetlands*. Regional Plan Association. <https://s3.us-east-1.amazonaws.com/rpa-org/pdfs/RPA-New-Shoreline-Report.pdf>
- Cangialosi, J. P., Blake, E., DeMaria, M., Penny, A., Latta, A., Rappaport, E., & Tallapragada, V. (2020). Recent progress in tropical cyclone intensity forecasting at the National Hurricane Center. *Weather and Forecasting*, 35(5), 1913–1922.
- Capurso, W., Simonson, A., Noll, M., Busciolano, R., & Finkelstein, J. (2023). *High-Water Marks in the Five Boroughs of New York City from Flash Flooding Caused by the Remnants of Hurricane Ida, September 1, 2021* [US Geological Survey Data Release]. <https://doi.org/10.5066/P9OMBJPQ>



- Carey, J. C., Moran, S. B., Kelly, R. P., Kolker, A. S., & Fulweiler, R. W. (2017). The Declining Role of Organic Matter in New England Salt Marshes. *Estuaries and Coasts*, 40(3), 626–639. <https://doi.org/10.1007/s12237-015-9971-1>
- Carpenter, S., Walker, B., Anderies, J. M., & Abel, N. (2001). From metaphor to measurement: Resilience of what to what? *Ecosystems*, 4, 765–781.
- Castagno, K. A., Ganju, N. K., Beck, M. W., Bowden, A. A., & Scyphers, S. B. (2022). How Much Marsh Restoration Is Enough to Deliver Wave Attenuation Coastal Protection Benefits? *Frontiers in Marine Science*, 8, 756670. <https://doi.org/10.3389/fmars.2021.756670>
- Castagno, K. A., Jiménez-Robles, A. M., Donnelly, J. P., Wiberg, P. L., Fenster, M. S., & Fagherazzi, S. (2018). Intense Storms Increase the Stability of Tidal Bays. *Geophysical Research Letters*, 45(11), 5491–5500. <https://doi.org/10.1029/2018GL078208>
- Catalano De Sousa, M. R., Montalto, F. A., & Gurian, P. (2016). Evaluating Green Infrastructure Stormwater Capture Performance under Extreme Precipitation. *Journal of Extreme Events*, 03(02), 1650006. <https://doi.org/10.1142/S2345737616500068>
- Cea, L., & Costabile, P. (2022). Flood Risk in Urban Areas: Modelling, Management and Adaptation to Climate Change. A Review. *Hydrology*, 9(3), 50. <https://doi.org/10.3390/hydrology9030050>
- Ceccato, L., Giannini, V., & Giupponi, C. (2011). Participatory assessment of adaptation strategies to flood risk in the Upper Brahmaputra and Danube river basins. *Environmental Science & Policy*, 14(8), 1163–1174. <https://doi.org/10.1016/j.envsci.2011.05.016>
- Chang, H.-S., Su, Q., & Chen, Y. S. (2021). Establish an assessment framework for risk and investment under climate change from the perspective of climate justice. *Environmental Science and Pollution Research*, 28, 66435–66447.
- Chang, S. W., Clement, T. P., Simpson, M. J., & Lee, K.-K. (2011). Does sea-level rise have an impact on saltwater intrusion? *Advances in Water Resources*, 34, 1283–1291.
- Chant, R. J., Ralston, D. K., Ganju, N. K., Pianca, C., Simonson, A. E., & Cartwright, R. A. (2021). Sediment Budget Estimates for a Highly Impacted Embayment with Extensive Wetland Loss. *Estuaries and Coasts*, 44(3), 608–626. <https://doi.org/10.1007/s12237-020-00784-3>
- Chen, Y., Paschalis, A., Kendon, E., Kim, D., & Onof, C. (2021). Changing spatial structure of summer heavy rainfall, using convection-permitting ensemble. *Geophysical Research Letters*, 48(3), e2020GL090903.
- Chen, Z., Orton, P., Wahl, T., Booth, J., & Degaetano, A. (in Preparation). *Influence of Storm Type on Compound Flood Hazard of an Urban Pluvial Environment [Manuscript in Preparation]*. Climate Vulnerability, Impact, and Adaptation Analysis (VIA).
- Chester, M. V., Markolf, S., & Allenby, B. (2019). Infrastructure and the environment in the Anthropocene. *Journal of Industrial Ecology*, 23(5), 1006–1015. <https://doi.org/10.1111/jiec.12848>
- Cialone, M. A., Massey, T. C., Anderson, M. E., Grzegorzewski, A. S., Jensen, R. E., Cialone, A., Mark, D. J., Pevey, K. C., Gunkel, B. L., McAlpin, T. O., Nadal-Caraballo, N. C., Melby, J. A., & Ratcliff, J. J. (2015). *North Atlantic Coast Comprehensive Study (NACCS) Coastal Storm Model Simulations: Waves and Water Levels (TR-15-14)*. U.S. Army Corps of Engineers Engineer Research and Development Center. <https://apps.dtic.mil/sti/pdfs/ADA621343.pdf>
- City of Copenhagen. (2012). *Cloudburst Management Plan*. Technical and Environmental Administration. [http://en.klimatilpasning.dk/media/665626/cph\\_-\\_cloudburst\\_management\\_plan.pdf](http://en.klimatilpasning.dk/media/665626/cph_-_cloudburst_management_plan.pdf)
- City of New York Department of City Planning. (2021). *New York City Comprehensive Waterfront Plan 2021*. New York City Department of City Planning. [https://www.nyc.gov/assets/planning/download/pdf/plans-studies/comprehensive-waterfront-plan/nyc\\_comprehensive\\_waterfront\\_plan\\_lo-res.pdf](https://www.nyc.gov/assets/planning/download/pdf/plans-studies/comprehensive-waterfront-plan/nyc_comprehensive_waterfront_plan_lo-res.pdf)
- City of New York Department of City Planning. (2022). *Primary Land Use Tax Lot Output—Map (MapPLUTO)* [ESRI Shapefile]. NYC Open Data. <https://data.cityofnewyork.us/City-Government/Primary-Land-Use-Tax-Lot-Output-Map-MapPLUTO-/f888-ni5f>
- City of New York Department of Environmental Protection. (2023, January). *Cloudburst Management—NYC DEP*. <https://www.nyc.gov/site/dep/environment/cloudburst.page>
- City of New York Mayor's Office of Climate & Environmental Justice. (2022a). *Climate Resiliency Design Guidelines V4.1*. City of New York. <https://www.nyc.gov/assets/sustainability/downloads/pdf/publications/CRDG-4-1-May-2022.pdf>



- City of New York Mayor's Office of Climate & Environmental Justice. (2022b). *Climate Strong Communities*. NYC Mayor's Office of Climate and Environmental Justice. <https://climate.cityofnewyork.us/initiatives/climate-strong-communities/>
- City of New York Mayor's Office of Climate Resiliency. (2021). *Neighborhood Coastal Flood Protection Project Planning Guidance 2021 (Version 1.0)*. City of New York Mayor's Office of Climate Resiliency. <https://www.nyc.gov/assets/orr/pdf/publications/Coastal-Protection-Guidance.pdf>
- City of New York Mayor's Office of Resiliency. (2021). *New York City Stormwater Resiliency Plan: Helping New Yorkers understand and manage vulnerabilities from extreme rain* (p. 23). City of New York. <https://www.nyc.gov/assets/orr/pdf/publications/stormwater-resiliency-plan.pdf>
- City of New York, New York University, & The City University of New York. (2024). *FloodNet*. <https://www.floodnet.nyc/methodology/>
- City of New York Office of Management and Budget. (2023). *CDBG-DR Action Plan for The Remnants of Hurricane Ida: Substantial Amendment 1* [HUD Submission Version]. Office of Management and Budget (OMB) of the City of New York. [https://www.nyc.gov/assets/cdbgdr/documents/amendments/Ida\\_Amendments/2\\_NYC\\_Hurricane\\_Ida\\_Action\\_Plan\\_SA1\\_HUD\\_Approved\\_\(8.8.23\).pdf](https://www.nyc.gov/assets/cdbgdr/documents/amendments/Ida_Amendments/2_NYC_Hurricane_Ida_Action_Plan_SA1_HUD_Approved_(8.8.23).pdf)
- City of New York Office of the Deputy Mayor for Administration. (2021). *The New Normal: Combating Storm-Related Extreme Weather In New York City*. NYC Extreme Weather Response Task Force. <https://www1.nyc.gov/assets/orr/pdf/publications/WeatherReport.pdf>
- City of New York Office of the Mayor. (2013). *PlaNYC: A Stronger, More Resilient New York (PlaNYC)*. City of New York. <https://www1.nyc.gov/site/sirr/report/report.page>
- City of New York Office of the Mayor. (2023). *PlaNYC: Getting Sustainability Done (PlaNYC)*. City of New York. <https://s-media.nyc.gov/agencies/mocej/PlaNYC-2023-Full-Report.pdf>
- Coda, S., Tessitore, S., Di Martire, D., De Vita, P., & Allocca, V. (2019). *Environmental effects of the groundwater rebound in the eastern plain of Naples (Italy)*.
- Colle, B. A., Rojowsky, K., & Buonaito, F. (2010). New York City Storm Surges: Climatology and an Analysis of the Wind and Cyclone Evolution. *Journal of Applied Meteorology and Climatology*, 49(1), 85–100. <https://doi.org/10.1175/2009JAMC2189.1>
- Como, M. D., Finkelstein, J. S., Rivera, S. L., Monti, J. Jr., & Busciolano, R. (2018). *Water-Table and Potentiometric-Surface Altitudes in the Upper Glacial, Magothy, and Lloyd Aquifers of Long Island, New York, April-May 2016* (Pamphlet U.S. Geological Survey Scientific Investigations Map 3398; p. sheets, scale 1:125,000, 5-). United States Geological Survey. <https://doi.org/10.3133/sim3398>
- Cook, E., Ventrella, J., McPhearson, T., Parris, A., Tier, M., Muñoz-Erickson, T., Iwaniec, D., Mannetti, L., Green, C., & Tagtachian, D. (2022). *New York City Climate Adaptation Scenarios for 2100: Exploring Alternative, Positive Visions for a Resilient Future*. Urban Systems Lab. The New School. <https://urbansystemslab.com/nycadaptationfutures>
- Cook, L. M., McGinnis, S., & Samaras, C. (2020). The effect of modeling choices on updating intensity-duration-frequency curves and stormwater infrastructure designs for climate change. *Climatic Change*, 1–20.
- Corada-Fernández, C., Candela, L., Torres-Fuentes, N., Pintado-Herrera, M. G., Paniw, M., & González-Mazo, E. (2017). Effects of extreme rainfall events on the distribution of selected emerging contaminants in surface and groundwater: The Guadalete River basin (SW, Spain). *Science of The Total Environment*, 605–606, 770–783. <https://doi.org/10.1016/j.scitotenv.2017.06.049>
- Council of the European Union. (2007). *Directive 2007/60/EC of the European Parliament and of the Council of 23 October 2007 on the assessment and management of flood risks*. Journal of the European Union. <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32007L0060>
- Courtney, S., Montalto, F., & Watson, E. B. (2023). Climate and Vegetation Change in a Coastal Marsh: Two Snapshots of Groundwater Dynamics and Tidal Flooding at Piermont Marsh, NY Spanning 20 Years. *Wetlands*, 44(1), 8. <https://doi.org/10.1007/s13157-023-01761-9>
- Crichton, D. (1999). The risk triangle. *Natural Disaster Management*, 102(3).
- Cui, D., Liang, S., Wang, D., & Liu, Z. (2021). A 1 km global dataset of historical (1979–2013) and future (2020–2100) Köppen–Geiger climate classification and bioclimatic variables. *Earth System Science Data Discussions*, 13(11), 5087–5114.



- de Man, H., van den Berg, H. H. J. L., Leenen, E. J. T. M., Schijven, J. F., Schets, F. M., van der Vliet, J. C., van Knapen, F., & de Roda Husman, A. M. (2014). Quantitative assessment of infection risk from exposure to waterborne pathogens in urban floodwater. *Water Research*, *48*, 90–99. <https://doi.org/10.1016/j.watres.2013.09.022>
- Deegan, L. A., Johnson, D. S., Warren, R. S., Peterson, B. J., Fleeger, J. W., Fagherazzi, S., & Wollheim, W. M. (2012). Coastal eutrophication as a driver of salt marsh loss. *Nature*, *490*(7420), 388–392.
- Depietri, Y., & McPhearson, T. (2017). Integrating the grey, green, and blue in cities: Nature-based solutions for climate change adaptation and risk reduction. *Nature-Based Solutions to Climate Change Adaptation in Urban Areas: Linkages between Science, Policy and Practice*, 91–109.
- Dmuchowski, W., Brągoszewska, P., Gozdowski, D., Baczevska-Dąbrowska, A. H., Chojnacki, T., Jozwiak, A., Swieżewska, E., Suwara, I., & Gworek, B. (2022). Strategies of urban trees for mitigating salt stress: A case study of eight plant species. *Trees*, *36*(3), 899–914. <https://doi.org/10.1007/s00468-020-02044-0>
- Dundon, L. A., & Abkowitz, M. (2021). Climate-induced managed retreat in the U.S.: A review of current research. *Climate Risk Management*, *33*, 100337. <https://doi.org/10.1016/j.crm.2021.100337>
- Editorial Team. (2019, December 5). *Nuove regole contro l'acqua alta: Elettropompe e impianto elettrico rialzato*. VeneziaToday. <https://www.veneziatoday.it/attualita/pompe-impianti-elettrici-piani-terra-acqua-alta.html>
- EJNYC Mapping Tool. (n.d.). Retrieved April 8, 2024, from <https://experience.arcgis.com/experience/6a3da7b920f248af961554bdf01d668b/page/Data-Explorer/>
- Estoque, R. C., Ooba, M., Togawa, T., Yoshioka, A., Gomi, K., Nakamura, S., Tsuji, T., Hijioaka, Y., Watanabe, M., & Kitahashi, M. (2022). Climate impact chains for envisaging climate risks, vulnerabilities, and adaptation issues. *Regional Environmental Change*, *22*(4), 133. <https://doi.org/10.1007/s10113-022-01982-4>
- Fagherazzi, S., Mariotti, G., Leonardi, N., Canestrelli, A., Nardin, W., & Kearney, W. S. (2020). Salt Marsh Dynamics in a Period of Accelerated Sea Level Rise. *Journal of Geophysical Research: Earth Surface*, *125*(8), e2019JF005200. <https://doi.org/10.1029/2019JF005200>
- Federal Emergency Management Agency (FEMA). (2022, December 9). *Federal Flood Risk Management Standard*. FEMA Floodplain Management. <https://www.fema.gov/floodplain-management/intergovernmental/federal-flood-risk-management-standard>
- Federal Emergency Management Agency (FEMA). (2023, August 30). *Building Resilient Infrastructure and Communities | FEMA.gov*. FEMA Grants: Hazard Mitigation Assistance Grants. <https://www.fema.gov/grants/mitigation/building-resilient-infrastructure-communities>
- Feldman, A., Foti, R., & Montalto, F. (2019). Green Infrastructure Implementation in Urban Parks for Stormwater Management. *Journal of Sustainable Water in the Built Environment*, *5*(3), 05019003. <https://doi.org/10.1061/JSWBAY.0000880>
- FEMA. (2007). *Flood Insurance Study, City of New York, NY (All Jurisdictions)* (FIS 360497V000A). U.S. Federal Emergency Management Agency. <https://map1.msc.fema.gov/data/36/S/PDF/360497V000A.pdf?LOC=7abdd62d919a21f3a38880d56e42aedc>
- FEMA. (2013). *Flood Insurance Study, City of New York, NY (All Jurisdictions)* (FIS 360497V000B). U.S. Federal Emergency Management Agency. <http://www.nyc.gov/html/sirr/downloads/pdf/360497NY-New-York-City.pdf>
- FEMA. (2019). *National Flood Insurance Program: Flood Mitigation Measures for Multi-Family Buildings* (FEMA P-2037). Federal Emergency Management Agency. [https://content.govdelivery.com/attachments/USDHSFEMA/2020/06/24/file\\_attachments/1481529/16-J-0218\\_Multi-FamilyGuidance\\_06222020.pdf](https://content.govdelivery.com/attachments/USDHSFEMA/2020/06/24/file_attachments/1481529/16-J-0218_Multi-FamilyGuidance_06222020.pdf)
- FEMA. (2023a). *Building Performance: Basement Buildings and Urban Flooding: Hurricane Ida NYC MAT Technical Report 1* (Building Science Disaster Support Program Mitigation Assessment Team). Federal Emergency Management Agency. [https://www.fema.gov/sites/default/files/documents/fema\\_p-2333-mat-report-hurricane-ida-nyc\\_technical-report-1\\_2023.pdf](https://www.fema.gov/sites/default/files/documents/fema_p-2333-mat-report-hurricane-ida-nyc_technical-report-1_2023.pdf)
- FEMA. (2023b). *Building Performance: Egress from Floodprone Basements*. [https://www.fema.gov/sites/default/files/documents/fema\\_p-2333-mat-report-hurricane-ida-nyc\\_technical-report-2\\_2023.pdf](https://www.fema.gov/sites/default/files/documents/fema_p-2333-mat-report-hurricane-ida-nyc_technical-report-2_2023.pdf)
- Fernandes, A., Rollinson, C. R., Kearney, W. S., Dietze, M. C., & Fagherazzi, S. (2018). Declining Radial Growth Response of Coastal Forests to Hurricanes and Nor'easters. *Journal of Geophysical Research: Biogeosciences*, *123*(3), 832–849. <https://doi.org/10.1002/2017JG004125>



- Finkelstein, J. S., Gazorian, C. L., & Capurso, W. D. (2023). *Geospatial Datasets of Water Surface Elevation and Water Depth in New York City, NY Associated with the Remnants of Hurricane Ida – September 1, 2021* [dataset]. United States Geological Survey (USGS). <https://doi.org/10.5066/P9JF4OWB>
- Foster, S. (2020). Global policy overview of groundwater in urban development—A tale of 10 cities! *Water*, 12(2), 456.
- Foster, S., Baptista, A., Nguyen, K. H., Tchen, J., Tedesco, M., & Leichenko, R. (2024). NPCC4: Advancing Climate Justice in Climate Adaptation Strategies for New York City (pre-publication draft). *Annals of the New York Academy of Sciences*.
- Foster, S., Leichenko, R., Nguyen, K. H., Blake, R., Kunreuther, H., Madajewicz, M., Petkova, E. P., Zimmerman, R., Corbin-Mark, C., Yeampierre, E., Tovar, A., Herrera, C., & Ravenborg, D. (2019). New York City Panel on Climate Change 2019 Report Chapter 6: Community-Based Assessments of Adaptation and Equity. *Annals of the New York Academy of Sciences*, 1439(1), 126–173. <https://doi.org/10.1111/nyas.14009>
- Fowler, H. J., Ali, H., Allan, R. P., Ban, N., Barbero, R., Berg, P., Blenkinsop, S., Cabi, N. S., Chan, S., & Dale, M. (2021). Towards advancing scientific knowledge of climate change impacts on short-duration rainfall extremes. *Philosophical Transactions of the Royal Society A*, 379(2195), 20190542.
- Fowler, H. J., Ali, H., Allan, R. P., Ban, N., Barbero, R., Berg, P., Blenkinsop, S., Cabi, N. S., Chan, S., Dale, M., Dunn, R. J. H., Ekström, M., Evans, J. P., Fosser, G., Golding, B., Guerreiro, S. B., Hegerl, G. C., Kahraman, A., Kendon, E. J., ... Whitford, A. (2021). Towards advancing scientific knowledge of climate change impacts on short-duration rainfall extremes. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 379(2195), 20190542. <https://doi.org/10.1098/rsta.2019.0542>
- Fowler, H. J., Lenderink, G., Prein, A. F., Westra, S., Allan, R. P., Ban, N., Barbero, R., Berg, P., Blenkinsop, S., & Do, H. X. (2021). Anthropogenic intensification of short-duration rainfall extremes. *Nature Reviews Earth & Environment*, 1–16.
- Fowler, H. J., Wasko, C., & Prein, A. F. (2021). Intensification of short-duration rainfall extremes and implications for flood risk: Current state of the art and future directions. *Philosophical Transactions of the Royal Society A*, 379(2195), 20190541.
- Georgas, N., Blumberg, A., Herrington, T., Wakeman, T., Saleh, F., Runnels, D., Jordi, A., Ying, K., Yin, L., & Ramaswamy, V. (2016). The Stevens Flood Advisory System: Operational H3E flood forecasts for the greater New York/New Jersey metropolitan region. *Flood Risk Manag. Response*, 194, 648–662.
- Ghanbari, M., T.Dell, Saleh, F., Arabi, M., Chen, Z., Cherrier, J., Colle, B., Hackler, J., Madaus, L., & Orton, P. (Submitted). Assessment of Urban Pluvial Flooding In New York City: Effects of Climate Change and Coastal Compounding. *Natural Hazards (Submitted)*.
- González, J. E., Ortiz, L., Smith, B. K., Devineni, N., Colle, B., Booth, J. F., Ravindranath, A., Rivera, L., Horton, R., & Towey, K. (2019). New York City Panel on Climate Change 2019 Report Chapter 2: New methods for assessing extreme temperatures, heavy downpours, and drought. *Annals of the New York Academy of Sciences*, 1439(1), 30–70.
- González, J. E., Ortiz, L., Smith, B. K., Devineni, N., Colle, B., Booth, J. F., Ravindranath, A., Rivera, L., Horton, R., Towey, K., Kushnir, Y., Manley, D., Bader, D., & Rosenzweig, C. (2019). New York City Panel on Climate Change 2019 Report Chapter 2: New Methods for Assessing Extreme Temperatures, Heavy Downpours, and Drought. *Annals of the New York Academy of Sciences*, 1439(1), 30–70. <https://doi.org/10.1111/nyas.14007>
- Gori, A., Lin, N., Xi, D., & Emanuel, K. (2022). Tropical cyclone climatology change greatly exacerbates US extreme rainfall–surge hazard. *Nature Climate Change*, 12(2), 171–178. <https://doi.org/10.1038/s41558-021-01272-7>
- Gornitz, V., Oppenheimer, M., Kopp, R., Orton, P., Buchanan, M., Lin, N., Horton, R., & Bader, D. (2019). New York City Panel on Climate Change 2019 Report Chapter 3: Sea Level Rise. *Annals of the New York Academy of Sciences*, 1439(1), 71–94. <https://doi.org/10.1111/nyas.14006>
- Gourley, J. J., Flamig, Z. L., Vergara, H., Kirstetter, P.-E., Clark, R. A., Argyle, E., Arthur, A., Martinaitis, S., Terti, G., Erlingis, J. M., Hong, Y., & Howard, K. W. (2016). The FLASH Project: Improving the Tools for Flash Flood Monitoring and Prediction across the United States. *Bulletin of the American Meteorological Society*, 98(2), 361–372. <https://doi.org/10.1175/BAMS-D-15-00247.1>
- Gourley, J. J., Hong, Y., Flamig, Z. L., Arthur, A., Clark, R., Calianno, M., Ruin, I., Ortel, T., Wiecezorek, M. E., & Kirstetter, P.-E. (2013). A unified flash flood database across the United States. *Bulletin of the American*



- Meteorological Society*, 94(6), 799–805.
- Guillot, S., Jarvis, P., Powell, T., & Kenkre, J. (2020). Knowledge, experience and preparedness: Factors influencing citizen decision-making in severe weather situations. *International Journal of Emergency Management*, 16(1), 60–77.
- Gurumurthy, P., Orton, P., Talke, S., Georgas, N., & Booth, J. (2019). *Mechanics and Historical Evolution of Sea Level Blowouts in New York Harbor*. <https://www.mdpi.com/2077-1312/7/5/160>
- Haasnoot, M., Lawrence, J., & Magnan, A. K. (2021). Pathways to coastal retreat. *Science*, 372(6548), 1287–1290. <https://doi.org/10.1126/science.abi6594>
- Habel, S., Fletcher, C. H., Anderson, T. R., & Thompson, P. R. (2020). Sea-level rise induced multi-mechanism flooding and contribution to urban infrastructure failure. *Scientific Reports*, 10(1), 3796.
- Habel, S., Fletcher, C. H., Rotzoll, K., El-Kadi, A. I., & Oki, D. S. (2019). Comparison of a simple hydrostatic and a data-intensive 3D numerical modeling method of simulating sea-level rise induced groundwater inundation for Honolulu, Hawai'i, USA. *Environmental Research Communications*, 1(4), 041005.
- Hallett, R., Johnson, M. L., & Sonti, N. F. (2018a). Assessing the tree health impacts of salt water flooding in coastal cities: A case study in New York City. *Landscape and Urban Planning*, 177, 171–177.
- Hallett, R., Johnson, M. L., & Sonti, N. F. (2018b). Assessing the tree health impacts of salt water flooding in coastal cities: A case study in New York City. *Landscape and Urban Planning*, 177, 171–177.
- Han, Y., Ash, K., Mao, L., & Peng, Z.-R. (2020). An agent-based model for community flood adaptation under uncertain sea-level rise. *Climatic Change*, 162(4), 2257–2276. <https://doi.org/10.1007/s10584-020-02802-6>
- Harris, A. J., & Lanfranco, M. (2017). Cloudburst, weather bomb or water bomb? A review of terminology for extreme rain events and the media effect. *Weather*, 72(6), 155–163.
- Hatzikyriakou, A., & Lin, N. (2017). Simulating storm surge waves for structural vulnerability estimation and flood hazard mapping. *Natural Hazards*, 89, 939–962.
- Hauser, S., Meixler, M. S., & Laba, M. (2015). Quantification of impacts and ecosystem services loss in New Jersey coastal wetlands due to Hurricane Sandy storm surge. *Wetlands*, 35, 1137–1148.
- Hendricks, M. D., & Van Zandt, S. (2021). Unequal protection revisited: Planning for environmental justice, hazard vulnerability, and critical infrastructure in communities of color. *Environmental Justice*, 14(2), 87–97.
- Hernández, D., Chang, D., Hutchinson, C., Hill, E., Almonte, A., Burns, R., Shepard, P., Gonzalez, I., Reissig, N., & Evans, D. (2018). Public Housing on the Periphery: Vulnerable Residents and Depleted Resilience Reserves post-Hurricane Sandy. *Journal of Urban Health*, 95(5), 703–715. <https://doi.org/10.1007/s11524-018-0280-4>
- Hossain, M. K., & Meng, Q. (2020). A fine-scale spatial analytics of the assessment and mapping of buildings and population at different risk levels of urban flood. *Land Use Policy*, 99, 104829.
- Hummel, M. A., Griffin, R., Arkema, K., & Guerry, A. D. (2021). Economic evaluation of sea-level rise adaptation strongly influenced by hydrodynamic feedbacks. *Proceedings of the National Academy of Sciences*, 118(29), e2025961118. <https://doi.org/10.1073/pnas.2025961118>
- Iowa Environmental Mesonet. (2023). *Multi-RADAR Multi-Sensor (MRMS) Archiving*. Iowa State University - Iowa Environmental Mesonet. <https://mesonet.agron.iastate.edu/archive/>
- IPCC. (2012). *Special Report on Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation (SREX)*. Cambridge University Press. [https://www.ipcc.ch/site/assets/uploads/2018/03/SREX\\_Full\\_Report-1.pdf](https://www.ipcc.ch/site/assets/uploads/2018/03/SREX_Full_Report-1.pdf)
- IPCC. (2022). Annex I: Glossary. In R. van Diemen, J. B. R. Matthews, V. Möller, J. S. Fuglestedt, V. Masson-Delmotte, C. Méndez, A. Reisinger, & S. Semenov (Eds.), *IPCC, 2022: Climate Change 2022: Mitigation of Climate Change. Contribution of Working Group III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*. Cambridge University Press. [https://www.ipcc.ch/report/ar6/wg3/downloads/report/IPCC\\_AR6\\_WGIII\\_Annex-I.pdf](https://www.ipcc.ch/report/ar6/wg3/downloads/report/IPCC_AR6_WGIII_Annex-I.pdf)
- IPCC. (2023a). *Climate Change 2022 – Impacts, Adaptation and Vulnerability: Working Group II Contribution to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change - Chapter 1* (1st ed.). Cambridge University Press. <https://doi.org/10.1017/9781009325844>
- IPCC. (2023b). *Climate Change 2022 – Impacts, Adaptation and Vulnerability: Working Group II Contribution to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change: Annex II- Glossary* (1st ed.).





- Cambridge University Press. <https://doi.org/10.1017/9781009325844>
- Jonkman, S. N., & Vrijling, J. K. (2008). Loss of life due to floods. *Journal of Flood Risk Management*, 1(1), 43–56.
- Junk, W. J., Bayley, P. B., & Sparks, R. E. (1989). The flood pulse concept in river-floodplain systems. *Canadian Special Publication of Fisheries and Aquatic Sciences*, 106(1), 110–127.
- Keene, D. E., & Geronimus, A. T. (2011). Community-based support among African American public housing residents. *Journal of Urban Health*, 88, 41–53.
- Kemp, A. C., & Horton, B. P. (2013). Contribution of relative sea-level rise to historical hurricane flooding in New York City: HISTORICAL HURRICANE FLOODING IN NEW YORK CITY. *Journal of Quaternary Science*, 28(6), 537–541. <https://doi.org/10.1002/jqs.2653>
- Kim, Y., Carvalhaes, T., Helmrich, A., Markolf, S., Hoff, R., Chester, M., Li, R., & Ahmad, N. (2022). Leveraging SETS resilience capabilities for safe-to-fail infrastructure under climate change. *Current Opinion in Environmental Sustainability*, 54, 101153.
- Kim, Y., Chester, M. V., Eisenberg, D. A., & Redman, C. L. (2019). The Infrastructure Trolley Problem: Positioning Safe-to-fail Infrastructure for Climate Change Adaptation. *Earth's Future*, 7(7), 704–717. <https://doi.org/10.1029/2019EF001208>
- Kirwan, M. L., Kirwan, J. L., & Copenheaver, C. A. (2007). Dynamics of an Estuarine Forest and its Response to Rising Sea Level. *Journal of Coastal Research*, 232, 457–463. <https://doi.org/10.2112/04-0211.1>
- Knott, J. F., Daniel, J. S., Jacobs, J. M., & Kirshen, P. (2018). Adaptation planning to mitigate coastal-road pavement damage from groundwater rise caused by sea-level rise. *Transportation Research Record*, 2672(2), 11–22.
- Knott, J. F., Elshaer, M., Daniel, J. S., Jacobs, J. M., & Kirshen, P. (2017). Assessing the effects of rising groundwater from sea level rise on the service life of pavements in coastal road infrastructure. *Transportation Research Record*, 2639(1), 1–10.
- Koslov, L., Merdjanoff, A., Sulakshana, E., & Klinenberg, E. (2021). When rebuilding no longer means recovery: The stress of staying put after Hurricane Sandy. *Climatic Change*, 165(3), 59. <https://doi.org/10.1007/s10584-021-03069-1>
- Kruczkiewicz, A., Klopp, J., Fisher, J., Mason, S., McClain, S., Sheekh, N. M., Moss, R., Parks, R. M., & Braneon, C. (2021). Compound risks and complex emergencies require new approaches to preparedness. *Proceedings of the National Academy of Sciences*, 118(19), e2106795118. <https://doi.org/10.1073/pnas.2106795118>
- La Mort, J. R. (2018). Public Housing and Public Health: The Separate and Unequal Protection of Private and Public Housing Tenants' Health in New York City. *Journal of Affordable Housing & Community Development Law*, 27(2), 385–400.
- Lai, Y., Li, J., Gu, X., Liu, C., & Chen, Y. D. (2021). Global compound floods from precipitation and storm surge: Hazards and the roles of cyclones. *Journal of Climate*, 1–55. <https://doi.org/10.1175/JCLI-D-21-0050.1>
- Leonardi, N., Carnacina, I., Donatelli, C., Ganju, N. K., Plater, A. J., Schuerch, M., & Temmerman, S. (2018). Dynamic interactions between coastal storms and salt marshes: A review. *Geomorphology*, 301, 92–107. <https://doi.org/10.1016/j.geomorph.2017.11.001>
- Li, L. (2023). Environmental goods provision and gentrification: Evidence from MillionTreesNYC. *Journal of Environmental Economics and Management*, 120, 102828. <https://doi.org/10.1016/j.jeem.2023.102828>
- Liao, K.-H. (2012). A theory on urban resilience to floods—A basis for alternative planning practices. *Ecology and Society*, 17(4).
- Liu, T., Su, X., & Prigiobbe, V. (2018). Groundwater-sewer interaction in urban coastal areas. *Water*, 10(12), 1774.
- Lo. (2024). (XXX In Preparation).
- Local Law 172, Pub. L. No. 172 (2018). <https://legistar.council.nyc.gov/LegislationDetail.aspx?ID=3371671&GUID=36F04A1F-7293-4173-B29F-A4065A5046A2>
- Macdonald, D., Dixon, A., Newell, A., & Hallaways, A. (2012). Groundwater flooding within an urbanised flood plain. *Journal of Flood Risk Management*, 5(1), 68–80.
- Mach, K. J., Kraan, C. M., Hino, M., Siders, A. R., Johnston, E. M., & Field, C. B. (2019). Managed retreat through voluntary buyouts of flood-prone properties. *Science Advances*, 5(10), eaax8995. <https://doi.org/10.1126/sciadv.aax8995>



- Mach, K. J., & Siders, A. R. (2021). Reframing strategic, managed retreat for transformative climate adaptation. *Science*, 372(6548), 1294–1299. <https://doi.org/10.1126/science.abh1894>
- Madajewicz, M. (2020). Who is vulnerable and who is resilient to coastal flooding? Lessons from Hurricane Sandy in New York City. *Climatic Change*, 163(4), 2029–2053. <https://doi.org/10.1007/s10584-020-02896-y>
- Madajewicz, M., & Coirolo, C. (2016). *Vulnerability to coastal storms in New York City neighborhoods REPORT Prepared for The Trust for Public Land*.
- Maldonado, S. (2021, October 26). *City Eyes New Push to Buy Out Flood-Prone Houses as Climate Change Hits Home*. THE CITY - NYC News. <http://www.thecity.nyc/2021/10/26/nyc-buy-out-flood-prone-homes-climate-change-sandy-ida/>
- Mancini, C. P., Lollai, S., Volpi, E., & Fiori, A. (2020). Flood modeling and groundwater flooding in urbanized reclamation areas: The case of Rome (Italy). *Water*, 12(7), 2030.
- Manson, S., Schroeder, J., Van Riper, D., Kugler, T., & Ruggles, S. (2021). *IPUMS National Historical Geographic Information System: Version 16.0* [dataset]. <https://doi.org/10.18128/D050.V16.0>
- Markolf, S. A., Chester, M. V., Helmrich, A. M., & Shannon, K. (2021). Re-imagining design storm criteria for the challenges of the 21st century. *Cities*, 109, 102981.
- Maroko, A., Maantay, J., Pérez Machado, R. P., & Barrozo, L. V. (2019). Improving population mapping and exposure assessment: Three-dimensional dasymetric disaggregation in New York City and São Paulo, Brazil. *Papers in Applied Geography*, 5(1–2), 45–57.
- Marshak, S., & Rauber, R. (2022). *Natural Disasters* (First Edition). W.W. Norton & Company.
- Marsooli, R., Orton, P. M., & Mellor, G. (2017). Modeling wave attenuation by salt marshes in Jamaica Bay, New York, using a new rapid wave model. *Journal of Geophysical Research: Oceans*, 122(7), 5689–5707. <https://doi.org/10.1002/2016JC012546>
- Martinaitis, S. M., Wilson, K. A., Yussouf, N., Gourley, J. J., Vergara, H., Meyer, T. C., Heinselman, P. L., Gerard, A., Berry, K. L., Vergara, A., & Monroe, J. (2023). A Path Toward Short-Term Probabilistic Flash Flood Prediction. *Bulletin of the American Meteorological Society*, 104(3), E585–E605. <https://doi.org/10.1175/BAMS-D-22-0026.1>
- Martin-Breen, P., & Anderies, J. M. (2011). *Resilience: A Literature Review*. Institute of Development Studies, The Resource Alliance, The Rockefeller Foundation.
- Martínez-Gomariz, E., Gómez, M., & Russo, B. (2016). Experimental study of the stability of pedestrians exposed to urban pluvial flooding. *Natural Hazards*, 82(2), 1259–1278.
- Martínez-Gomariz, E., Gómez, M., Russo, B., & Djordjević, S. (2018). Stability criteria for flooded vehicles: A state-of-the-art review. *Journal of Flood Risk Management*, 11, S817–S826.
- Marvi, M. T. (2020). A review of flood damage analysis for a building structure and contents. *Natural Hazards*, 102(3), 967–995.
- Maskrey, S. A., Mount, N. J., & Thorne, C. R. (2022). Doing flood risk modelling differently: Evaluating the potential for participatory techniques to broaden flood risk management decision-making. *Journal of Flood Risk Management*, 15(1), e12757. <https://doi.org/10.1111/jfr3.12757>
- Mason, E., & Montalto, F. A. (2015). The overlooked role of New York City urban yards in mitigating and adapting to climate change. *Local Environment*, 20(12), 1412–1427. <https://doi.org/10.1080/13549839.2014.907249>
- Matte, T. D., Lane, K., Tipaldo, J., Barnes, J., Knowlton, K., Torem, E., Anand, G., Yoon, L., Marcotullio, P. J., Balk, D., Constible, J., Elszasz, H., Ito, K., Jessel, S., Limaye, V. S., Parks, R. M., Rutigliano, M., Sorenson, C., & Yuan, A. (2024). NPCC4: Climate Change and New York City's Health Risk (pre-publication draft). *Annals of New York Academy of Sciences*.
- McClain, M. E., Boyer, E. W., Dent, C. L., Gergel, S. E., Grimm, N. B., Groffman, P. M., Hart, S. C., Harvey, J. W., Johnston, C. A., & Mayorga, E. (2003). Biogeochemical hot spots and hot moments at the interface of terrestrial and aquatic ecosystems. *Ecosystems*, 6(4), 301–312.
- McClymont, K., Morrison, D., Beevers, L., & Carmen, E. (2020). Flood resilience: A systematic review. *Journal of Environmental Planning and Management*, 63(7), 1151–1176. <https://doi.org/10.1080/09640568.2019.1641474>
- McPhearson, T., Towers, J., Balk, D., Horton, R., Madajewicz, M., Montalto, F. A., Neidell, M., Orton, P., Rosenzweig, B. R., Kennedy, C., & Reed, D. (2024). *New York City Town+Gown: Climate Vulnerability*,



- Impact, and Adaptation Analysis Final Report In Preparation*. New York City Mayor's Office of Climate and Environmental Justice and Department of Citywide Administrative Services.  
<https://climate.cityofnewyork.us/initiatives/vulnerability-impacts-and-adaptation-analysis/>
- McPhillips, L. E., Matsler, M., Rosenzweig, B. R., & Kim, Y. (2021). What is the role of green stormwater infrastructure in managing extreme precipitation events? *Sustainable and Resilient Infrastructure*, 6(3–4), 133–142.
- McPhillips, L., Wu, H., Quezada, C. R., Rosenzweig, B., Sauer, J. R., & Winfrey, B. (2023). Nature-based solutions as critical urban infrastructure for water resilience. In *Nature-Based Solutions for Cities* (pp. 146–166). Edward Elgar Publishing. <https://www.elgaronline.com/edcollchap-oa/book/9781800376762/book-part-9781800376762-17.xml>
- Meixler, M. S., Piana, M. R., & Henry, A. (2023). Modeling present and future ecosystem services and environmental justice within an urban-coastal watershed. *Landscape and Urban Planning*, 232, 104659.  
<https://doi.org/10.1016/j.landurbplan.2022.104659>
- Michael, H., Russoniello, C. J., & Byron, L. (2013). Global assessment of vulnerability to sea-level rise in topography-limited and recharge-limited coastal groundwater systems. *Water Resources Research*, 49(4), 2228–2240.
- Middleton, B. A. (2016). Differences in impacts of Hurricane Sandy on freshwater swamps on the Delmarva Peninsula, Mid-Atlantic Coast, USA. *Ecological Engineering*, 87, 62–70.  
<https://doi.org/10.1016/j.ecoleng.2015.11.035>
- Miller, S. M., & Montalto, F. A. (2019). Stakeholder perceptions of the ecosystem services provided by Green Infrastructure in New York City. *Ecosystem Services*, 37, 100928.  
<https://doi.org/10.1016/j.ecoser.2019.100928>
- Moftakhari, H. R., Salvadori, G., AghaKouchak, A., Sanders, B. F., & Matthew, R. A. (2017). Compounding effects of sea level rise and fluvial flooding. *Proceeds of the National Academies of Sciences*, 11(34), 9785–9790.
- Moghadas, S., Leonhardt, G., Marsalek, J., & Viklander, M. (2018). Modeling urban runoff from rain-on-snow events with the US EPA SWMM model for current and future climate scenarios. *Journal of Cold Regions Engineering*, 32(1), 04017021.
- Montalto, F. A., & Steenhuis, T. S. (2004). The link between hydrology and restoration of tidal marshes in the New York/New Jersey Estuary. *Wetlands*, 24(2), 414–425. [https://doi.org/10.1672/0277-5212\(2004\)024\[0414:TLBHAR\]2.0.CO;2](https://doi.org/10.1672/0277-5212(2004)024[0414:TLBHAR]2.0.CO;2)
- Montalto, F. A., Steenhuis, T. S., & Parlange, J.-Y. (2006). The hydrology of Piermont Marsh, a reference for tidal marsh restoration in the Hudson river estuary, New York. *Journal of Hydrology*, 316(1), 108–128.  
<https://doi.org/10.1016/j.jhydrol.2005.03.043>
- Monti, J. Jr., Como, M., & Busciolano, R. (2013a). *Water-table and potentiometric-surface altitudes in the Upper Glacial, Magothy, and Lloyd Aquifers beneath Long Island, New York, April-May 2010* (2012th ed.) [4 sheets]. <https://pubs.er.usgs.gov/publication/sim3270>
- Monti, J. Jr., Como, M., & Busciolano, R. (2013b). *Water-table and potentiometric-surface altitudes in the Upper Glacial, Magothy, and Lloyd Aquifers beneath Long Island, New York, April-May 2010* (2012th ed.) [4 sheets]. <https://pubs.er.usgs.gov/publication/sim3270>
- Morris, J. T., Lynch, J., Renken, K. A., Stevens, S., Tyrrell, M., & Plaisted, H. (2020). Tidal and Hurricane Impacts on Saltmarshes in the Northeastern Coastal and Barrier Network: Theory and Empirical Results. *Estuaries and Coasts*, 43(7), 1658–1671. <https://doi.org/10.1007/s12237-020-00790-5>
- MTA. (2007). *August 8, 2007 Storm Report*. Metropolitan Transportation Authority.  
[http://web.mta.info/mta/pdf/storm\\_report\\_2007.pdf](http://web.mta.info/mta/pdf/storm_report_2007.pdf)
- Munk, W., Snodgrass, F., & Carrier, G. (1956). Edge Waves on the Continental Shelf. *Science*, 123(3187), 127–132.  
<https://doi.org/10.1126/science.123.3187.127>
- Munns, R., & Tester, M. (2008). Mechanisms of Salinity Tolerance. *Annual Review of Plant Biology*, 59(1), 651–681.  
<https://doi.org/10.1146/annurev.arplant.59.032607.092911>
- Musolino, G., Ahmadian, R., Xia, J., & Falconer, R. A. (2020). Mapping the danger to life in flash flood events adopting a mechanics based methodology and planning evacuation routes. *Journal of Flood Risk Management*, 13(4), e12627.
- Mydlarz, C., Challagonda, P. S. V., Steers, B., Rucker, J., Brain, T., Branco, B., Burnett, H., Kaur, A., Fischman, R., Graziano, K., Kreuger, K., Henaff, E., Ignace, V., Jozwiak, E., Palchuri, J., Pierone, P., Rothman, P., Todolo-



- Crow, R., & Silverman, A. I. (2024). FloodNet: Low-cost ultrasonic sensors for real-time measurement of hyperlocal, street-level floods in New York City (pre-publication). *Water Resources Research*.
- Nadal-Caraballo, N. C., Melby, J. A., & Gonzalez, V. M. (2015). Statistical Analysis of Historical Extreme Water Levels for the U.S. North Atlantic Coast Using Monte Carlo Life-Cycle Simulation. *Journal of Coastal Research*, 32(1), 35. <https://doi.org/10.2112/JCOASTRES-D-15-00031.1>
- National Academies of Sciences, Engineering, and Medicine. (2019). *Framing the Challenge of Urban Flooding in the United States* [Consensus Study]. <https://doi.org/10.17226/25381>
- National Academies of Sciences & Medicine. (2018). *Emergency alert and warning systems: Current knowledge and future research directions*.
- National Oceanic and Atmospheric Administration (NOAA). (2023). *P-SURGE ensemble coastal storm surge forecasts*. National Oceanic and Atmospheric Administration NCEP Center Operations; NCEP Central Operations. <https://www.nco.ncep.noaa.gov/pmb/products/psurge/>
- National Research Council. (2013). *Levees and the National Flood Insurance Program: Improving Policies and Practices* (pp. 1–258). National Academies of Sciences, Engineering, and Medicine. <https://nap.nationalacademies.org/download/18309>
- NCEI. (2007). *Episode 5088* [dataset]. Storm Events Database. <https://www.ncdc.noaa.gov/stormevents/>
- NCEI. (2018a). *Episode 125008* [dataset]. Storm Events Database. <https://www.ncdc.noaa.gov/stormevents/>
- NCEI. (2018b). *Episode 131100* [dataset]. Storm Events Database. <https://www.ncdc.noaa.gov/stormevents/>
- NCEI. (2023). *Storm Events Database* [Bulk CSV]. National Center for Environmental Information. <https://www.ncdc.noaa.gov/stormevents/>
- New, M., Reckien, D., Viner, D., Adler, C., Cheong, S.M., Conde, C., Constable, A., Coughlan de Perez, E., Lammel, A., Mechler, R., Orlove, B., & Solecki, W. (2023). Decision-Making Options for Managing Risk. In: Climate Change 2022: Impacts, Adaptation and Vulnerability. Contribution of Working Group II to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change. In H. O. Portner, D. C. Roberts, M. Tignor, E. S. Poloczanska, K. Mintenbeck, A. Alegria, M. Craig, S. Langsdorf, S. Loschke, V. Moller, A. Okem, & B. Rama (Eds.), *Climate Change 2022 – Impacts, Adaptation and Vulnerability: Contribution of Working Group II to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*. (1st ed., pp. 2539–2654). Cambridge University Press. <https://doi.org/10.1017/9781009325844>
- New York City Department of Environmental Protection. (2021). *Increasing Stormwater Resilience in the Face of Climate Change: Our Long Term Vision*. <https://www.nyc.gov/assets/dep/downloads/pdf/climate-resiliency/increasing-stormwater-resilience-in-the-face-of-climate-change.pdf>
- New York City Housing Authority. (2021). *Climate Change at NYCHA: A Plan to Adapt*. New York City Housing Authority. [https://www.nyc.gov/assets/nycha/downloads/pdf/Climate-Change-at-NYCHA\\_lores\\_single-pages.pdf](https://www.nyc.gov/assets/nycha/downloads/pdf/Climate-Change-at-NYCHA_lores_single-pages.pdf)
- NOAA National Hurricane Center. (2023). *Sea, Lake, and Overland Surges from Hurricanes (SLOSH)*. National Hurricane Center and Central Pacific Hurricane Center. <https://www.nhc.noaa.gov/surge/slosh.php>
- Nordio, G., Frederiks, R., Hingst, M., Carr, J., Kirwan, M., Gedam, K., Michael, H., & Fagherazzi, S. (2023). Frequent Storm Surges Affect the Groundwater of Coastal Ecosystems. *Geophysical Research Letters*, 50(1), e2022GL100191. <https://doi.org/10.1029/2022GL100191>
- Notify NYC. (2024). *About Notify NYC*. <https://a858-nycnotify-dev.nyc.gov/Home/About>
- NWS. (2011). *FXUS61 KOKX 170000 AFDOKX* [dataset]. Iowa Environmental Mesonet. <https://mesonet.agron.iastate.edu/wx/afos/#>
- NYC 311. (2010). *311 Service Requests from 2010-Present* [dataset]. NYC OpenData. [https://data.cityofnewyork.us/Social-Services/311-Service-Requests-from-2010-to-Present/erm2-nwe9/about\\_data](https://data.cityofnewyork.us/Social-Services/311-Service-Requests-from-2010-to-Present/erm2-nwe9/about_data)
- NYC DEP. (2014). *2014 Green Infrastructure Annual Report*. New York City Department of Environmental Protection. <https://www.nyc.gov/assets/dep/downloads/pdf/water/stormwater/green-infrastructure/gi-annual-report-2014.pdf>
- NYC DEP. (2021). *NYC Green Infrastructure 2020 Contingency Plan*. New York City Department of Environmental Protection. <https://www.nyc.gov/assets/dep/downloads/pdf/water/stormwater/green-infrastructure/gi-contingency-plan-2020.pdf>



- NYC MOS. (2015). *Geothermal Systems and their Application in New York City*. New York City Mayor's Office of Sustainability. [https://www.nyc.gov/html/planytc/downloads/pdf/publications/2015\\_Geothermal.pdf](https://www.nyc.gov/html/planytc/downloads/pdf/publications/2015_Geothermal.pdf)
- NYC OMB. (2023). *CDBG-DR Draft Action Plan for The Remnants of Hurricane Ida* (HUD Approved Version). New York City Mayor's Office of Management and Budget. [https://www.nyc.gov/assets/cdbgdrr/documents/amendments/Ida\\_Amendments/2\\_NYC\\_Hurricane\\_Ida\\_Action\\_Plan\\_SA1\\_HUD\\_Approved\\_\(8.8.23\).pdf](https://www.nyc.gov/assets/cdbgdrr/documents/amendments/Ida_Amendments/2_NYC_Hurricane_Ida_Action_Plan_SA1_HUD_Approved_(8.8.23).pdf)
- NYC OTI. (2020). *NYCHA Public Housing Developments | NYC Open Data (december 2020)*. [https://data.cityofnewyork.us/Housing-Development/NYCHA-Public-Housing-Developments/phvi-damg/about\\_data](https://data.cityofnewyork.us/Housing-Development/NYCHA-Public-Housing-Developments/phvi-damg/about_data)
- NYC OTI. (2023). *Building Footprints* [ESRI Shapefile]. NYC Open Data. <https://data.cityofnewyork.us/Housing-Development/Building-Footprints/nqwf-w8eh>
- NYC Planning. (2020). *NYC's Floodplain by the Numbers*. City of New York Department of City Planning. <https://www.nyc.gov/assets/planning/download/pdf/plans-studies/resilient-neighborhoods/floodplain-by-numbers.pdf>
- Orson, R. A., Warren, R. S., & Niering, W. A. (1998). Interpreting Sea Level Rise and Rates of Vertical Marsh Accretion in a Southern New England Tidal Salt Marsh. *Estuarine, Coastal and Shelf Science*, 47(4), 419–429. <https://doi.org/10.1006/ecss.1998.0363>
- Ortiz, L., Braneon, C. V., Horton, R., Bader, D., Orton, P. M., Gornitz, V., Rosenzweig, B. R., McPhearson, T., Smalls-Mantey, L., Sheerazi, H., Montalto, F. A., Goldhandan, M. R., Evans, C., DeGaetano, A. T., Mallen, E., Carter, L., McConnell, K., & Mayo, T. L. (2024). NPCC4: Tail Risk, Climate Drivers of Extreme Heat, and New Methods for Extreme Event Projections (pre-publication draft). *Annals of New York Academy of Sciences*.
- Orton, P., Georgas, N., Blumberg, A., & Pullen, J. (2012). Detailed modeling of recent severe storm tides in estuaries of the New York City region: STORM TIDES IN NEW YORK CITY ESTUARIES. *Journal of Geophysical Research: Oceans*, 117(C9), n/a-n/a. <https://doi.org/10.1029/2012JC008220>
- Orton, P., Lin, N., Gornitz, V., Colle, B., Booth, J., Feng, K., Buchanan, M., Oppenheimer, M., & Patrick, L. (2019a). New York City Panel on Climate Change 2019 Report Chapter 4: Coastal Flooding. *Annals of the New York Academy of Sciences*, 1439(1), 95–114. <https://doi.org/10.1111/nyas.14011>
- Orton, P., Lin, N., Gornitz, V., Colle, B., Booth, J., Feng, K., Buchanan, M., Oppenheimer, M., & Patrick, L. (2019b). New York City panel on climate change 2019 report chapter 4: Coastal flooding. *Annals of the New York Academy of Sciences*, 1439(1), 95–114.
- Orton, P. M., Conticello, F. R., Cioffi, F., Hall, T. M., Georgas, N., Lall, U., Blumberg, A. F., & MacManus, K. (2020). Flood hazard assessment from storm tides, rain and sea level rise for a tidal river estuary. *Natural Hazards*, 102(2), 729–757. <https://doi.org/10.1007/s11069-018-3251-x>
- Orton, P. M., Hall, T. M., Talke, S. A., Blumberg, A. F., Georgas, N., & Vinogradov, S. (2016). A validated tropical-extratropical flood hazard assessment for New York Harbor: Flood Assessment for New York Harbor. *Journal of Geophysical Research: Oceans*, 121, 8904–8929. <https://doi.org/10.1002/2016JC011679>
- Orton, P. M., Sanderson, E. W., Talke, S. A., Giampieri, M., & MacManus, K. (2020). Storm tide amplification and habitat changes due to urbanization of a lagoonal estuary. *Natural Hazards and Earth System Sciences*, 20(9), 2415–2432.
- Orton, P. M., Talke, S. A., Jay, D. A., Yin, L., Blumberg, A. F., Georgas, N., Zhao, H., Roberts, H. J., & MacManus, K. (2015). Channel shallowing as mitigation of coastal flooding. *Journal of Marine Science and Engineering*, 3(3), 654–673.
- Orton, P., Ralston, D., van Prooijen, B., Secor, D., Ganju, N., Chen, Z., Fernald, S., Brooks, B., & Marcell, K. (2023). Increased Utilization of Storm Surge Barriers: A Research Agenda on Estuary Impacts. *Earth's Future*, 11(3), e2022EF002991. <https://doi.org/10.1029/2022EF002991>
- Orton, P., Vinogradov, S., Georgas, N., Blumberg, A., Lin, N., Gornitz, V., Little, C., Jacob, K., & Horton, R. (2015). New York City Panel on Climate Change 2015 Report Chapter 4: Dynamic Coastal Flood Modeling. *Annals of the New York Academy of Sciences*, 1336(1), 56–66. <https://doi.org/10.1111/nyas.12589>
- Pagano, A., Pluchinotta, I., Pengal, P., Cokan, B., & Giordano, R. (2019). Engaging stakeholders in the assessment of NBS effectiveness in flood risk reduction: A participatory System Dynamics Model for benefits and co-benefits evaluation. *Science of The Total Environment*, 690, 543–555. <https://doi.org/10.1016/j.scitotenv.2019.07.059>



- Pareja-Roman, L. F., Orton, P. M., & Talke, S. A. (2023). Effect of Estuary Urbanization on Tidal Dynamics and High Tide Flooding in a Coastal Lagoon. *Journal of Geophysical Research: Oceans*, 128(1), e2022JC018777. <https://doi.org/10.1029/2022JC018777>
- Patrick, L., Solecki, W., Gornitz, V., Orton, P., & Blumberg, A. (2019). New York City Panel on Climate Change 2019 Report Chapter 5: Mapping Climate Risk. *Annals of the New York Academy of Sciences*, 1439(1), 115–125. <https://doi.org/10.1111/nyas.14015>
- Peck, A., Adams, S., Armstrong, A., Bartlett, A., Bortman, M., Branco, A., Brown, M., Donohue, J., Kodis, M., McCann, M., & Smith, E. (2022). A new framework for flood adaptation: Introducing the Flood Adaptation Hierarchy. *Ecology and Society*, 27(4), art5. <https://doi.org/10.5751/ES-13544-270405>
- Peleg, N., Ban, N., Gibson, M. J., Chen, A. S., Paschalis, A., Burlando, P., & Leitão, J. P. (2022). Mapping storm spatial profiles for flood impact assessments. *Advances in Water Resources*, 104258.
- Pendergrass, A. G. (2020). *Changing Degree of Convective Organization as a Mechanism for Dynamic Changes in Extreme Precipitation*. *Curr Clim Change Rep* 6, 47–54.
- Pérez-Morales, A., Gil-Guirado, S., & Martínez-García, V. (2022). Dasymetry Dash Flood (DDF). A method for population mapping and flood exposure assessment in touristic cities. *Applied Geography*, 142, 102683.
- Peteet, D. M., Nichols, J., Kenna, T., Chang, C., Browne, J., Reza, M., Kovari, S., Liberman, L., & Stern-Protz, S. (2018). Sediment starvation destroys New York City marshes' resistance to sea level rise. *Proceedings of the National Academy of Sciences*, 115(41), 10281–10286. <https://doi.org/10.1073/pnas.1715392115>
- Rainey, J. L., Brody, S. D., Galloway, G. E., & Highfield, W. E. (2021). Assessment of the growing threat of urban flooding: A case study of a national survey. *Urban Water Journal*, 18(5), 375–381.
- Regional Plan Association. (2022). *Preventing Another Ida*. <https://rpa.org/work/reports/hurricane-ida-stormwater-management-queens>
- Regional Plan Association. (2023). *NYC Climate Resilience Plan Mapper*. Regional Plan Association: Sandy10 Community Resilience Plans Map. <https://rpa.org/maps/resilience.html>
- Rosenzweig, B., & Fekete, B. (2018). The NYC Green Infrastructure Plan and Opportunities for Innovation in Climate Change Resilience. In *Smarter New York City: How City Agencies Innovate*.
- Rosenzweig, B. R., Groffman, P. M., Zarnoch, C. B., Branco, B. F., Hartig, E. K., Fitzpatrick, J., Forgione, H. M., & Parris, A. (2018). Nitrogen regulation by natural systems in “unnatural” landscapes: Denitrification in ultra-urban coastal ecosystems. *Ecosystem Health and Sustainability*, 4(9), 205–224.
- Rosenzweig, B. R., Herreros Cantis, P., Kim, Y., Cohn, A., Grove, K., Brock, J., Yesuf, J., Mistry, P., Welty, C., & McPhearson, T. (2021). The value of urban flood modeling. *Earth's Future*, 9(1), e2020EF001739.
- Rosenzweig, B. R., McPhillips, L., Chang, H., Cheng, C., Welty, C., Matsler, M., Iwaniec, D., & Davidson, C. I. (2018). Pluvial flood risk and opportunities for resilience. *Wiley Interdisciplinary Reviews: Water*, 5(6), e1302.
- Rosenzweig, B., Ruddell, B., McPhillips, L., Hobbins, R., McPhearson, T., Cheng, Z., Chang, H., & Kim, Y. (2019). Developing Knowledge Systems for Urban Resilience to Cloudburst Rain Events. *Environmental Science & Policy*, 99, 150–159. <https://doi.org/10.1016/j.envsci.2019.05.020>
- Rotzoll, K., & Fletcher, C. H. (2013). Assessment of groundwater inundation as a consequence of sea-level rise. *Nature Climate Change*, 3(5), 477.
- Rözer, V., Mehryar, S., & Surminski, S. (2022). From managing risk to increasing resilience: A review on the development of urban flood resilience, its assessment and the implications for decision making. *Environmental Research Letters*, 17(12), 123006. <https://doi.org/10.1088/1748-9326/aca8bc>
- Rufat, S., Tate, E., Burton, C. G., & Maroof, A. S. (2015). Social vulnerability to floods: Review of case studies and implications for measurement. *International Journal of Disaster Risk Reduction*, 14, 470–486.
- Sacatelli, R., Kaplan, M., Carleton, G., & Lathrop, R. G. (2023). Coastal Forest Dieback in the Northeast USA: Potential Mechanisms and Management Responses. *Sustainability*, 15(8), 6346.
- Sadiq, A.-A., Okhai, R., Tyler, J., & Entress, R. (2023). Public alert and warning system literature review in the USA: Identifying research gaps and lessons for practice. *Natural Hazards*, 1–34.
- Sahin, O., & Mohamed, S. (2013). A spatial temporal decision framework for adaptation to sea level rise. *Environmental Modelling & Software*, 46, 129–141. <https://doi.org/10.1016/j.envsoft.2013.03.004>
- Sampson, N., Price, C., Kassem, J., Doan, J., & Hussein, J. (2019). “We’re Just Sitting Ducks”: Recurrent Household



- Flooding as An Underreported Environmental Health Threat in Detroit's Changing Climate. *International Journal of Environmental Research and Public Health*, 16(1), 6.
- Sanderson, E. W., & Brown, M. (2007). Mannhatta: An ecological first look at the Manhattan landscape prior to Henry Hudson. *Northeastern Naturalist*, 545–570.
- Scawthorn, C., Blais, N., Seligson, H., Tate, E., Mifflin, E., Thomas, W., Murphy, J., & Jones, C. (2006). HAZUS-MH flood loss estimation methodology. I: Overview and flood hazard characterization. *Natural Hazards Review*, 7(2), 60–71.
- Schubert, J. E., Luke, A., AghaKouchak, A., & Sanders, B. F. (2022). A framework for mechanistic flood inundation forecasting at the metropolitan scale. *Water Resources Research*, 58(10), e2021WR031279.
- Seip, M. (2022). *Community Visioning for Vacant Land following Managed Retreat in Edgemere, Queens, N.Y.* Collective for Community, Culture & Environment / Rockaway Initiative for Sustainability & Equity. <https://www.riserockaway.org/rise/initiatives/community-visioning-for-vacant-l/community-visioning-edgemere/CVE-final-report-action-plan:en-us.pdf>
- Sharifi, A. (2021). Co-benefits and synergies between urban climate change mitigation and adaptation measures: A literature review. *Science of the Total Environment*, 750, 141642.
- Sharp, J. M., Krothe, J. N., Mather, J. D., Gracia-Fresca, B., & Stewart, C. A. (2003). Effects of urbanization on groundwater systems. *Earth Science in the City: A Reader*, 257–278.
- Shevade, L. J., Lo, L. J., & Montalto, F. A. (2020). Numerical 3D Model Development and Validation of Curb-Cut Inlet for Efficiency Prediction. *Water*, 12(6), 1791. <https://doi.org/10.3390/w12061791>
- Shevade, L. J., & Montalto, F. A. (2021). Forensic Investigation of Four Monitored Green Infrastructure Inlets. *Water*, 13(13), 1787. <https://doi.org/10.3390/w13131787>
- Silverman, A. I., Brain, T., Branco, B., Challagonda, P. S. V., Choi, P., Fischman, R., Graziano, K., Hénaff, E., Mydlarz, C., Rothman, P., & Toledo-Crow, R. (2022). Making waves: Uses of real-time, hyperlocal flood sensor data for emergency management, resiliency planning, and flood impact mitigation. *Water Research*, 220, 118648. <https://doi.org/10.1016/j.watres.2022.118648>
- Smerdon, B. D. (2017). A synopsis of climate change effects on groundwater recharge. *Journal of Hydrology*, 555, 125–128. <https://doi.org/10.1016/j.jhydrol.2017.09.047>
- Smith, J. A., Baeck, M. L., Su, Y., Liu, M., & Vecchi, G. A. (2023). Strange Storms: Rainfall Extremes From the Remnants of Hurricane Ida (2021) in the Northeastern US. *Water Resources Research*, 59(3), e2022WR033934.
- Soren, J. (1971). *Ground-Water and Geohydrologic Conditions in Queens County, Long Island, New York*.
- Soren, J. (1976). *Basement flooding and foundation damage from water-table rise in the East New York section of Brooklyn, Long Island, New York*. US Geological Survey.
- Speight, L. J., Cranston, M. D., White, C. J., & Kelly, L. (2021). Operational and emerging capabilities for surface water flood forecasting. *Wiley Interdisciplinary Reviews: Water*, 8(3), e1517.
- Speight, L., & Krupska, K. (2021). Understanding the impact of climate change on inland flood risk in the UK. *Weather*, 76(10), 330–331. <https://doi.org/10.1002/wea.4079>
- Spidalieri, K., Smith, I., Grannis, J., Li, J., Love, A., Arroyo, V., & Hamilton, L. A. (2020). *Managing the Retreat from Rising Seas: Queens, New York: Resilient Edgemere Community Plan*. Georgetown Climate Center. [https://www.georgetownclimate.org/files/MRT/GCC\\_20\\_Resilient-3web.pdf](https://www.georgetownclimate.org/files/MRT/GCC_20_Resilient-3web.pdf)
- Stevens Institute of Technology. (2024). *Stevens Flood Advisory System*. Stevens Flood Advisory System at Davidson Laboratory. <https://hudson.dl.stevens-tech.edu/sfas/>
- Stevens Institute of Technology, Center for International Earth Science Information Network at Columbia University, & Wildlife Conservation Society. (2015). *AdaptMap: Flood, Sea Level Rise, and Adaptation Mapper for Jamaica Bay, NYC*. <http://adaptmap.info/>
- Strack, O. D. L. (1976). A single-potential solution for regional interface problems in coastal aquifers. *Water Resources Research*, 12(6), 1165–1174.
- Strauss, B. H., Orton, P. M., Bittermann, K., Buchanan, M. K., Gilford, D. M., Kopp, R. E., Kulp, S., Massey, C., Moel, H. de, & Vinogradov, S. (2021). Economic damages from Hurricane Sandy attributable to sea level rise caused by anthropogenic climate change. *Nature Communications*, 12(1), Article 1. <https://doi.org/10.1038/s41467-021-22838-1>



- Su, X., Belvedere, P., Tosco, T., & Prigione, V. (2022). Studying the effect of sea level rise on nuisance flooding due to groundwater in a coastal urban area with aging infrastructure. *Urban Climate*, 43, 101164. <https://doi.org/10.1016/j.uclim.2022.101164>
- Su, X., Liu, T., Beheshti, M., & Prigione, V. (2019). Relationship between infiltration, sewer rehabilitation, and groundwater flooding in coastal urban areas. *Environmental Science and Pollution Research*, 1–11.
- Sukop, M. C., Rogers, M., Guannel, G., Infanti, J. M., & Hagemann, K. (2018). High temporal resolution modeling of the impact of rain, tides, and sea level rise on water table flooding in the Arch Creek basin, Miami-Dade County Florida USA. *Science of the Total Environment*, 616, 1668–1688.
- Swadek, R. K., Larson, M., Cullman, G., King, K. L., & Greenfeld, J. (2021). *Wetlands Management Framework for New York City* (p. 52). Natural Areas Conservancy. [https://naturalareasnyc.org/media/pages/wetlands/cf007d5e6f-1621282492/nac\\_wmf\\_final\\_20200317-singles-1-1.pdf](https://naturalareasnyc.org/media/pages/wetlands/cf007d5e6f-1621282492/nac_wmf_final_20200317-singles-1-1.pdf)
- Tansel, B., & Zhang, K. (2022). Effects of saltwater intrusion and sea level rise on aging and corrosion rates of iron pipes in water distribution and wastewater collection systems in coastal areas. *Journal of Environmental Management*, 315, 115153.
- Tarr, J. A. (2001). *The search for the ultimate sink: Urban pollution in historical perspective* (3. [print.]). Univ. of Akron Press.
- Ten Veldhuis, J. A. E. (2011). How the choice of flood damage metrics influences urban flood risk assessment. *Journal of Flood Risk Management*, 4(4), 281–287.
- Ten Veldhuis, J. A. E., & Clemens, F. (2010). Flood risk modelling based on tangible and intangible urban flood damage quantification. *Water Science and Technology*, 62(1), 189–195.
- Ten Veldhuis, M.-C., Clemens, F., Sterk, G., & Berends, B. (2010). Microbial risks associated with exposure to pathogens in contaminated urban flood water. *Water Research*, 44, 2910–2918. <https://doi.org/10.1016/j.watres.2010.02.009>
- Tognin, D., D'Alpaos, A., Marani, M., & Carniello, L. (2021). Marsh resilience to sea-level rise reduced by storm-surge barriers in the Venice Lagoon. *Nature Geoscience*, 14(12), 906–911. <https://doi.org/10.1038/s41561-021-00853-7>
- Triguero-Mas, M., Anguelovski, I., Connolly, J. J. T., Martin, N., Matheney, A., Cole, H. V., Pérez-del-Pulgar, C., Garcia-Lamarca, M., Shokry, G., Argüelles, L., Conesa, D., Gallez, E., Sarzo, B., Beltran, M. A., López-Mañez, J., Martínez-Minaya, J., Oscilowicz, E., Arcaya, M. C., & Baró, F. (2022). Exploring green gentrification in 28 Global North cities: The role of urban parks and other types of greenspace. *Environmental Research Letters*. <https://doi.org/10.1088/1748-9326/ac9325>
- Uccellini, L. W., & Ten Hoeve, J. E. (2019). Evolving the National Weather Service to build a weather-ready nation: Connecting observations, forecasts, and warnings to decision-makers through impact-based decision support services. *Bulletin of the American Meteorological Society*, 100(10), 1923–1942.
- United Nations Office for Disaster Risk Reduction. (2023). *Sendai Framework Terminology On Disaster Risk Reduction: Structural and non-structural measures*. United Nations Office for Disaster Risk Reduction. <http://www.undrr.org/terminology/structural-and-non-structural-measures>
- United States Geological Survey. (2021). *Assessment of compound flood risk from the combined effects of sea level rise on storm surge, tidal and groundwater flooding, and stormwater*. New York Water Science Center: Science. <https://www.usgs.gov/centers/new-york-water-science-center/science/assessment-compound-flood-risk-combined-effects-sea>
- Urban Climate Change Research Network (UCCRN). (2023). *Urban Design Climate Workshops*. UCCRN: Research Projects. <https://uccrn.ei.columbia.edu/urban-design-climate-workshops>
- Usamah, M., Handmer, J., Mitchell, D., & Ahmed, I. (2014). Can the vulnerable be resilient? Co-existence of vulnerability and disaster resilience: Informal settlements in the Philippines. *International Journal of Disaster Risk Reduction*, 10, 178–189.
- USGS. (2016a). *USGS Water Data for the Nation*. USGS National Water Information System. <https://waterdata.usgs.gov/monitoring-location/01302020/>
- USGS. (2016b). *USGS Water Data for the Nation*. USGS National Water Information System. <https://waterdata.usgs.gov/monitoring-location/01311850/>
- USGS. (2024). *Bronx River at NY Botanical Garden at Bronx NY Stream Gage*.





- <https://waterdata.usgs.gov/monitoring-location/01302020/>
- Valiela, I., Chenoweth, K., Lloret, J., Teal, J., Howes, B., & Toner, D. G. (2023). Salt marsh vegetation change during a half-century of experimental nutrient addition and climate-driven controls in Great Sippewissett Marsh. *Science of The Total Environment*, 867, 161546.
- Wahl, T., Jain, S., Bender, J., Meyers, S. D., & Luther, M. E. (2015). Increasing risk of compound flooding from storm surge and rainfall for major US cities. *Nature Climate Change*, 5(12), Article 12. <https://doi.org/10.1038/nclimate2736>
- Walsh, D. C. (1991). The history of waste landfilling in New York City. *Groundwater*, 29(4), 591–630.
- Walsh, D. C., & LaFleur, R. G. (1995). Landfills in New York City: 1844–1994. *Groundwater*, 33(4), 556–560.
- Wamsley, T. V., Cialone, M. A., Smith, J. M., Atkinson, J. H., & Rosati, J. D. (2010). The potential of wetlands in reducing storm surge. *Ocean Engineering*, 37(1), 59–68. <https://doi.org/10.1016/j.oceaneng.2009.07.018>
- Wang, L., Cui, S., Li, Y., Huang, H., Manandhar, B., Nitivattananon, V., Fang, X., & Huang, W. (2022). A review of the flood management: From flood control to flood resilience. *Heliyon*, 8(11), e11763. <https://doi.org/10.1016/j.heliyon.2022.e11763>
- Wang, W., McDowell, N. G., Ward, N. D., Indivero, J., Gunn, C., & Bailey, V. L. (2019). Constrained tree growth and gas exchange of seawater-exposed forests in the Pacific Northwest, USA. *Journal of Ecology*, 107(6), 2541–2552. <https://doi.org/10.1111/1365-2745.13225>
- Ward, P. J., Couasnon, A., Eilander, D., Haigh, I. D., Hendry, A., Muis, S., Veldkamp, T. I. E., Winsemius, H. C., & Wahl, T. (2018). Dependence between high sea-level and high river discharge increases flood hazard in global deltas and estuaries. *Environmental Research Letters*, 13(8), 084012. <https://doi.org/10.1088/1748-9326/aad400>
- Wasley, E., Dahl, T. A., Simpson, C. F., Fischer, L. W., Helgeson, J. F., Kenney, M. A., Parris, A., Siders, A. R., Tate, E., & Ulibarri, N. (2023). Adaptation. In A. R. Crimmins, C. W. Avery, D. R. Easterling, K. E. Kunkel, B. C. Stewart, & T. K. Maycock (Eds.), *Fifth National Climate Assessment*. U.S. Global Change Research Program. <https://doi.org/10.7930/NCA5.2023.CH31>
- Water Environment Federation. (2023). *Rainfall to Results: The Future of Stormwater*. Water Environment Federation. <https://www.wef.org/contentassets/c1067798871547f5a4d2ef0932a930d9/rainfall-to-results.pdf>
- Watson, E. B., Oczkowski, A. J., Wigand, C., Hanson, A. R., Davey, E. W., Crosby, S. C., Johnson, R. L., & Andrews, H. M. (2014). Nutrient enrichment and precipitation changes do not enhance resiliency of salt marshes to sea level rise in the Northeastern US. *Climatic Change*, 125(3–4), 501–509.
- Werner, A. D., & Simmons, C. T. (2009). Impact of sea-level rise on sea water intrusion in coastal aquifers. *Groundwater*, 47(2), 197–204.
- Westra, S., Fowler, H. J., Evans, J. P., Alexander, L. V., Berg, P., Johnson, F., Kendon, E. J., Lenderink, G., & Roberts, N. M. (2014). Future changes to the intensity and frequency of short-duration extreme rainfall. *Reviews of Geophysics*, 52(3), 2014RG000464. <https://doi.org/10.1002/2014RG000464>
- Wigand, C., Roman, C. T., Davey, E., Stolt, M., Johnson, R., Hanson, A., Watson, E. B., Moran, S. B., Cahoon, D. R., & Lynch, J. C. (2014). Below the disappearing marshes of an urban estuary: Historic nitrogen trends and soil structure. *Ecological Applications*, 24(4), 633–649.
- Wing, O. E., Pinter, N., Bates, P. D., & Kousky, C. (2020). New insights into US flood vulnerability revealed from flood insurance big data. *Nature Communications*, 11(1), 1444.
- Wolman, M. G., & Leopold, L. B. (1970). Flood plains. In *Rivers and river terraces* (pp. 166–196). Springer.
- Wong, S. M., L. Gurian, P., Daley, J., Bostrom, H., Matsil, M., & Montalto, F. A. (2020). A preliminary assessment of coastal GI's role during Hurricane Sandy: A case study of three communities. *Urban Water Journal*, 17(4), 356–367. <https://doi.org/10.1080/1573062X.2020.1781909>
- Wong, S. M., & Montalto, F. A. (2020). Exploring the Long-Term Economic and Social Impact of Green Infrastructure in New York City. *Water Resources Research*, 56(11), e2019WR027008. <https://doi.org/10.1029/2019WR027008>
- Woods, N. N., Swall, J. L., & Zinnert, J. C. (2020). Soil Salinity Impacts Future Community Composition of Coastal Forests. *Wetlands*, 40(5), 1495–1503. <https://doi.org/10.1007/s13157-020-01304-6>
- Yarina, L., Mazereeuw, M., & Ovalles, L. (2019). A retreat critique: Deliberations on design and ethics in the flood



- zone. *Journal of Landscape Architecture*, 14(3), 8–23.
- Yeates, A. G., Grace, J. B., Olker, J. H., Guntenspergen, G. R., Cahoon, D. R., Adamowicz, S., Anisfeld, S. C., Barrett, N., Benzecry, A., Blum, L., Christian, R. R., Grzyb, J., Hartig, E. K., Leo, K. H., Lerberg, S., Lynch, J. C., Maher, N., Megonigal, J. P., Reay, W., ... Warren, S. (2020). Hurricane Sandy Effects on Coastal Marsh Elevation Change. *Estuaries and Coasts*, 43(7), 1640–1657. <https://doi.org/10.1007/s12237-020-00758-5>
- Yuan, A., Spira-Cohen, A., Olson, C., & Lane, K. (2024). Immediate Injury Deaths related to the Remnants from Hurricane Ida in New York City, September 1-2, 2021. *Disaster Medicine and Public Health Preparedness*, *Accepted for Publication*.
- Zachry, B. C., Booth, W. J., Rhome, J. R., & Sharon, T. M. (2015). A National View of Storm Surge Risk and Inundation. *Weather, Climate, and Society*, 7(2), 109–117. <https://doi.org/10.1175/WCAS-D-14-00049.1>
- Zahran, S., Brody, S. D., Peacock, W. G., Vedlitz, A., & Grover, H. (2008). Social vulnerability and the natural and built environment: A model of flood casualties in Texas. *Disasters*, 32(4), 537–560.
- Zhang, F., Orton, P. M., Madajewicz, M., Jagupilla, S. C. K., & Bakhtyar, R. (2020). Mortality during Hurricane Sandy: The effects of waterfront flood protection on Staten Island, New York. *Natural Hazards*, 103(1), 57–85.
- Zhang, K., & Chui, T. F. M. (2019). A review on implementing infiltration-based green infrastructure in shallow groundwater environments: Challenges, approaches, and progress. *Journal of Hydrology*, 124089.
- Zimmerman, R., Foster, S., González, J. E., Jacob, K., Kunreuther, H., Petkova, E. P., & Tollerson, E. (2019). New York City Panel on Climate Change 2019 Report Chapter 7: Resilience Strategies for Critical Infrastructures and Their Interdependencies. *Annals of the New York Academy of Sciences*, 1439(1), 174–229. <https://doi.org/10.1111/nyas.14010>

## Acknowledgements

### NPCC Member Flooding Workgroup Co-chairs

*Bernice Rosenzweig, PhD, (Workgroup co-chair), Sarah Lawrence College, Bronxville, NY.*

*Franco Montalto, PhD, (Workgroup co-chair), Drexel University, Philadelphia, PA and eDesign Dynamics LLC (NYC).*

### NPCC Flooding Workgroup Panel Members and Scientific Contributors

*Nicole Maher, PhD, (NPCC panel member) The Nature Conservancy, Cold Spring Harbor, NY.*

*Timon McPhearson, PhD, (NPCC F&T Workgroup co-chair) Urban Systems Lab, The New School, New York, NY and Cary Institute of Ecosystem Studies, Millbrook, NY*

*Philip Orton, PhD, (NPCC panel member) Stevens Institute of Technology, Hoboken, NJ.*

*Eric Sanderson, PhD, (Scientific contributor), New York Botanical Garden, New York, NY.*

*Pablo Herreros-Cantis, (Scientific contributor), PhD candidate, Basque Center for Climate Change, Leioa, ES.*

### Fellows & Interns

*Fiona Dubay (Sarah Lawrence College NPCC Fellow 2022-2023) conducted analyses and created graphics presented in this chapter.*

*Kevin Liu (Drexel University; NPCC Fellow 2022-2023), and Nirajan Adhikari (Drexel University; NPCC Fellow 2022-23) conducted a literature review used to develop tables presented in this chapter.*

*This assessment was also supported by analyses by Nonso Elelleh (Sarah Lawrence College NPCC Fellow 2021), Ivy Steinberg-McElroy (Drexel University NPCC Fellow 2022), Lilliana LoGiudice (Sarah Lawrence College NPCC Fellow 2022), and Isaiah Aguilar (Sarah Lawrence College NPCC Fellow 2022)*

*Post-doctoral researcher Ziyu Chen Stevens Institute of Technology, Hoboken, NJ.*

### Interagency Climate Advisory Team (ICAT) Members

*Alan Olmsted, City Planner, Office of Resiliency Planning & Management, New York City Department of Transportation, New York, NY*

*Erika Jozwiak, Senior Program Manager, Infrastructure, Mayor's Office of Climate and Environmental Justice, New York, NY*

*Mallory Rutigliano, Supervising Analyst, Mayor's Office of Management and Budget, New York, NY*

*Carrie Grassi, Deputy Director, Waterfront Resiliency, Mayor's Office of Climate and Environmental Justice, New York, NY*

*Melissa Umberger, Executive Director of Risk Analysis and Recovery, NYC Emergency Management, New York, NY*

*Jessica Colon, Senior Policy Advisor/Planning, Mayor's Office of Climate and Environmental Justice, New York, NY*

*Tallant Burley, Senior Policy Advisor, Mayor's Office of Climate and Environmental Justice, New York, NY*

### Other Contributors

*Hayley Elszasz, PhD, Climate Science Advisor, Mayor's Office of Climate and Environmental Justice, New York, NY.*

*Janice Barnes, PhD, Managing Partner, Climate Adaptation Partners, New York, NY.*

*Leo Temko, MSc, General Partner, Climate Adaptation Partners, New York, NY.*

*The authors also thank Ronald Busciolano and Kristina Masterson of the U.S. Geological Survey (USGS) - New York Water Science Center for their guidance on availability of USGS data, their participation in work group meetings, and their review of chapter sections related to USGS expertise during development of this chapter.*

***The assessment does not represent the policy position of any agencies whose staff are co-authors.***

**Figure List**

*Figure 1: The four types of floods that impact New York City (pluvial, fluvial, coastal, and groundwater). The impacts of these four flood types can be compounded when they occur in combination resulting in Compound Flooding (Section 8). Figures by the authors, adapted from UK Research and Innovation (UKRI) and the Natural Environment Research Council (NERC) / Ben Gilliland under Creative Commons License CC BY-NC 4.0. .... 6*

*Figure 2: Historic streams and wetlands across the city (left), the FEMA 100-year Special Flood Hazard Area (center), and pluvial flooding resulting from ~3.5-inches of rain per hour with 58-inches of sea level rise (right). Areas where inland streams and coastal wetlands were landfilled for urban development tend now to be topographically low-elevation areas that are exposed to flooding. Areas landfilled to dispose of municipal waste and dredged sediment are now anomalously higher-elevation areas, even when located along the coast. The map of historic streams and wetlands was provided by Eric Sanderson and Lucinda Royte, New York Botanical Garden. .... 7*

*Figure 3: The Flood Susceptibility to Harm and Recovery Index (FSHRI), by census tract across NYC. Areas with higher socioeconomic vulnerability, as indicated by the FVI, may face more adverse effects if exposed to different types of flooding. The FSHRI does not consider exposure to any particular type of flooding. The NYC Flood Vulnerability Index, which includes the FSHRI and exposure to different types of flooding is available on the NYC Mayor's Office Environmental Justice Mapping tool. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College. 13*

*Figure 4: Fatalities in subgrade residences/offices, street flooding and flood-related 311 service requests in NYC during the Ida-Remnants Cloudburst (9/1/2023 - 9/2/2023). Along with 'Street Flooding', flood-related service requests include: 'Sewer Backup', 'Highway Flooding', 'Manhole Overflow', 'Possible Water Main Break', 'Catch Basin Clogged/Flooding', and 'Excessive Water in Basement. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College. .... 17*

*Figure 5: 2- and 3-hour return intervals across the city (during Ida) based on National Center for Environmental Prediction (NCEP) Multi-Resolution, Multi-Sensor (MRMS) Hourly Zip Files, 2021 Quantitative Precipitation Estimates (QPE) (Iowa Environmental Mesonet, 2023). Return intervals presented in these maps are based on NOAA Atlas 14 Intensity-Duration-Frequency (IDF) curves for the Central Park (KNYC) Weather Station. Extremely intense rain progressed from west to east across the city between 6pm and 11pm. Time series of precipitation at the area Automated Surface Observing System (ASOS) weather stations (KEWR: Newark Liberty International Airport; KNYC: Central Park Weather Station; KLGA: LaGuardia Airport; JFK: John F. Kennedy International Airport) are provided in Figure 6. Graphic by BR Rosenzweig. .... 18*

*Figure 6: Hourly (black bars) and cumulative precipitation during the Ida-Remnants Cloudburst on September 1, 2021 (EDT) Cumulative precipitation was determined using 1-minute ASOS observations (blue lines). 1-minute data was not transmitted from the Central Park Station during this event. Cumulative precipitation was calculated based on hourly measurements (black dotted line) for that station. One minute data allows for evaluation of extreme accumulations that do not correspond with hourly measurement intervals. For example, 3.76 inches of rain fell in the 60-minute period between 21:18 and 22:18 at LaGuardia Airport. Graphic by BR Rosenzweig. .... 19*

*Figure 7: 83 high water marks (HWM) such as seed lines, mud, and debris were surveyed by the US Geological Survey in the weeks following the Ida-Remnants Cloudburst. (Finkelstein et al., 2023) Using these observations, land surface inundation was estimated within an 820.2 ft (250m) buffer of each observed HWMs. During the Ida cloudburst, deep inundation from pluvial flooding occurred in areas that were far from the water bodies used as the basis of FEMA SFHA modeling. Flooding from this event was not limited to areas where HWMs were obtained, and also occurred in areas of the city that were not surveyed or where HWMs could not be identified. Several inundated areas are highlighted here and all HWM data from this survey can be viewed at: <https://stn.wim.usgs.gov/fev/#2021Ida>. Map by BR Rosenzweig. .... 20*

*Figure 8: NYCHA developments with buildings that would be exposed to pluvial flooding from a moderately intense (~2 inches in one hour) rain event. NYCHA buildings represent less than 1% of the total buildings inundated under this scenario. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College. .... 22*

*Figure 9: 1-2 family residential buildings with basements that would be exposed to pluvial flooding from a moderately intense (~2 inches in one hour) rain event. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College. .... 23*

*Figure 10: NYCHA developments that would be exposed to pluvial flooding during an extreme rain event (~3.5 inches per hour) with 58 inches of sea level rise, as modeled for the Stormwater Resiliency Plan (City of New York Mayor's Office of Resiliency, 2021). The inundated NYCHA buildings represent less than 1% of the total buildings inundated under this scenario, but nearly a third (30.1%) of NYCHA affordable public housing buildings. Map by NPCC4 Fellow Fiona Dubay, Sarah Lawrence College. .... 25*

*Figure 11: Stream stage in the Bronx River during the Ida-remnants cloudburst. The river remained above major flood stage for over 18 hours (from 11:30pm EDT on 9/1/2021 through 6:15pm EDT on 9/2/2021) SOURCE: Bronx River at*

NY Botanical Garden Stream Gauge (2024). Graphic by B.R. Rosenzweig ..... 27

Figure 12: 1-2 family residential buildings with basements in areas of the city that would be exposed to fluvial flooding during a storm with a 100-year return interval (1% annual probability). As a result of the historic filling of most of NYC's natural streams, exposure to fluvial flooding has largely been replaced by exposure to pluvial flooding and is now very limited compared to other types of flooding. However, areas adjacent to the Bronx River and small surface streams in Staten Island exposed. Source: Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 28

Figure 13: Observed water levels and 311 service requests related to flooding (bottom panel) around NYC from December 22-24, 2022. Tide gauge locations are provided in Figure 14. National Weather Service flood thresholds and Post Tropical Cyclone Sandy are shown as horizontal lines for comparison. Figure by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College..... 30

Figure 14: Street flooding and flood-related 311 service requests in NYC on December 23, 2022. Along with 'Street Flooding', flood-related service requests include: 'Sewer Backup', 'Highway Flooding', 'Manhole Overflow', 'Possible Water Main Break', 'Catch Basin Clogged/Flooding', and 'Excessive Water in Basement. During this event, street flooding requests are concentrated in coastal areas, particularly along Jamaica Bay. Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College..... 31

Figure 15: New York City Housing Authority (NYCHA) buildings in coastal areas exposed to 100-year (1% annual probability) storm surge flooding. Source: Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 32

Figure 16: 1-2 residential unit buildings with basements located in the Preliminary FEMA Special Flood Hazard Area adjacent to the coast. Source: Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 33

Figure 17: The Flood Vulnerability Index (FVI) 1-2 residential unit buildings with subgrade spaces in coastal areas exposed to present-day flooding from tide levels at the Mean Monthly High Water (MMHW). Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College..... 34

Figure 18: New York City Housing Authority (NYCHA) buildings in coastal areas that are projected to be exposed to flooding from the Mean Monthly High Water (MMHW) with 58 inches (1.47m) of sea level rise (NPCC3 2080 Scenario). Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 35

Figure 19: 1-2 residential unit buildings with subgrade spaces in coastal areas that are projected to be exposed to flooding from the Mean Monthly High Water (MMHW) with 58 inches (1.47m) of sea level rise (NPCC3 2080 Scenario). Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 36

Figure 20: Shallow groundwater and subgrade infrastructure in East New York--Lindenwood. Subgrade subway tracks in this area already require pumping due to shallow groundwater. In 2010, the New York City Department of Environmental Protection reported groundwater flooding in response to a street flooding service request in this area. Map by BR Rosenzweig..... 38

Figure 21: NYCHA buildings located in areas underlain by shallow (< 10 foot) groundwater. Depth-to-water data are currently only available for the NYC boroughs of Brooklyn and Queens. Source: Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 39

Figure 22: 1-2 residential unit buildings with subgrade spaces located in areas underlain by shallow (<10 feet) groundwater. Source: Map by NPCC4 Fellow Fiona Dubai, Sarah Lawrence College. .... 40

Figure 23: Sea level rise and surficial groundwater at an idealized shoreline. Figure by the authors. .... 41

Figure 24: Evolution of flood risks for people as a function of urbanization, climate change, and adaptation pathways. The yellow boxes represent increases in flood risk due to climate change. The heights of the green, grey, and blue bars represent NYC flood risks in pre-developed, conventionally developed, and adapted/transformed states, respectively. The solid arrow represents the increase in flood risk due to historical urbanization. The dotted arrows represent alternative adaptation pathways as could emerge participatory, multi-stakeholder decision making processes use to plan FRM Source: (Figure credit: FA Montalto)..... 44

Figure 25: Structural and Non-Structural approaches for addressing the human and ecological impacts of floods. Some portions of this figure were adapted from Wasley et al. (Wasley et al., 2023) Graphic by FA Montalto. .... 46

Figure 26: Precipitation accumulations of recent extreme events and NYCDEP design storm depths. CP, JFK, and LGA refer to one minute precipitation data obtained from the gauges at Central Park, John F. Kennedy Airport, and LaGuardia Airport, respectively. The horizontal dotted black and red lines refer to the design rainfall depths used to design stormwater management practices for sites and houses, respectively, when they are connected to combined sewers. House connections apply to 1, 2, or 3 family dwellings less than 20,000 square feet in total site area that connect to a sewer that fronts the house. Site connections refer to all other connections to combined sewers (Figure credit: FA Montalto)..... 50

Figure 27: Cloudburst roads (starting upper left) are designed to convey runoff generated during extreme events on the surface to places where that can flood safely. Elevated curbs, recontoured street cross sections, and slightly depressed intersections are used to direct the flood waters. Retention roads (second down, left) are designed to retain and detain flood waters in subgrade cisterns, vaults, and curbside planters integrated into the right-of-way. This approach is similar to NYCDEP's current Cloudburst standards. Retention spaces (third down, left) retain and store floodwater in multifunctional urban spaces such as depressed parking areas, squares, gardens, and recreational fields. Examples from Copenhagen, Denmark: Tåsinge Plads (1), Scandiagade (2-4), and Enghavepark (5). Finally, Green roads (bottom, left) are designed to remove and retain water on smaller roads and alleys. Photos 1-4 courtesy of Troels Heien, Photo 5 courtesy of Anders Pedersen. Diagrams courtesy of the City of Copenhagen. ....55

**Table List**

Table 1. Flood Hazard Maps used for exposure assessment in this chapter. It is important to note that each layer is associated with different probabilities of annual occurrence. **Maps of Present-Day Hazard Areas** ..... 10

Table 2: Flooding events that caused 52 direct deaths in NYC since 1987. Additional fatalities from vehicle accidents associated with storm conditions are not included in this table. .... 12

Table 3: Indicators used in the Preliminary NYC FSHRI ..... 13

Table 4: 60-minute rainfall accumulation in inches at selected AEPs (return intervals). Contemporary precipitation values are from NOAA Atlas 14 at the Central Park Weather Station. Future precipitation projections are based on the mean citywide delta change factors derived from an ensemble of climate models using the LOCA2 downscaling method for SSP245 (mid-century greenhouse emissions reduction) and SSP585 (unmitigated climate change). Values in parentheses represent the 10<sup>th</sup> and 90<sup>th</sup> percentile values at Central Park, and their projections based on the citywide mean change factor. .... 24

Table 5: Historic major flood events (stage above 4ft) observed at the Bronx River Stream Gauge at NY Botanical Garden (2007-2023): SOURCE: USGS Bronx River Stream Gauge (2024) ..... 26

**Equation List**

Equation 1: Return Period – where R = The Return Period (years), also known as the Annual Recurrence Interval (ARI); P = Probability of occurrence in any given year (# occurrences / # years analyzed), also known as the Annual Exceedance Probability (AEP) ..... 9